



| 2025

PRODUCT LIST

CHENBRO

CONTENTS



01 PART NUMBERS

Rackmount Chassis	04
Tower Chassis	07
Barebones Servers	08
Storage Kits & Accessories	09

02 BILLS OF MATERIAL

Rackmount Chassis

RM13304	13
RM13310	16
RM14300	17
RM14604	18
RM14610	21
RM23804	23
RM23808	25
RM23812	27
RM23824	30
RM241	33
RM24504	36
RM24508_12	38
RM252	40
RM252 (MIO)	41
RM253	42
RM31616	43
RM352	44
RM413	45
RM41824	48
RM42200	49
RM423	50
RM43736	52
RM43348	53

JBOD Storage Chassis

DS252	54
DL252	55

Barebone Server Products

RB146	56
RB151CYP	57
RB151FCP	58
RB245	59
RB251CYP	60
TB115	62

Tower Chassis

SR10569	64
SR10769	66
SR113	68
SR115	69
SR20969	71
SR30169	73

Rackmount Chassis

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
RM133	RM13304T3FP8MR	RM1330402-01*907980	26", 3.5" 4Bay, Dual Low Profile, w/PSU+SAS, 12G+Riser Card+I/O, Single
RM133	RM13304T3FP5	RM13304H01*14530	26", 3.5" 4Bay, w/SAS+LED PCB+Tray+HDD Cage +Fan+PSU+USB 3.0, Single+Pallet
RM133	RM13304T3RP6	RM13304H01*14529	26", 3.5" 4Bay, w/SAS+LED PCB+Fan(NMB)+RPSU +USB3.0+Tray+HDD+Cage+Riser Dummy
RM133	RM13304T3RP6(new)	RM13304-0040A0	26", 3.5" 4Bay, SAS/SATA, 4x4028, RPSU (1+1), 650W, Single+Pallet, A00
RM133	(LFF) (Tri-M G4) (FP5)	RM13304-0050A0	26", 3.5" 4Bay, 4T4S Gen4, 4x4056, Single,500W, CRPS+PDB, Single+Pallet, A00, FSD059-7HCG
RM133	(LFF) (Tri-M G4) (RP6)	RM13304-0060A0	26", 3.5" 4Bay, 4T4S Gen4, 4x4056, RPSU (1+1), 650W, Single+Pallet, A00, R1BU5651A
RM133	RM13310M3RP6(new)	RM13310-0070A0	26", 2.5" 10Bay, SAS/SATA, 4x4028, RPSU (1+1), 650W, Single+Pallet, A00, R1BU5651A
RM133	(SFF) (SAS/SATA) (FP5)	RM13310-0060A0	26", 2.5" 10Bay, SAS/SATA, 4x4056, Single CRPS +PDB, 500W, Single+Pallet, A00, FSD059-7HCG
RM133	(LFF) (SAS/SATA) (MIO) (RP7)	RM1330403-0010A0	25.94", 2.5" 2Bay+3.5" 4Bay+1Bay Slim ODD, 750W, SAS/SATA, 6x4028, RPSU (1+1), 10pcs/Pallet
RM133	(LFF) (Tri-M G4) (MIO) (RP7)	RM1330403-0020A0	25.94", 2.5" 2Bay+3.5" 4Bay+1Bay Slim ODD, 750W, 4T Gen4, 6x4028, RPSU (1+1), 10pcs/Pallet
RM143	RM14300S1FP2	RM14300H04*14913	15", 4Bay, Screw On, w/PSU+HDD Holder, Single
RM143	RM14302T3FP5SR	RM1430201-01*912659	16.06", 2.5" 2Bay, RIO, w/PSU, Single+Pallet
RM143	RM14302T3FP5SRU1	RM1430201-02*912657	16.06", 2.5" 2Bay, FIO, w/PSU, Single+Pallet
RM146	RM14604T3FP4+	RM14604-0040B0	21.5", 3.5" 4Bay+Slim ODD, SAS/SATA, 3x4028, CRPS+PDB, 400W, 1pcs/Ctn, B00, w/Tray+USB 3.0
RM146	RM14604T3-R350+	RM14604-0100C0	21.56", 3.5" 4Bay, Silver, SAS/SATA, 3x4028, RPSU (1+1), 350W, Single
RM146	RM14604T3-R350+(new)	RM14604-0180A0	21.5", 3.5" 4Bay, SAS/SATA, 4x4028, RPSU (1+1), 350W, Single, A00, YH5401-1RA09R
RM146	(LFF)(SAS/SATA) (FP5)(Fan56)	RM14604-0170A0	21.5", 3.5" 4Bay, SAS/SATA, 4x4056, Single CRPS +PDB, 500W, A00, FSD056-7HCG
RM146	(LFF) (SAS/SATA) (RP4)(Fan56)	RM14604-0190A0	21.5", 3.5" 4Bay, SAS/SATA, 4x4056, RPSU (1+1), 450W, A00, YVIC0450AH-5A00P20
RM146	(LFF) (Tri-M G4) (FP5)	RM14604-0160A0	21.5", 3.5" 4Bay, 4T4S Gen4, 4x4028, Single CRPS +PDB, 500W, 1pcs/Ctn, A00
RM146	(LFF) (Tri-M G4) (FP5)(F56)	RM14604-0200A0	21.5", 3.5" 4Bay, 4T4S Gen4, 4x4056, Single CRPS +PDB, 500W, A00, FSD059-7HCG
RM146	(LFF) (Tri-M G4) (RP4)(F56)	RM14604-0210A0	21.5", 3.5" 4Bay, 4T4S Gen4, 4x4056, RPSU (1+1), 450W, A00, YVIC0450AH-5A00P20
RM146	(SFF) (SAS/SATA) (FP5)(F56)	RM14610-0010A0	21.5", 2.5" 10Bay, SAS/SATA, 4x4056, Single CRPS +PDB, 500W, A00, FSD059-7HCG
RM146	(SFF) (SAS/SATA) (RP4)(F56)	RM14610-0020A0	21.5", 2.5" 10Bay, SAS/SATA, 4x4056, RPSU (1+1), 450W, A00, YVIC0450AH-5A00P20
RM238	RM23812E3RP8	RM23812H01*15457	3.5" 12Bay, CRPS, w/PSU+Mini SAS HD, 12G+Tray +Fan+Ear BK CC1012/BL CC8103 (#285C)
RM238	RM23812E3RP8(T)	RM23812-0120A0	26", 3.5" 12Bay, SAS3 Expander, 3x8038, CRPS (1+1), 800W, Single+Pallet
RM238	RM23808M3RP8U5	RM23808H03*15127	3.5" 8Bay, CRPS, w/PSU+12G Mini SAS+Tray+Fan +Ear BL CC8103 (#285C), Single+Pallet
RM238	RM23808M3RP8U5(T)	RM23808-0090A0	26", 3.5" 8Bay, SAS/SATA, 3x8038, CRPS (1+1), 800W
RM238	RM23808M3RPCC1	RM23808H03*15778	3.5" 8Bay, CRPS, BK CC1012/BL CC8103, w/PSU+Mini SAS BP+Riser Card+Fan
RM238	RM23804T3RP5	RM23804H01*15507	3.5" 4Bay, CRPS Type, CC1012, w/PSU+SAS, 12G +Tray+Fan+USB 3.0/LED+Low Profile (EN62368)
RM238	(LFF) (SAS/SATA) (RP8)	RM23804-0020A0	26", 3.5" 4Bay, SAS/SATA, 3x8038, CRPS (1+1), 800W, Single+Pallet, A00
RM238	(LFF) (Tri-mode) (RP5)	RM23804-0030A0	26", 3.5" 4Bay, 4T4S Gen4, 3x8038, CRPS (1+1), 550W, Single+Pallet, A00
RM238	(LFF) (Tri-mode) (RP8)	RM23804-0040A0	26", 3.5" 4Bay, 4T4S Gen4, 3x8038, CRPS (1+1), 800W, Single+Pallet
RM238	(LFF) (SAS/SATA) (RP12)	RM23808-0130A0	26", 3.5" 8Bay, SAS/SATA, 3x8038, CRPS (1+1), 1200W
RM238	(LFF) (EXP) (RP12)	RM23812-0210A0	26", 3.5" 12Bay, SAS/SATA, EXP, 3x8038, CRPS (1+1), 1200W, Single+Pallet, A00

Rackmount Chassis

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
RM238	(LFF) (Tri-M 8T4S) (RP8)	RM23812-0220A0	26", 3.5" 12Bay, 8T4S Gen4, 3×8038, CRPS (1+1), 800W, Single+Pallet
RM238	(LFF) (Tri-M 8T4S) (TRP8)	RM23812-0230A0	26", 3.5" 12Bay, 8T4S Gen4, 3×8038, CRPS (1+1), 800W, Single+Pallet
RM238	(LFF) (Tri-M 8T4S) (RP12)	RM23812-0240A0	26", 3.5" 12Bay, 8T4S Gen4, 3×8038, CRPS (1+1), 1200W, Single+Pallet
RM238	(SFF)(16 SAS/SATA Exp)(RP12)	RM23824-0140A0	26", 2.5" 16Bay, SAS/SATA, SAS3 Expander, 3×8038, CRPS (1+1), 1200W, A00, w/HDD Dummy
RM238	8(N,gen 5)+8 (S) (RP12)	RM23824-0150A0	26", 2.5" 16Bay, SAS/SATA, NVMe Gen5, 3×8038, CRPS (1+1), 1200W, A00, w/HDD Dummy
RM238	(16N, Gen5),(RP12)	RM23824-0160A0	26", 2.5" 16Bay, NVMe Gen5, 3×8038, CRPS (1+1), 1200W, A00, w/HDD Dummy
RM238	(SAS/SATA, 8 +16 exp.) (RP12)	RM23824-0170A0	26", 2.5" 24Bay, SAS/SATA, SAS3 Expander, 3×8038, CRPS (1+1), 1200W, A00
RM238	8N,Gen 5+ SAS/SATA 16, exp, RP12	RM23824-0180A0	26", 2.5" 24Bay, NVMe Gen5, SAS3 Expander, SAS/SATA, 3×8038, CRPS (1+1), 1200W
RM238	3 x 8N, Gen5, RP12	RM23824-0190A0	26", 2.5" 24Bay, NVMe Gen5, 3×8038, CRPS (1+1), 1200W, Single+Pallet
RM241	RM24100-L2U3	RM24100-0080C0	18", 1×8032, 1pcs/Ctn, C00, w/Front Door, 1×5.25+1×3.5, 2×3.5 Fixed HDD, LP, USB 3.0
RM241	RM24100-LU3	RM24100-0110C0	18", 1×8032, C00, Low Profile Rear Window, USB 3.0, w/PSU Bracket (PS2), Single+Pallet
RM241	RM24100FP8	RM24100-0170C0	18", Silver, 1×8032, CRPS (1+0), 800W, Single
RM241	RM24100FP5	RM24100-0130C0	18", 1×8032, Flex/ATX, 500W, Single
RM241	RM24100RP5	RM24100-0190C0	18", 1×8032, CRPS (1+1), 550W, Single
RM241	RM24100-L	RM24100H01*15651	BK CC1012, Low Profile Rear Window, w/Fan, Single+Pallet
RM241	RM24100-L2	RM24100H01*15650	BK CC1012, Low Profile Rear Window, w/Panel, Two Door+Fan, Single+Pallet
RM241	RM24100-S400L2U3	RM24100-0120C0	18", Bezel Black, 1×8032, Flex/ATX, 400W, Single, USB 3.0
RM241	RM24100-S600L2U3	RM24100-0060C0	18", Bezel Black, 1×8032, Flex/ATX, 600W, Single, USB 3.0
RM245	RM24504T3RP5	RM24504H01*15508	3.5" 4Bay, CRPS, RM24504, CC1012, w/PSU+SAS, 12G+Tray+Fan+USB 3.0/LED, Low Profile (EN62368)
RM245	RM24504T3FP5	RM24504H01*15509	3.5" 4Bay, CRPS Type, CC1012, w/PSU+SAS, 12G+Tray+Fan+USB 3.0/LED, Low Profile
RM245	RM24508M3FP5	RM24508H02*15946	3.5" 8Bay, CRPS, w/PSU+Mini SAS HD, 12G+3.5" HDD Tray, Single+Pallet
RM245	RM24508M3RP5	RM24508H02*15167	3.5" 8Bay, CRPS, w/PSU+Mini SAS HD, 12G+Tray+Fan+USB 3.0, Single+Pallet
RM245	RM24508M3RP5	RM24508H02*15964	3.5" 8Bay, CRPS, w/RPSU+Mini SAS HD, 12G+Tray+Fan+USB 3.0, Single+Pallet
RM245	RM24512E3RP5	RM24512H03*14461	3.5" 4Bay, CRPS, RM24504, CC1012, w/PSU+SAS, 12G+Tray+Fan+USB 3.0/LED, Low Profile (EN62368)
RM245	(LFF) (4T) (RP5)	RM24504-0070A0	22", 3.5" 4Bay, Black, 4T4S Gen4, 3×8038, CRPS (1+1), 550W, Single+Pallet
RM245	RM24512M3-R550L	RM24512H03*14465	3.5" 12Bay, w/Mini SAS HD+Tray+Hot-Swap Fan+USB 3.0×2+Fan Bar (PCBA×4)+PSU+Cable+LP
RM245	(LFF) (Tri-M 8T4S) (RP5)	RM24512-0120A0	22", 3.5" 12Bay, Black, 8T4S Gen4, 3×8038, CRPS (1+1), 550W, Single+Pallet
RM252	RM25204T3RP8	RM25204H01*15669	2.5" 4Bay, w/PSU+SAS, 12G+Fan+2.5" HDD Tray, Single+Pallet, for OTS
RM252	RM25204N4RP8	RM25204H01*15867	2.5" 4Bay for OTS, w/PSU+NVMe 2N, 16G+NVMe 2N, 16G+2.5" HDD Tray, Single+Pallet
RM253	RM2532401-0010A0	RM2532401-0010A0	34.65", 3.5" 24Bay, SAS3 Expander, 6×6038, CRPS (1+1), 1200W, Single, 8pcs/Pallet, for EEB
RM316	RM31616-0030FO	RM31616-0030FO	26", SAS3 Expander, 4×8038, CRPS (1+1), 1200W, Rail, Single+Pallet
RM352	RM35206T3RPF	RM35206H01*15671	17.7", 2.5" 6Bay, Silver, w/PSU+SAS, 12G+Fan+2.5" HDD Tray, Single+Pallet
RM352	RM35206-0100A0	RM35206-0100A0	17.7", 2.5" 4Bay, NVMe Gen4, 4×8038, CRPS (1+1), 1600W, Single+Pallet, A00, w/HDD Cage Dummy
RM413	RM41300-F	RM41300H02*12185	12×13" M/B, 5.25" Bay×3+3.5" Bay×5, 12cm Fan, 21.5", CC1012, Single

Rackmount Chassis

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
RM413	RM41300-F1	RM41300H02*12186	12x13" M/B, 5.25" Bayx3+3.5" Bayx5, 12cm Fan, 21.5", BK CC1012, w/One-Door, Single
RM413	RM41300-FIU3	RM41300-0080E0	22.19", 1x12025, Single+Pallet, 1pcs/Ctn, E00, 12cm Fan, 21.5", USB 3.0, w/One-Door
RM413	RM41300-0120E0	RM41300-0120E0	21.5", 3.5" 5Bay+5.25" 3Bay ODD, 1x12025, 2x8025, CRPS (1+1), 800W, Single+Pallet
RM413	RM41300-0030E0	RM41300-0030E0	21.5", 3.5" 5Bay+5.25" 3Bay ODD, 1x12025, 2x8025, Single+Pallet
RM418	RM41824-0010G0	RM41824-0010G0	27.4", 3.5" 24Bay, SAS3 Expander, 4x8038, 1200W, CRPS (1+1), G00, w/3.5" Tray+Card Retainer
RM422	RM42200-1U3	RM42200H13*13814	BK CC1012, Single, USB 3.0, w/Single
RM423	RM42300-F	RM42300H02*15325	12x10.5" M/B, 5.25" Bayx3+3.5" Bayx5, 12cm Fan, 17.5", CC1012, Single+Pallet
RM423	RM42300-F1	RM42300H02*15326	12x10.5" M/B, 5.25" Bayx3+3.5" Bayx5, 12cm Fan, 17.5", CC1012, w/Panel, Single+Pallet
RM423	RM42300-FIU3	RM42300H11*13739	12x10.5" M/B, 5.25" Bayx3+3.5" Bayx5, 12cm Fan, 17.5", CC1012, USB 3.0, One Door w/LED Cover
RM423	RM42300-FIU3RP8	RM42300-0170E0	18.32", 5.25" 3Bay ODD+1Bay Slim, 1x12025, CRPS (1+1), 800W, Single+Pallet, E00
RM437	RM43736E3RPCU1	RM43736-0010A0	26", 3.5" 36Bay, SAS3 Expander, 7x8038, CRPS (1+1), 1200W, Rail, Single
RM438	RM43348-0010C0	RM43348-0010C0	32.2", 3.5" 48Bay, SAS/SATA, 4x8056, CRPS (1+1), 1200W, Rail, Double Ctn+Pallet, C01
RM245	RM24504T3RP8G1	RM24504H03*15792	22", 3.5" 4Bay+5.25" 2Bay ODD, w/PSU+Riser Card, 8G+SAS, 12G+3.5" HDD Tray+Conn.+Fan
DS252	DS25224DD3RP5	DS2522400-01*910796	17.7", 2.5" 24Bay, w/PSU+SAS/SATA, 8S, 12G+, 8pcs, Interposer+Expander+BMC+2.5" Tray, OTS JBOD
RM252	RM2520401-0010A0	RM2520401-0010A0	17.7", 2.5" 6Bay, NVMe Gen4, SAS/SATA, 4x8038, CRPS (1+1), 1200W, RIO, MIO
RM252	RM2520401-0020A0	RM2520401-0020A0	17.7", 2.5" 6Bay, NVMe Gen4, SAS/SATA, 4x8038, CRPS (1+1), 1200W, RIO, LP, Support #6.5 Slot MB

Tower Chassis

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
SR105+	SR10569-C4+	SR10569H09*14541	BK CC1012, w/Fan Support (8cm), Fan, Single Plus Internal 3.5" HDD Cage, USB
SR105+	SR10569-C4+-R800	SR10569-0040A0	3-Bay 5.25" ODD, Black Bezel, 1 x 8025 Fan, CRPS (1+1), 800W, Single, w/ Pallet
SR105+	SR10569-C4+-R1200	SR10569-0020A0	Server, 3-Bay 5.25" ODD, Black Bezel, 1 x 8025 Fan, CRPS (1+1), 1200W
SR107+	SR10769-C8+	SR10769H09*14584	BK CC1012, w/ Internal 3.5" HDD Cage, Fan w/ Finger Guard, Cable, Single, w/ Pallet
SR107+	SR10769-C8+-R800	SR10769-0030B0	Bezel, 1 x 12025 Fan, CRPS (1+1), SR, 2 x USB 3.0 Plus 3.5" x 8 Internal HDD Cage w/ Fan, 800W
SR107+	SR10769-C8+-R1200	SR10769-0040B0	3-Bay 5.25" ODD, Black Bezel, 1 x 12025 Fan, CRPS (1+1), 1200W, Single, w/ Pallet
SR113	SR11308M3RPJ	SR11369H01*15554	4U, BK CC1012, w/ 2K PSU, Mini SAS HD 12G, Fan, 3.5" Tray, Internal Switch, Single, w/ Pallet
SR209+	SR20969-C4+	SR20969H11*14542	Workstation, BK CC1012, w/Fan Support (8cm), Fan, Plus Internal 3.5" HDD Cage, USB
SR209+	SR20969-C4+-400	SR20969-0020B0	BK Bezel, 1 x 8025 Fan, Single 400W, SR, Plus 3.5" x 4 Internal HDD Cage, 2 x USB 3.0
SR209+	SR20969-C4+-R800	SR20969-0010B0	3-Bay 5.25" ODD, Black Bezel, 1 x 8025 Fan, CRPS (1+1), 800W, Single
SR209+	SR20969-C4+-R1200	SR20969-0030B0	Workstation, 3-Bay 5.25" ODD, Black Bezel, 1 x 12025 Fan, CRPS (1+1), 1200W, Single
SR301	SR30169T3FP3U1	SR30169H01*15676	Mini Server, Black CC1012 / Silver CC0002, w/ PSU, SAS 12G, Fan, Power Cord, Single
SR301	SR30169-0010A0	SR30169-0010A0	Mini Server, 4-Bay 3.5", BK, SAS/SATA, 1 x 12025 Fan, Single CRPS PDB, 300W, Single
SR115	SR11569-0030A0	SR11569-0030A0	Workstation, 4-Bay 3.5", BK Bezel, 1x12025 Fan, 1x8025 Fan, Mid Fan, Internal Cage, w/Pallet (A00)
SR115	SR11569-0040B0	SR11569-0040B0	Server, BK Bezel, SAS/SATA, 1 x 8025 Fan, 1 x 12025 Fan, CRPS (1+1), 800W

Barebone Server Products

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
RB146	RB1460401-0010A0	RB1460401-0010A0	21.5", 3.5" 4Bay, 381-E0000-0002A0, 400W (E3C252D4U), SAS/SATA, 4×4028, Flex/ATX
RB151	RB15112N4RCPU1	RB1511202-002000	30.3", 2.5" 12Bay, M50FCP2SBSTD, NVMe Gen4, 8×4056, CRPS (1+1), 1300W, Rail
RB251	RB25112E3RPJSTD	RB2511202-01*899509	30.3", 3.5" 12Bay, M50CYP2SBSTD, Rail+PSU+Mini SAS HD Expander, 12G+Heatsink+Riser+Fan
TB115	TB1156901-0010A0	TB1156901-0010A0	4Bay 3.5"+5.25" 2Bay ODD, BK, MU72-SU0, 1200W SAS/SATA, 1×8025+2×8038+1×12025, PS2/ATX
RB245	RB24508M3FP5D4U	RB24508-0010A0	2U, 21.94", 3.5" 8Bay, Slim ODD, ASROCK B650D4U, SAS/SATA, 3×8038, Flex/ATX, 500W

Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
Accessory	384-MEC000327BA0	384-MEC000327BA0	SR113/SR115 Rackmount Ears (Set, Left & Right), 50/Cartron
Accessory	384-MEC01160B0A0	384-MEC01160B0A0	AS'Y Component, SR1156901, GPU & Fan Support Bracket, Bulk, 40pcs/CTN
Accessory	84H210510-004	84H210510-004	Mounting Ear Set, 2x Handles, BK
Accessory	84H210710-035	84H210710-035	Rackmount Ears (BK), For SR107/SR107+ (2pcs/set)
Accessory	384-MEC01167B0A0	384-MEC01167B0A0	AS'Y Component, RM42300, Rear Window, 7-slot, Bulk, 20pcs/CTN
Accessory	84H342210-002	84H342210-002	Foot Stand, BK, RM422/RM413/RM423
Accessory	84H314310-007	84H314310-007	HDD Bracket, 3.5"+2.5" HDD Bracket Tool-Less
Accessory	84H314910-092	84H314910-092	Non Tool-Less HDD Bracket, 1X3.5"+1X2.5", RM14300
Accessory	84H331610-024	84H331610-024	Bracket, 2.5" (2pcs), RM31616
Accessory	84H313210-018	84H313210-018	I/O Gasket (w/Squar Ehole)
Accessory	88H321400-001	88H321400-001	Rear Window, STD RW, w/Riser BKT, Srant off+Screws
Accessory	84H342910-012	84H342910-012	ODD Cage KIT, for Tower Application, RM413/RM423
Accessory	34H013100-014	34H013100-014	Power Cord, USA, 3PIN, General, RM32910e04, Phino
Accessory	384-14609-3102A0	384-14609-3102A0	Ear Bracket, Diacast Style
Bezel	84H324110-015	84H324110-015	AS'Y Component, RM24100, Panel, Two Door, 20pcs/CTN
Bezel	384-14605-3100A0	384-14605-3100A0	Panel, RM14604, BK CC1012/BK CC1012, Bulk+Pallet, 18Box/CTN, for OTS
Bezel	384-23705-3106B0	384-23705-3106B0	Front Panel for 2U, w/o Key Lock, 18Box/12CTN/Pallet (RM245/RM238/RM237)
Bezel	384-23705-3107B0	384-23705-3107B0	Front Panel for 2U, w/Key Lock, 18Box/12CTN/Pallet (RM245/RM238/RM237)
Bezel	84H341310-005	84H341310-005	Two Doors, RM413/423
Bezel	84H341310-004	84H341310-004	One Door, RM413/423
Bezel	384-14605-3118A0	384-14605-3118A0	BK, Wave Style with Key Lock
Bezel	84H331610-016	84H331610-016	Silfox Panel, RM31616, BK CC1012+AL, 2pcs/10Box/CTN
Bezel	384-23805-3108A0	384-23805-3108A0	BK, 2U Wave Style, with Key Lock
Bracket	84H533510-011	84H533510-011	3.5" to 2.5" Adapting Bracket, for SATAII HDD
Cables	84H314310-004	84H314310-004	Cable, USB3.0, RM14300 w/Bracket
Cables	84H342310-012	84H342310-012	Cable, w/PCB 80H02342301A0, USB3.0
Fan	384-11311-2100A0	384-11311-2100A0	Rear GPU Hot-swap Fan Module for External (8038,PWM,11000RPM) (Max to 2 pcs)
Fan	384-FAN000003BA0	384-FAN000003BA0	Rear CPU Fan Module for Internal (Max to 2 pcs) (8038,PWM,8200RPM)
Fan	384-FAN00114B0A0	384-FAN00114B0A0	Fan kit, 1x8025 (4500RPM) Fan Holder, Bulk, 30pcs/CTN, SR115 (Rear)
Fan	384-FAN00118B0A0	384-FAN00118B0A0	Fan kit, 1x12025 (2600RPM) Fan Holder, Bulk, 48PCS/CTN, SR115 (Middle)

Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
Fan	384-23811-3101A0	384-23811-3101A0	Fan Module, 80mm, T38, PWM, L70mm w/Plastic Holder and Male Hot-swap PCBA
Fan	384-23811-3102A0	384-23811-3102A0	1x8038 +2.5 HDD Cage+Air Duct 18Pcs/CTN
Fan	84H000010-060	84H000010-060	80mm Ball Bearing Fan with Finger Guard, Rear SUNON (RM413/RM422/RM423/RM43348)
Fan	30H080032-101	84H324210-004	Fan Set, 8032, 4400RPM, YS (RM24200)
Fan	384-FAN00297B000	384-FAN00297B000	Rear Fan Set for SK628
Fan	384-MIX00429B0A0	384-MIX00429B0A0	FRU, Fan module, 8038 (11000RPM) (NIDEC) For RM252/RM352 RIO
Fan	84H331610-047	84H331610-047	80xT25MM, L300MM, BALL, 4500RPM, 4P4C, SUNON
Fan	384-24211-3200A0	384-24211-3200A0	MIX, 4CM Fan(NMB), RM24200
Fan	384-FAN00439B0A0	384-FAN00439B0A0	40 (T:28mm), 23, 000RPM, L200MM, SUNON
Fan	384-FAN00283B0A0	384-FAN00283B0A0	40 (T:56mm), 22500/20500RPM, NIDEC
Fan	384-23811-3106A0	384-23811-3106A0	80x80x38, 11000RPM, PWM, NIDEC, L70MM, 4P4C Single, Ball
HDD Tray	384-14602-3150A0	384-14602-3150A0	3.5" HDD Tray (383-14655-3040B0), 20Pcs/CTN
HDD Tray	384-TRY00014B0A0	384-TRY00014B0A0	3.5" HDD Tray (383-14655-3039B0), 50Pcs/CTN
HDD Tray	384-14602-3119B0	384-14602-3119B0	HDD 2.5"Tray
HDD Tray	84H313110-022	84H313110-022	HDD 2.5"Tray (SPTE material)
HDD Tray	83H555512-001	83H555512-001	HDD 2.5"Tray of SK51201
HDD Tray	384-41702-3102A0	384-41702-3102A0	AS'Y Component 3.5" Tray (#383-41755-3018A0) BK/BLCC8103(#285C), 50Pcs/CTN
HDD Tray	383-14655-3008C0	384-TRY00139B0A0	HDD 3.5"Tray LFF Tool-less, Black/Yellow
HDD Tray	383-14655-3011B0	384-14602-3121B0	HDD 2.5"Tray SFF Tool-Less Black/Yellow
HDD Tray	383-30000-0154A0	383-30000-0154A0	HDD 2.5"Tray SFF Tool-Less Black/Yellow
PSU Bracket	32H1080001101	32H1080001101	CRPS Module, 800W, Full Range, 80+(Platinum) R1CA2801A(62368), ACBEL
PSU Bracket	132-41200-0700A1	132-41200-0700A1	CRPS Module, 1200W, Full Range, 80+(Platinum) R1CA2122A(62368), ACBEL
PSU Bracket	132-10550-0701A0	132-10550-0701A0	Module,550W, Full Range, 80+(Platinum) ACTIVE PFC, R1CA2551B(62368), RM23712e007,REV.A0, ACBEL
PSU Bracket	383-30000-0154A0	132-10400-0700A3	Single, Flex, 400W (Gold), ACBEL FSE001-7HAG
PSU Bracket	132-10500-0700A0	132-10500-0700A0	Single, Flex, 500W (Gold), ACBEL FSD059-7HCG
PSU Bracket	132-20350-1201D0	132-20350-1201D0	1+1 Redundant, 80+ (Silver), YH5401-1RA14R,3Y
PSU Bracket	132-30000-0024A0	132-30000-0024A0	1+1 Redundant, 1U Slim, 450W (Gold) YVICO450AH-5A18P20,3Y
PSU Bracket	132-20550-0503A0	132-20550-0503A0	CRPS, 550W (Platinum), FSP
PSU Bracket	132-20000-0007A0	132-20000-0007A0	PSU, CRPS, 800W (Titanium), R1CA2801C, ACBEL
PSU Bracket	132-30000-0017A0	132-30000-0017A0	Single, P24:550mm, P8:550mm, 500W, Full Range 80+ (Gold), Active PFC, RM24100e10, FSD059-4QCC


Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
PSU Bracket	132-40650-0700A2	132-40650-0700A2	Full Range, 80+ (Platinum), Active PFC, R1BA2651B-P (FSD057-00BC)(62368), RM13604e08, REV.A2
Rail & CMA	384-15103-3301A0	384-15103-3301A0	w/CMA Support: P2P 24.5"-36", Traveling Distance 32.3", Max Weight 31KG, 3 Sections, Tool-less
Rail & CMA	384-14303-3102A0	384-14303-3102A0	Travel: 292.4MM, 238.5MM, Screw, Bulk, REV.A, Simple Rail Long, 8BOX/16CTN/Pallet, Friction Rail
Rail & CMA	384-14303-3103A0	384-14303-3103A0	Travel: 292.4MM, 238.5MM, Screw, Bulk, REV.A, Simple Rail Short, 8BOX/16CTN/Pallet, Friction Rail
Rail & CMA	384-23703-3300A0	384-23703-3300A0	Cable Management Arm, 2AA7-364FAZOSH, w/Screw Packing+Manual+Box [MOQ]30]
Rail & CMA	384-23803-3300D0	384-23803-3300D0	32.8", P2P:26.3" to 36.9", Traveling Distance 30.7", Loading Weight 30.8 Kg, Tool-less
Rail & CMA	384-25203-3301A0	384-25203-3301A0	w/o CMA support - P2P: 26" to 33", Traveling Distance: 19", Max weight 21KG, 2-Sections, Tool-less
Rail & CMA	384-RAL000005SA0	384-RAL000005SA0	Slide Rail kit with CMA Support (only for RM25324)
Rail & CMA	384-RAL00001BA0	384-RAL00001BA0	Travel: 724.4MM, w/438MM, Tool-less, Bulk, REV.A
Rail & CMA	384-RAL00015SOA0	384-RAL00015SOA0	Travel: 560MM, w/438MM, Tool-less, Martas, Single
Rail & CMA	84H024010-012	84H024010-012	4U, Travel: 805MM, W:438MM, Non Tool-less, AP60-880 CMA, w/Mounting Plate*4+Screw
Rail & CMA	84H314610-003	84H314610-003	Travel: 560MM, W:438MM, Tool-less, 3A02-599BPZZ1AF, w/Screw
Rail & CMA	84H323610-034	84H323610-034	26", P2P:22.1" to 35.8", Traveling Distance 27.5", Loading Weight 45.0 Kg, Tool-less
Rail & CMA	84H314610-023	84H341300-002	20", P2P:23.6" to 34.1", Traveling Distance 27.7", Loading Weight 27.0 Kg, Non Tool-less
Rail & CMA	84H341300-002	84H341810-046	27", P2P:28" to 36", Traveling Distance 29", Loading Weight 75 Kg, Tool-less
Rail & CMA	84H341810-046	84H342310-001	20" Slide Rail, Ball Bearing
Rail & CMA	84H342310-001	84H349010-006	Cable Management arm (CMA)
Riser Card & Kits	84H349010-006	84H314610-023	AS'Y Component, RM14604, Riser Card, w/Bracket, 96PCS/CTN, PCIE X16
Riser Card & Kits	384-PCB00066B0A0	384-PCB00066B0A0	Riser Module, PCIE X16 Slot
Riser Card & Kits	384-PCB000019BA0	384-PCB000019BA0	KIT, RM25206, (62368), w/Rear Window/Riser Card X16, 12PCS/CTN
Riser Card & Kits	84H314310-005	84H314310-005	PCI-E 8X w/Bracket, RM145/RM14300
Riser Card & Kits	84H314310-006	84H314310-006	RM14300, for PCIE X16 w/Bracket
Riser Card & Kits	80H09323701A2	80H09323701A2	TWOX16&ONEX8, w/Anti-Staticbag
Riser Card & Kits	383-30000-3638A0	383-30000-3638A0	RM13310, Riser BKT w/Riser Board (Gen4)
Riser Card & Kits	384-23812-3102A0	384-23812-3102A0	Rear Window (FH), Riser BKT+Screw Type, 3-Slot
Riser Card & Kits	84H323610-006	84H323610-006	Rear Window, STD RW with 3-Full Height PCI
Storage Kit	384-FAN00296SOA0	384-FAN00296SOA0	Liquid Cooling Module, Alphacool, 120x120 (2700RPM)
Storage Kit	384-10501-2102A0	384-10501-2102A0	SR105/SR209, External 4-bay HDD Cage, 4x3.5", 4pcs/CTN (12G-SAS/SATA), 1x8025(4500RPM), Tool-less Tray
Storage Kit	384-23801-3103A0	384-23801-3103A0	2.5" 2-bay Cage, Hot-swap, w/2-port NVME Backplane and Mylar Air Duct, Note 4 fan need
Storage Kit	384-MIX000132BA0	384-MIX000132BA0	2-Bay 2.5" NVMe Gen 3 HDD Hot Swap Upgrade Kit (w/OcuLink cable)

Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
Storage Kit	384-PCB00057B0A0	384-PCB00057B0A0	External 2x2.5"(12G-SAS) (For RM41824 CRPS SKU) (42PCS/12CTN/Pallet)
Storage Kit	SK41202	SK41202H01*10881	Storage Kit, 1x5.25" to 1x3.5" (Internal) and Slim ODD
Storage Kit	SK41203	SK41203H01*11225	Storage Kit, 1x3.5" to 2x2.5" (Internal)
Storage Kit	SK51102T3	SK51102H01*14620	External Slim ODD to 1x2.5" (12G-SAS)
Storage Kit	384-10501-2101A0	384-10501-2101A0	SR105/SR209, External 4-bay HDD Cage, 4x3.5", 4pcs/CTN (12G-MiniSAS), 1x8025 (4500RPM), Tool-less Tray
Storage Kit	384-10701-2100A0	384-10701-2100A0	SR107, External 4-bay HDD Cage, 4x3.5" (12G-MiniSAS), Tool-less Tray, 4pcs/CTN
Storage Kit	384-10701-2101A0	384-10701-2101A0	New Cage, 3.5" HDD, Internal, w/Anti-vibration Rubber
Storage Kit	384-23701-3116B0	384-23701-3116B0	2-bay 2.5" HDD Cage, w/12Gbps SAS&SATA Backplane 2x650mm SATAIII Cable
Storage Kit	384-MIX000098SA0	384-MIX000098SA0	2-Bay 2.5" SSD H/S upgrade Kit (w/ HDD tray & cable) for RM352
Storage Kit	384-MIX00411B0A0	384-MIX00411B0A0	Internal 4-bay 3.5" HDD Cage, 1x8025 (4500RPM), 6pcs/CTN
Storage Kit	384-PCB00034B0A0	384-PCB00034B0A0	External 2x5.25" to 8x2.5"(NVMe3-8G),8pcs/CTN
Storage Kit	384-PCB00046B0A0	384-PCB00046B0A0	External 4-bay HDD Cage, 4x3.5" (12G-MiniSAS), 1x8025 (4500RPM), Tool-less Tray, 6pcs/CTN
Storage Kit	84H342310-003	84H342310-003	Drive Cage, 3x 5.25"+1x3.5", Black
Storage Kit	SK31101T3	SK31101H04*13897	Storage Kit, 1x5.25" to 1x3.5" Kit (12G-SAS/SATA)
Storage Kit	SK32303T3	SK32303H06*13651	Storage Kit, 2x5.25" to 3x3.5" (12G-SAS/SATA), 1x6025 (4200RPM)
Storage Kit	SK32801M3	SK32801H01*15188	Storage Kit, 2x5.25" to 8x2.5" (12G-MiniSAS), 1x6025 (7000RPM), 8pcs/CTN
Storage Kit	SK33502T3	SK33502H08*13709	Storage Kit, 3x5.25" to 5x3.5" (12G-SAS), 1x8032 (5000RPM), 1xUSB3.0
Storage Kit	SK41101-BK-H	SK41101H01*10879	Storage Kit, 1x5.25" to 1x3.5" (Internal) Kit
Storage Kit	SK51201T3	SK51201H01*14555	External 1x3.5" to 2x2.5" (12G-SAS)
Storage Kit	SK62801-0020A0	SK62801-0020A0	2x5.25" to 8x2.5" (4T4S,8G-NVMe+12G-SAS/SATA), 1x8038(11000RPM), 8pcs/CTN
Storage Kit	SK62801-0030A0	SK62801-0030A0	2x5.25" to 8x2.5" (32G-NVMe), 1x8038 (11000RPM), 8pcs/CTN
Storage Kit	84H314310-008	84H314310-008	RM14300,1x3.5" to 1x2.5"(Internal) HDD
Storage Kit	384-23702-3100A0	384-23702-3100A0	SK,2.5SDRIVE BAY 2-DRIVE ,NVME,REAR
Storage Kit	384-PCB00033B0A0	384-PCB00033B0A0	SR113 Option Part: Tri-mode 4+8 Gen3 2.5" HDD Cage BP, Bulk, 2X5.25", Tool-Less, N4, w/o Fan
Storage Kit	384-PCB00053B0A0	384-PCB00053B0A0	OS Drive, 2-Bay NVMe Gen4

PRODUCT DESCRIPTION

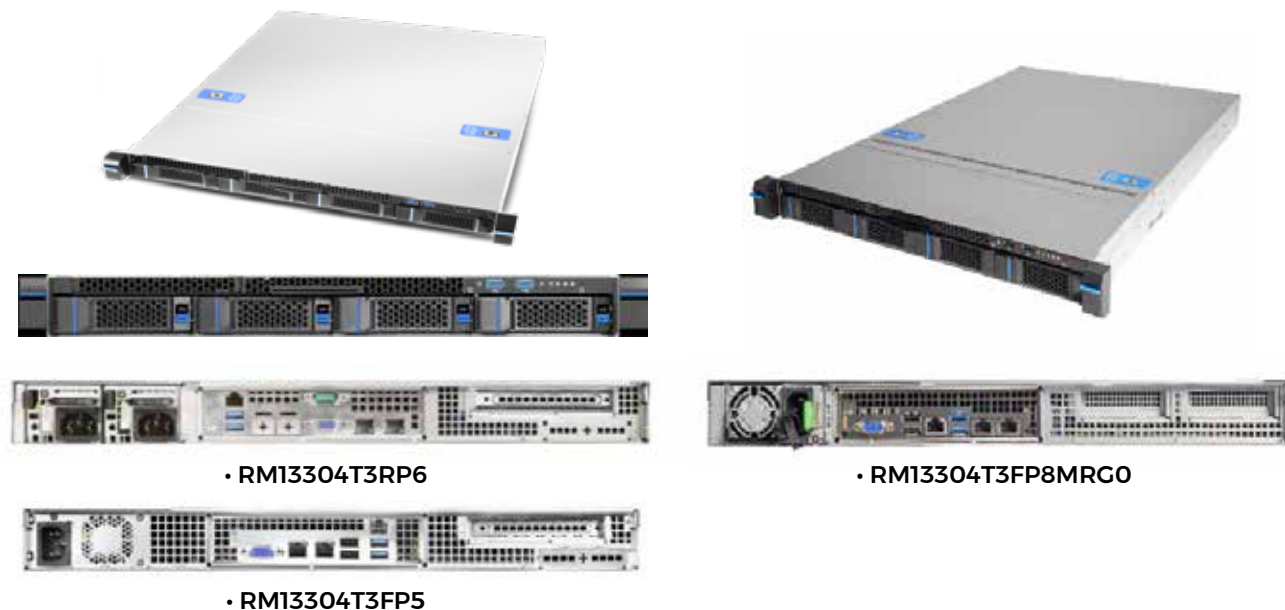

Order Code: **RM13304T3FP5 (RM13304H01*14530)**

- Includes:
- 1 x Cabinet Mounting Handle, 2pcs/set
 - 4 x 3.5" HDD Tray, Tool-Less
 - 1 x 4-port 12Gb/s SATA & SAS Backplane, For 3.5" HDD
 - 4 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 - 1 x PSU, 500W, Single, w/bracket
 - 1 x LED Board
 - 1 x Cable, Display, 900mm, Discrete Pins
 - 1 x Cable, Display, 900mm, for Supermicro Motherboard, (Accessory)
 - 1 x Cable, USB 3.0, 750mm
 - 1 x Dummy Cover for Slim ODD Bay
 - 1 x Dummy Cover for PCI-e Slot Opening (w/o Riser Bracket)
 - 2 x 2.5" HDD Holder, Blue
 - Single Packing Carton, w/ Chenbro Logo

Order code: **RM13304T3RP6 (RM13304H01*14529) (to be replaced by RM13304-0040A0 after stock depleted)**

- Includes:
- 1 x Cabinet Mounting Handle, 2pcs/set
 - 4 x 3.5" HDD Tray, Tool-Less
 - 1 x 4-port 12Gb/s SATA & SAS Backplane, For 3.5" HDD
 - 4 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 - 1 x PSU, 650W, 1+1 Redundant, w/bracket
 - 1 x LED Board
 - 1 x Cable, Display, for Supermicro M/B, 900mm (Accessory)
 - 1 x Cable, Display, 900mm, Discrete Pins
 - 1 x Cable, USB 3.0, 750mm
 - 1 x Dummy Cover for Slim ODD Bay
 - 1 x Dummy Cover for PCI-e Slot Opening (w/o Riser Bracket)
 - 2 x 2.5" HDD Holder, Blue
 - Single Packing Carton, w/Chenbro Logo

PRODUCT DESCRIPTION**Order code: RM13304T3FP8MR (RM1330402-01*907980)**

- Includes:**
1. 1 x Cabinet Mounting Handle, 2pcs/set
 2. 4 x 3.5" HDD Tray, Tool-Less
 3. 1 x 4-port 12Gb/s SATA & SAS Backplane, For 3.5" HDD
 4. 6 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 5. 1 x PSU, 800W, Single, w/ bracket
 6. 1 x LED Board
 7. 1 x Cable, Display, 900mm, Discrete Pins
 8. 1 x Cable, Display, 900mm, for Supermicro Motherboard (Accessory)
 9. 1 x Cable, USB 3.0, 750mm
 10. 1 x Dummy Cover for Slim ODD Bay
 11. 2 x Riser Card (Gen x16)
 12. 2 x 2.5" HDD Holder, Blue
 13. Single Packing Carton, w/ Chenbro Logo

Order code: RM13304-0050A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: EATX, up to 12" x 13"
 3. Dimensions (D x W x H): 660 x 438.5 x 43.5 (mm) / 25.89" x 17.26" x 1.71"
 4. Front Panel Control: 1 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 4 bays, 3.5" hot-swap toolless HDD (2.5" screw-in), 2 bays, 2.5" internal HDD, 1 bay, slim ODD, 9.5mm
 7. Fans: 40*40*28, 2300RPM, PWM, L180MM, 4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: 1U Flex/500 watts/80+ gold/150mm x 81.5mm x 40mm
 9. Power Input Voltage: 90~132VAC & 180~264VAC @ 47~63Hz
 10. PSU Safety Certifications: UL, TUV, CE/EMC, CCC, BSMI, C-tick
 11. Expansion Slots: 1 x full height riser bracket w/ dummy @ PCIe slot 6
 12. Cargo Box/Pallet Capacity: L5 package, with Chenbro logo / 10 pcs per pallet
 13. Back Plane/Single Conn/I2C/Power Conn:
4-bay tri-mode, SAS/SATA/NVMV Gen4/1 x miniSAS port & 4 x slimSAS port/4-pin I2C/2 x 4-pin 12v

Order code: RM13304-0060A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: EATX, up to 12" x 13"
 3. Dimensions (D x W x H): 660 x 438.5 x 43.5 (mm) / 25.89" x 17.26" x 1.71"
 4. Front Panel Control: 1 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 4 bays, 3.5" hot-swap toolless HDD (2.5" screw-in), 2 bays, 2.5" internal HDD, 1 bay, slim ODD, 9.5mm
 7. Fans: 40*40*56, Dual Motor, 22500/20500RPM, PWM, 180MM, 4P7C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: 1U redundant/650 watts/80+ Platinum/355 x 106 x 41.5mm
 9. Power Input Voltage: 90~132VAC & 180~264VAC @ 47~63Hz H V DC (240), 180~300 V DC
 10. PSU Safety Certifications: UL, TUV, IEC60950-1, CB, CE, GB4943-2011, BSMI, KCC
 11. Expansion Slot: 1 x full height riser bracket w/ dummy @ PCIe slot 6
 12. Cargo Box/Pallet Capacity: L5 package, with Chenbro Logo / 10 pcs per pallet
 13. Backplane/Single Conn/I2C/Power Conn:
4-bay Tri-Mode, SAS/SATA/NVMV Gen4/1 x MiniSAS port & 4 x slimSAS port/ 4-Pin I2C/ 2 x 4-Pin 12v

PRODUCT DESCRIPTION**Order code: RM1330403-0010A0 (MIO)**

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: Only supports Intel M20NTPSB (12 x 13.1"), Tyan S7126 (12 x 13"), or Tyan S8036 (12 x 13")
 3. Dimensions (D x W x H): 660mm x 438.5mm x 43.4mm/26" x 17.6" x 1.7"
 4. Front Panel Control: 2 x USB 3.0, 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1 x HDD status
 5. Ear Bracket: Metal ear bracket
 6. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD, 2 x 2.5" HDD & 1 x slim ODD
 7. Backplane/Single Conn/I2C/Power Conn: 4-bay SAS/SATA, 4 x SATA ports/5-pin I2C/2 x 4-pin ATX Molex
 8. Fans: 6 x fans, 40*40*28, 23000 RPM, PWM, L 200mm (OUT fan), 4P4C, single, ball, PF40281BX-D088-S99, SUNON
 9. PSU Form Factor/Wattage / Efficiency Rating / Dimensions: 1U slim, 750w/80+ Platinum/L 300 * W 50.5 * H 40mm
 10. Power Input Voltage: 100~240 V AC @ 50-60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE, IEC, GB, KCC, BSMI
 12. Expansion Slots: Dual riser using butterfly bracket
 13. Cargo Box / Pallet Capacity:
L5 package, L 840 * W 595 * H 170mm, 22kg F/CM2, single, w/Chenbro logo, 10 pcs per pallet

Order code: RM1330403-0020A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: Only supports Intel M20NTPSB (12" x 13.1"), Tyan S7126 (12" x 13"), or Tyan S8036 (12" x 13")
 3. Dimensions (D x W x H): 660mm x 438.5mm x 43.4mm/ 26" x 17.6" x 1.7"
 4. Front Panel Control: 2 x USB 3.0, 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1 x HDD status
 5. Ear Bracket: Metal ear bracket
 6. Drive Bays: 4-bay, 3.5" tri-mode hot-swap toolless HDD, 2 x 2.5" HDD & 1 x slim ODD
 7. Fans: 6 x fan, 40*40*28, 23000 RPM, PWM, L200 mm (OUT fan), 4P4C, single, ball, PF40281BX-D088-S99, SUNON
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: 1U slim, 750 watts/80+ Platinum/L 300 * W 50.5 * H 40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certifications: UL, TUV, CB, CE, IEC, GB, KCC, BSMI
 11. Expansion Slots: Dual riser by butterfly bracket
 12. Cargo Box/Pallet Capacity: L5 package, L 840 * W 595 * H 170mm, 22KG F/CM2, single, w/ Chenbro logo, 10 pcs per pallet
 13. Backplane/Single Conn/I2C/Power Conn:
4-bay tri-mode, SAS/SATA/NVMV Gen4/1 x miniSAS port & 4 x slimSAS 4i port/4-pin I2C/2 x 4-pin 12V

PRODUCT DESCRIPTION



Order code: RM13310M3RP6 (RM13310H01*14528) replaced by RM13310-0070AO

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: EATX , up to 12" x 13"
 3. Dimensions (D x W x H): 660 x 438.5 x 43.5 (mm)/25.89" x 17.26" x 1.71"
 4. Front Panel Control: 1 x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 10-bay, 2.5" hot-swap toolless HDD
 7. Backplane/Single Conn/I2C/Power Conn: 10-bay, miniSAS/3 x miniSAS port/5-pin I2C/1 x 4-pin 12v
 8. Fans: 40 * 40 * 28, 2300 RPM, PWM, L 180mm, 4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: 1U redundant/650 watts/80+ Platinum/355 x 106 x 41.5mm
 10. Power Input Voltage: 90~132VAC & 180~264VAC @ 47~63Hz H V DC (240), 180~300 V DC
 11. PSU Safety Certifications: UL, TUV, IEC60950-1, CB, CE, GB4943-2011, BSMI, KCC
 12. Expansion Slots: 1 x full height riser bracket w/ dummy at PCIe slot 6
 13. Cargo Box/Pallet Capacity: L5 package, with Chenbro logo/10pcs per pallet

Order code: RM13310-0060AO

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: EATX , up to 12" x 13"
 3. Dimensions (D x W x H): 660 x 438.5 x 43.5 (mm) / 25.89" x 17.26" x 1.71"
 4. Front Panel Control: 1x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 10-bay, 2.5" hot-swap toolless HDD
 7. Backplane/Single Conn/I2C/Power Conn: 10-bay, miniSAS/3 x miniSAS port/5-pin I2C/1 x 4-Pin 12v
 8. Fans: 40*40*56, dual motor, 22500/20500 RPM, PWM, 180mm, 4P7C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: 1U Flex, 500W/80+ Gold/150mm x 81.5mm x 40mm
 10. Power Input Voltage: 90~132VAC & 180~264VAC @ 47~63Hz
 11. PSU Safety Certification: UL, TUV, CE/EMC, CCC, BSMI, C-tick
 12. Expansion Slots: 1 x full height riser bracket w dummy at PCIe slot 6
 13. Cargo Box/Pallet Capacity: L5 package, with Chenbro logo/10pcs per pallet

PRODUCT DESCRIPTION



• RM14300S1FP2



• RM14300FP2 Inside



• RM14302T3FP5SR (RIO)



• RM14302T3FP5SRU1 (FIO)



Order code: **RM14300S1FP2 (RM14300H04*14913)**

- Includes:
- 1 x LED board
 - 1 x display cable, 800mm
 - 1 x internal toolless HDD holder(1 x 3.5" HDD + 1 x 2.5" HDD)
 - 1 x toolless top cover
 - 1 x USB 3.0 cable, 2-port, 750mm, w/mounting bracket
 - 3 x 40mm fan(NMB), T28, PWM, ball bearing, L150mm
 - 1 x L-shaped rack mounting bracket, w/thumb screw, 2 pcs/set
 - 1 x single packing carton, w/Chenbro logo
 - PSU, 200W, full range

Order code: **RM14302T3FP5SR (RIO) (RM1430201-01*912659)**

- Includes:
- Support update to ATX, 1 x LED board, 1x rear I/O
 - 1 x display cable
 - 2 x hotswap toolless HDD (2 x 2.5" HDD)
 - 1 x toolless top cover
 - 1 x USB 3.0 cable, 2-port
 - 4 x 40mm fixed fan, dual rotor 22500/20500
 - 1 x PCIe x16 riser card, supports full height & half length
 - 1 x single packing carton, w/Chenbro logo
 - PSU, 500W, full range

Order code: **RM14302T3FP5SRU1 (FIO) (RM1430201-02*912657)**

- Includes:
- Support update to ATX, 1 x LED board, 1x FIO I/O
 - 1 x display cable
 - 2 x hot-swap toolless HDD (2 x 2.5" HDD)
 - 1 x toolless Top cover
 - 1 x USB 3.0 cable, 2-port
 - 4 x 40mm Fix fan, Dual rotor 22500/20500
 - 1 x PCIe x16 riser card, support Full Height & Half Length
 - 1 x single packing carton, w/Chenbro logo
 - PSU, 500W, Full Range

PRODUCT DESCRIPTION



• RM14604T3FP4



• RM14604T3-R350+



Order code: **RM14604T3FP4+ (RM14604-0040B0)**

- Includes:
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5mm / 21.46" x 17.27" x 1.72"
 4. Ear Bracket: Captive ear bracket
 5. Drive Bays: 4-bay 3.5" hot-swap toolless HDD (2.5" screw-in); 2-bay 2.5" internal HDD; 1-bay slim ODD 9.5mm
 6. Backplane/Single Conn/I2C/Power Conn: 4-bay 12 Gb/s SAS/SATA; 4 x SATA signal / 5-pin I2C/1 x big 4-pin 12v/5v
 7. Fans: 4 x fans, 40*40*56, dual motor, 22500/20500 RPM, PWM, 180mm, 4P7C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: 1U Flex, 400w / 80+ Gold/165 x 82 x 40.5mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certifications: UL, TUV, IEC/CB, CE, FCC, CCC, BSMI
 11. Expansion Slots: 1 x full height riser bracket w/ dummy @ PCIe slot 6
 12. Cargo Box/Pallet Capacity: L5 package, 26" x 22.5" x 5.5", with Chenbro logo / 28pcs per pallet
 13. Front Panel Controls:
1 x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604+ only)

Order code: **RM14604-0170A0**

- Includes:
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5mm / 21.46" x 17.27" x 1.72"
 4. Ear Bracket: Captive ear bracket
 5. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in), 2-bay, 2.5" internal HDD, 1-bay, slim ODD, 9.5mm
 6. Backplane; Single Conn; I2C; Power Conn: 4-bay 12Gb/s SAS/SATA; 4 x SATA signal; 4-pin I2C; 1 x 4-pin 12v/5v
 7. Fans: 3 x fans, 40*40*56, dual motor, 22500/20500 RPM, PWM, 180mm, 4P7C (up to 4pcs)
 8. PSU Form Factor; Wattage; Efficiency Rating: 1U Flex; 500w; 150mm x 81.5mm x 40mm; 80+ Gold
 9. Power Input Voltage: 90~132VAC & 180~264VAC @ 47~63Hz
 10. PSU Safety Certifications: UL, TUV, CE/EMC, CCC, BSMI, C-tick
 11. Expansion Slots: 1 x full height riser bracket w/ dummy @ PCIe slot 6
 12. Optional: Gen4 x16 riser card, front bezel, slide rail
 13. Cargo Box; Pallet Capacity: L5 package, 26" x 22.5" x 5.5", with Chenbro logo; 28pcs per pallet
 14. Front Panel Controls:
1 x USB 3.0, 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604+ only)

PRODUCT DESCRIPTION

Order code: RM14604T3-R350+ (RM14604-0100C0) Will be replace by RM14604-0180A0 after stock is depleted.

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
 4. Ear Bracket: Captive ear bracket
 5. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" screw-in); 2-bay, 2.5" internal HDD; 1-bay, slim ODD, 9.5mm
 6. Backplane; Single Conn; I2C; Power Conn: 4-bay 12Gb/s SAS/SATA; 4 x SATA signal; 5-pin I2C; 1 x big 4-pin 12v/5v
 7. Fans: 4 x fans, 40*40*56, dual motor, 22500/20500 RPM, PWM, 180mm, 4P7C
 8. PSU Form Factor; Wattage; Efficiency Rating; Dimensions: 1U redundant; 350w; 80+ Gold; 220 x 106 x 41.5mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE, O CCC, BSMI
 11. Expansion Slots: 1 x full height riser bracket w/ dummy @ PCIe slot 6
 12. Cargo Box/Pallet Capacity: L5 Package, 26" x 22.5" x 5.5", with Chenbro logo / 28 pcs per pallet
 13. Front Panel Controls:
1 x USB 3.0, 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604+ only)

Order code: RM14604-0180A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
 4. Ear Bracket: Captive ear bracket
 5. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in), 2-bay, 2.5" internal HDD, 1-bay, slim ODD, 9.5mm
 6. Backplane; Single Conn; I2C; Power Conn: 4-bay 12Gb/s SAS/SATA, 4 x SATA Signal / 5-Pin I2C/ 1 x Big 4-Pin 12v/5v
 7. Fans: 4 x fan, 40*40*56, Dual Motor, 22500/20500RPM,PWM,180MM,4P7C
 8. PSU Form Factor; Wattage; Efficiency Rating; Dimensions: 1U redundant,, 350w / 80+ Gold/220 x 106 x 41.5mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certifications: UL, TUV, CB, CE, O CCC, BSMI
 11. Expansion Slots: 1 x Full Height riser bracket w dummy @ PCIe Slot6
 12. Cargo Box/Pallet Capacity: L5 Package, 26" x 22.5" x 5.5", with Chenbro Logo / 28pcs per pallet
 13. Front Panel Control:
1 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604 Plus Only)

Order code: RM14604-0190A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
 4. Ear Bracket: Captive ear bracket
 5. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in), 2-bay, 2.5" internal HDD, 1-bay, slim ODD, 9.5mm
 6. Backplane; Single Conn; I2C; Power Conn: 4-bay 12Gb/s SAS/SATA, 4 x SATA Signal / 5-Pin I2C/ 1 x Big 4-Pin 12v/5v
 7. Fans: 4 x fan, 40*40*56, Dual Motor, 22500/20500RPM,PWM,180MM,4P7C
 8. PSU Form Factor; Wattage; Efficiency Rating; Dimensions: 1U redundant,, 450w / 80+ Gold/220 x 106 x 41.5mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE, O CCC, BSMI
 11. Expansion Slots: 1 x Full Height riser bracket w dummy @ PCIe Slot6
 12. Cargo Box/Pallet Capacity: L5 Package, 26" x 22.5" x 5.5", with Chenbro Logo / 28pcs per pallet
 13. Front Panel Control:
1 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604 Plus Only)

PRODUCT DESCRIPTION**Order code: RM14604-0160A0**

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
 4. Front Panel Control: 1x USB 3.0 / 1x power status, 2 x Lan activity, 1x UID, 1 x system alarm, 1x HDD status (RM14604 Plus Only)
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in), 2-bay, 2.5" internal HDD, 1-bay, slim ODD, 9.5mm
 7. Fans: 4 x fan, 40*40*56, Dual Motor, 22500/20500RPM,PWM,180MM,4P7C
 8. PSU Form Factor; Wattage; Efficiency Rating; Dimensions: 1U Flex, 500w/150mm x 81.5mm x 40mm / 80+ Gold
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, IEC/CB, CE, FCC, CCC, BSMI
 11. Expansion Slots: 1 x Full Height riser bracket w dummy @ PCIe Slot6
 12. Cargo Box/Pallet Capacity: L5 Package, 26" x 22.5" x 5.5", with Chenbro Logo / 28pcs per pallet
 13. Backplane; Single Conn; I2C; Power Conn:
4-bay Tri-Mode, SAS/SATA/NVMV Gen4/1 x MiniSAS & 4 x slimSAS single/ 4-Pin I2C/ 2 x 4-Pin 12v

Order code: RM14604-0200A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
 4. Front Panel Control: 1x USB 3.0 / 1x power status, 2 x Lan activity, 1x UID, 1 x system alarm, 1x HDD status (RM14604 Plus Only)
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in), 2-bay, 2.5" internal HDD, 1-bay, slim ODD, 9.5mm
 7. Fans: 4 x fan, 40*40*56, Dual Motor, 22500/20500RPM,PWM,180MM,4P7C
 8. PSU Form Factor; Wattage; Efficiency Rating; Dimensions: 1U Flex, 500w/ 80+ Gold/150mm x 81.5mm x 40mm
 9. Power Input Voltage: 90~132VAC & 180~264VAC @ 47~63Hz
 10. PSU Safety Certifications: UL, TUV, CE/EMC, CCC, BSMI, C-tick
 11. Expansion Slots: 1 x Full Height riser bracket w/ dummy @ PCIe Slot6
 12. Cargo Box/Pallet Capacity: L5 Package, 26" x 22.5" x 5.5", with Chenbro Logo / 28pcs per pallet
 13. Backplane; Single Conn; I2C; Power Conn:
4-bay Tri-Mode, SAS/SATA/NVMV Gen4/1 x MiniSAS & 4 x slimSAS single/ 4-Pin I2C/ 2 x 4-Pin 12v

Order code: RM14604-0210A0

- Includes:**
1. Rack Height: 1U
 2. Motherboard Form Factor: ATX , 12" x 9.6"
 3. Dimensions (D x W x H): 545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
 4. Front Panel Control: 1x USB 3.0 / 1x power status, 2 x Lan activity, 1x UID, 1 x system alarm, 1x HDD status (RM14604 Plus Only)
 5. Ear Bracket: Captive ear bracket
 6. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in), 2-bay, 2.5" internal HDD, 1-bay, slim ODD, 9.5mm
 7. Fans: 4 x fan, 40*40*56, Dual Motor, 22500/20500RPM,PWM,180MM,4P7C
 8. PSU Form Factor; Wattage; Efficiency Rating; Dimensions: 1U redundant,, 450w / 80+ Gold/220 x 106 x 41.5mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE, CCC, BSMI
 11. Expansion Slots: 1 x Full Height riser bracket w dummy @ PCIe Slot6
 12. Cargo Box/Pallet Capacity: L5 Package, 26" x 22.5" x 5.5", with Chenbro Logo / 28pcs per pallet
 13. Backplane; Single Conn; I2C; Power Conn:
4-bay Tri-Mode, SAS/SATA/NVMV Gen4/1 x MiniSAS & 4 x slimSAS single/ 4-Pin I2C/ 2 x 4-Pin 12v

PRODUCT DESCRIPTION



Model	RM14610-0010A0
Rack Height	1U
Motherboard Form Factor	ATX , 12" x 9.6"
Dimensions (D x W x H)	545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
Front Panel Controls	1 x USB 3.0, 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604+ only)
Ear Bracket	Captive ear bracket
Drive Bays	10-bay, 2.5" hot-swap toolless HDD
Backplane	10-bay, miniSAS
Single Conn	3 x miniSAS single
I2C	5-pin I2C
Power Conn	1 x 4-pin 12v
Fans	40*40*56, dual motor, 22500/20500 RPM, PWM, 180mm, 4P7C
PSU Form Factor	1U Flex
Wattage	500w
Efficiency Rating	80+ Gold
PSU Dimensions	150mm x 81.5mm x 40mm
Power Input Voltage	100~240VAC @ 50~60Hz
PSU Safety Certifications	UL, TUV, IEC/CB, CE, FCC, CCC, BSMI
Expansion Slots	1 x full height riser bracket w/ dummy at PCIe slot 6
Cargo Box/Pallet Capacity	L5 package, 26" x 22.5" x 5.5", with Chenbro logo / 28 pcs per pallet

RM14610

Model	RM14610-0020AO
Rack Height	1U
Motherboard Form Factor	ATX , 12" x 9.6"
Dimensions (D x W x H)	545 x 438.5 x 43.5 (mm) / 21.46" x 17.27" x 1.72"
Front Panel Controls	1 x USB 3.0, 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status (RM14604+ only)
Ear Bracket	Captive ear bracket
Drive Bays	10-bay, 2.5" hot-swap toolless HDD
Backplane	10-bay, miniSAS
Single Conn	3 x miniSAS single
I2C	5-pin I2C
Power Conn	1 x 4-pin 12v
Fans	40*40*56, dual motor, 22500/20500 RPM, PWM, 180mm, 4P7C
PSU Form Factor	1U redundant
Wattage	450w
Efficiency Rating	80+ Gold
PSU Dimensions	220mm x 106mm x 41.5mm
Power Input Voltage	100~240VAC @ 50~60Hz
PSU Safety Certifications	UL, TUV, IEC/CB, CE, FCC, CCC, BSMI
Expansion Slots	1 x full height riser bracket w/ dummy at PCIe slot 6
Cargo Box/Pallet Capacity	L5 package, 26" x 22.5" x 5.5", with Chenbro logo / 28 pcs per pallet

PRODUCT DESCRIPTION**Order code: *RM23804T3RP5 (RM23804H01*15507)***

- Includes:**
1. 2 x 5.25" Open Bay Support
 2. 1 x 4-port 12Gb/s Mini-SAS HD Backplane, Passive
 3. 1 x LED Board, w/ USB 3.0
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P(SS1) to 10P*2 (Female), 500mm, For Supermicro M/B
 6. 1 x Fan Bar, Middle, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing
 8. 2 x Fan Cover, For Air flow Management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 1 x LP Window for Single 2U PSU
 15. PSU, 1+1 Redundant, 550W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: *RM23804-0020A0*

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87mm/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic rack ear
 6. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD, 2x 5 ¼" bay
 7. Backplane: Single Conn; I2C; Power Conn: 4-bay SAS/SATA; 4x SATA ports; 5-pin I2C; 2 x 4-pin ATX molex
 8. Fans: 3x fan (80*T38, NIDEC), hot-swap, 11000 RPM, PWM, L70mm, 4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS, 800W / 80+ platinum/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE, O CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM, 22 KGF/cm2, AB FLUTE, for printing carton (CHENBRO CIS)/10 pcs per pallet

PRODUCT DESCRIPTION**Order code: RM23804-0030A0**

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87mm/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic rack ear
 6. Drive Bays: 4-bay, 3.5" tri-mode hotswappable toolless HDD, 2x 5 ¼" bay
 7. Fans: 3x fan (80*T38, NIDEC), hot-swappable, 11000 RPM, PWM, L70mm, 4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 550w / 80+ Platinum/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE, O CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 package, 830*590*190mm, 22KGF
 13. Pallet Capacity: CM2, AB FLUTE, for printing carton (CHENBRO CIS)/10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
4-bay tri-mode, SAS/SATA/NVMV Gen4/1 x miniSAS port & 4 x slimSAS 4i port/ 4-pin I2C/ 2 x 4-pin 12v

Order code: RM23804-0040A0

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic rack ear
 6. Drive Bays: 4-bay, 3.5" tri-mode hot-swap toolless HDD, 2x 5 ¼" bay
 7. Fans: 3x fans (80*T38, NIDEC), hot-swap, 11000 RPM, PWM, L70mm, 4 P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS, 800W/80+ Titanium/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE, O CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 package, 830*590*190mm, 22KGF
 13. Pallet Capacity: CM2, AB FLUTE, for printing carton (CHENBRO CIS)/10 pcs per Pallet
 14. Back Plane/Single Conn/I2C/Power Conn:
4-bay tri-mode, SAS/SATA/NVMV Gen4/1 x miniSAS port & 4 x slimSAS 4i port/4-pin I2C/ 2 x 4-pin 12v

PRODUCT DESCRIPTION



• RM23808M3FP7U1



• RM23808M3RP8U5



Order code: *RM23808M3RP8U5 (RM23808H03*15127)*

- Includes:**
1. 8 X 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro M/B)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ Fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 1 x Fan Dummy Cover, For Air Flow Management
 10. 1 x Low Profile Rear Window, 7-slot
 11. 1 x Dummy Cover, For Rear 2-bay 2.5" HDD Cage Opening
 12. 1+1 CRPS, 800W, Full Range, 80+ Platinum, w/ Mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ Easy-lift Latch
 15. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: *RM23808M3RPCC1 (RM23808H03*15778)* Will be phased out after stock depleted.

- Includes:**
1. 8x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro M/B)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ Fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 3 x Full Height Rear Window
 10. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 11. 1 x (1+1) CRPS, 1200W, Full Range, w/ mounting Bracket
 12. 1 x Top Cover, Front, Tool-less
 13. 1 x Top Cover, Rear, w/ Easy-lift Latch
 14. 1x Riser card X 16
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION**Order code: RM23808-0090A0**

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87mm/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic rack ear
 6. Drive Bays: 8-bay, 3.5" hot-swap toolless HDD, 1x slim ODD, 2x 2.5" internal drive
 7. Backplane/Single Conn/I2C/Power Conn: 8-bay SAS/SATA, 2x mini-SAS ports / 4-pin I2C/1 x 8-pin 12V
 8. Fans: 3x fan (80*T38, NIDEC), hot-swap, 11000 RPM, PWM, L70mm, 4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS, 800W / 80+ Titanium /L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE, O CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 package, 830*590*190mm, 22KGF/CM2, AB FLUTE, for printing carton (CHENBRO CIS)/ 10 pcs per pallet

Order code: RM23808-0130A0

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 8-bay, 3.5" hot-swap toolless HDD, 1x slim ODD, 2x 2.5" internal drive
 7. Backplane/Single Conn/I2C/Power Conn: 8-bay SAS/SATA, 2x mini-SAS ports / 4-Pin I2C/1 x 8-Pin 12V
 8. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE,O CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)/ 10 pcs per Pallet


PRODUCT DESCRIPTION



• RM23812E3RP8



• RM23812E3RPCMRG1

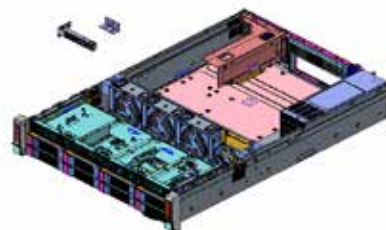

• RM23808M3RPCG1



Order code: **RM23812E3RP8 (RM23812H01*15457)**

- Includes:
1. 12 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 12-port 12Gb/s mini-SAS HD Expander Backplane, Active
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 1 x Fan Dummy Cover, For Air Flow Management
 10. 1 x Low Profile Rear Window (RM23808-103B), 7-slot
 11. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x (1+1) CRPS, 800W, Full Range, w/ mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ easy-lift Latch
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: **RM23812E3RP8(T) (RM23812-0120A0)**

- Includes:
1. 12 x 3.5" HDD tray, toolless, Black/blue
 2. 1 x 12-port 12Gb/s mini-SAS HD Expander backplane, Active
 3. 1 x Front LED & USB 3.0*2 board, Built-in cabinet ear
 4. 1 x Extension cable, display, 2*12P SSI to 10P*2 Female(for Supermicro motherboard)
 5. 1 x display&Switch cable, 2*12P to 10P*2, 500mm, discrete Pins
 6. 1 x fan Cage, 4-bay, for 4 x 80mm fan, w/4*PCBA for hot-swap, toolless
 7. 3 x 80mm fan, PWM, T38, ball bearing, L70mm, hot-swap, w/fan holder
 8. 4 x fan Extension cable, 500mm
 9. 1 x fan dummy cover, for Air Flow Management
 10. 1 x Low Profile Rear Window(RM23808-103B), 7-slot
 11. 1 x dummy cover, for Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x 1+1 800W CRPS 80+ Titanium
 13. 1 x Top cover, Front, toolless
 14. 1 x Top cover, Rear, w/Easy-lift Latch
 15. 1 Single packing carton, w/Chenbro logo, Pallet

PRODUCT DESCRIPTION

Order code: RM23812E3RPCMRG1 (RM2381201-01*909629) Will be phased out after stock is depleted.

- Includes:**
1. Mother Board Form Factor for AMD EPYC 7003/7002 SMC H12SSW-NTR
 2. 12 x 3.5" HDD Tray, Tool-less, Black/Blue
 3. 1 x 12-port 12Gb/s mini-SAS HD Expander Backplane, Active
 4. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 5. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 6. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 7. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 8. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 9. 4 x Fan Extension Cable, 500mm
 10. 4 x Full Height Rear Window+ 3 Low Profile Rear Window
 11. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x (1+1) CRPS, 1200W, Full Range, w/ mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ easy-lift Latch
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: RM23812-0210A0

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 12-bay, 3.5" hot-swap toolless HDD.
 7. Backplane/Single Conn/I2C/Power Conn: 12-bay SAS/SATA EXP, 2x mini-SAS ports / 4-Pin I2C/ 2 x 8-Pin 12V
 8. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)/10 pcs per Pallet

Order code: RM23812-0220A0

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 12-bay, 3.5" hot-swap toolless HDD.
 7. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 800w / 80+ Plantium/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 Package, 830*590*190MM,22KGF
 13. Pallet Capacity: L5 Package, 830*590*190MM,22KGF
 14. Backplane/Single Conn/I2C/Power Conn:
12-bay SAS/SATA/NVMe, 3x mini-SAS ports/4x slimline 8i ports/ 4-Pin I2C/ 2 x 8-Pin 12V

PRODUCT DESCRIPTION**Order code: RM23812-0230A0**

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 12-bay, 3.5" hot-swap toolless HDD.
 7. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 800w / 80+ Titanium/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)
 13. Pallet Capacity: 10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
12-bay SAS/SATA/NVMe, 3x mini-SAS ports/4x slimline 8i ports/ 4-Pin I2C/ 2 x 8-Pin 12V

Order code: RM23812-0240A0

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 12-bay, 3.5" hot-swap toolless HDD.
 7. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)
 13. Pallet Capacity: 10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
12-bay SAS/SATA/NVMe, 3x mini-SAS ports/4x slimline 8i ports/ 4-Pin I2C/ 2 x 8-Pin 12V

PRODUCT DESCRIPTION



• RM238N24-RL



• RM238N8T16-RL



• RM238N20T4-RL



• RM238N4T20-RL

Order code: **RM23824-0140AO**

- Includes:
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 16-bay, 2.5" hot-swap toolless HDD.
 7. Backplane/Single Conn/I2C/Power Conn: 16-bay SAS/SATA EXP, 2x mini-SAS ports / 4-Pin I2C/ 3 x 8-Pin 12V
 8. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)/10 pcs per Pallet

Order code: **RM23824-0150AO**

- Includes:
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 16-bay, 2.5" hot-swap toolless HDD.
 7. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)
 13. Pallet Capacity: 10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
8-bay SAS/SATA+ 8-bay NVMe G5, 2x mini-SAS ports /8x MCIO 4i ports/ 4-Pin I2C/ 2 x 8-Pin 12V

PRODUCT DESCRIPTION**Order code: RM23824-0160AO**

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 16-bay, 2.5" hot-swap toolless HDD.
 7. Backplane/Single Conn/I2C/Power Conn: 2x 8-bay NVMe G5, 16x MCIO 4i ports/ 4-Pin I2C/ 2 x 8-Pin 12V
 8. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)/10 pcs per Pallet

Order code: RM23824-0170AO

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 24-bay, 2.5" hot-swap toolless HDD.
 7. Backplane/Single Conn/I2C/Power Conn: 24-bay SAS/SATA EXP, 2x mini-SAS ports / 4-Pin I2C/ 4 x 8-Pin 12V
 8. Fans: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)/10 pcs per Pallet

Order code: RM23824-0180AO

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 24-bay, 2.5" hot-swap toolless HDD.
 7. Fan: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 11. Expansion Slots: 7 x low profile or 3 x full height (optional)
 12. Cargo Box: L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)
 13. Pallet Capacity: 10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
16-bay SAS/SATA EXP+ 1x 8-bay NVMe G5, 8x MCIO 4i ports/ 2x mini-SAS ports/4-Pin I2C/ 4 x 8-Pin 12V


PRODUCT DESCRIPTION**Order code: RM23824-0190AO**

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: E-ATX (12"x13")
 3. Dimensions (D x W x H): 658.2 x 438 x 87 (mm)/ 25.92" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 24-bay, 2.5" hot-swap toolless HDD.
 7. Backplane/Single Conn/I2C/Power Conn: 3x 8-bay NVMe G5, 24x MCIO 4i ports/ 4-Pin I2C/ x 8-Pin 12V
 8. Fan: 3x fan(80*T38,NIDEC),hot-swap, 11000RPM,PWM, L70MM,4P4C
 9. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 1200w / 80+ Plantium/L185*W73.5*H40mm
 10. Power Input Voltage: 100~240VAC @ 50~60Hz
 11. PSU Safety Certification: UL, TUV, CB, CE,0 CCC, BSMI
 12. Expansion Slots: 7 x low profile or 3 x full height (optional)
 13. Cargo Box/Pallet Capacity:
L5 Package, 830*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)/10 pcs per Pallet

Order code: RM238N4T20-RCOOL(RM23824-0060C0) Will be phased out after stock is depleted.

- Includes:**
1. 4 x 2.5" HDD tray, toolless, black or orange (for NVME drives)
 2. 20 x 2.5" HDD tray, toolless, black or blue
 3. 1 x 8-port 4/8 tri-mode NVME backplane, 12Gb/s
 4. 1 x 12Gb/s SAS expander, 24-port, daughter board
 5. 1 x 16-port 12Gb/s mini-SAS HD backplane, Passive, for 2.5" HDD/SSD
 6. 2 x mini-SAS HD cable, backplane to backplane, 550mm
 7. 1x cable, I2C, N4 BP to 16 bay SAS/SATA BP, 300mm
 8. 1x cable, I2C, SAS Expander to MB , 800mm
 9. 1 x Front LED & USB 3.0*2 board, Built-in cabinet ear
 10. 1 x Extension cable, display, 2*12P SSI to 10P*2 Female(for Supermicro motherboard)
 11. 1 x fan Cage, 4-bay, for 4 x 80mm fan, w/4*PCBA for hot-swap, toolless
 12. 4 x 80mm fan, PWM, T38, ball bearing, L70mm, hot-swap, w/fan holder
 13. 4 x fan Extension cable, 500mm
 14. 1 x Low Profile Rear Window
 15. 1 x dummy cover, for Rear 2-bay 2.5" HDD Cage Opening
 16. 1 x Top cover, Front, toolless
 17. 1 x Top cover, Rear, w/Easy-lift Latch
 18. 1 x PSU bracket, CRPS, Front and Rear
 19. 1 x single packing carton, w/Chenbro logo, Pallet
 20. PSU, CRPS, 1200W, hot-swap, with PDB, With PSU BKT

PRODUCT DESCRIPTION

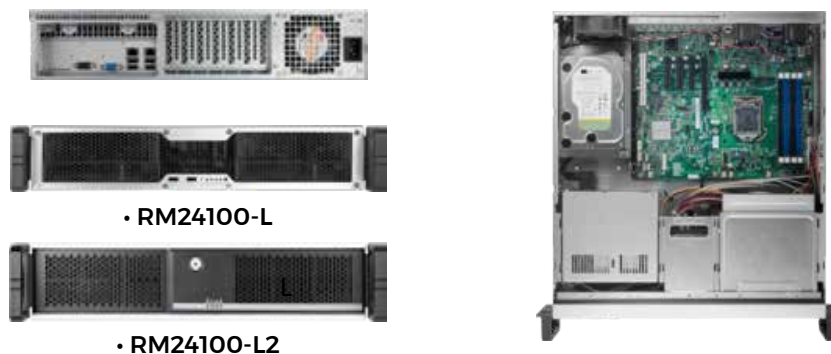

Order Code: RM24100-L (RM24100H01*15651)

- Includes:**
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x Aluminum Front Plate, Decoration Strip
 9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 10. 1 x Low Profile PCI Slots Rear Window
 11. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-L2 (RM24100H01*15650)

- Includes: 2-door Bezel**
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x 2-door Front Bezel, Black
 9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101), YS
 10. 1 x Low Profile PCI Slots Rear Window
 11. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-LU3 (RM24100-0110C0)

- Includes:**
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 9. 1 x Low Profile PCI Slots Rear Window
 10. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM24100-L2U3 (RM24100-0080C0)

Includes: 2-door Bezel

1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
2. 1 x Drive Cage, 2 x 3.5"
3. 1 x 2-bay 2.5" HDD Holder
4. 1 x Front Display and Control Switch Cable, 800mm
5. 1 x USB 3.0 Cable
6. 1 x Mounting Bracket, PS/2 PSU, Rear
7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
8. 1 x 2-Door Front Bezel, Black
9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101), YS
10. 1 x Low Profile PCI Slots Rear Window
11. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-S400L2U3 (RM24100-0120C0) Will be phased out after stock is depleted.

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x Aluminum Front Plate, Decoration Strip
 9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 10. 1 x Low Profile PCI Slots Rear Window
 11. 1 x 2-door Front Bezel, Black
 12. 1 x 400W Single PSU
 13. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-S600L2U3 (RM24100-0060C0)

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x Aluminum Front Plate, Decoration Strip
 9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 10. 1 x Low Profile PCI Slots Rear Window
 11. 1 x 2-door Front Bezel, Black
 12. 1x 600W Single PSU
 13. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100FP8 (RM24100-0170C0)

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5" or 1 x Slim ODD
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 7. 1 x Aluminum Front Plate, Decoration Strip
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 9. 1 x Low Profile PCI Slots Rear Window
 10. 1 x 800W CRPS PSU (1+0)
 11. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION***Order code: RM24100FP5 (RM24100-0130C0)***

- Includes:**
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5" or 1 x Slim ODD
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 7. 1 x Aluminum Front Plate, Decoration Strip
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 9. 1 x Low Profile PCI Slots Rear Window
 10. 1 x 500W Flex PSU
 11. 1 x Single Packing Carton, w/ Chenbro Logo


Order code: RM24100RP5(RM24100-0190C0)

1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
2. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5" or 1 x slim ODD
3. 1 x 2-bay 2.5" HDD holder
4. 1 x Front display and Control switch cable, 800mm
5. 1 x USB 3.0 cable
6. 1 x power cable, AC-Inlet, internal, 100/560mm, Right Angle
7. 1 x Aluminum Front Plate, Decoration Strip
8. 1 x 80mm fan, 3P3C, T32, ball bearing, L300mm
9. 1 x Low Profile PCI slots Rear Window
10. 1+1 550W CRPS PSU
11. 1 x single packing carton, w/Chenbro logo

PRODUCT DESCRIPTION



• RM24504T3RP5/RM24504T3FP5

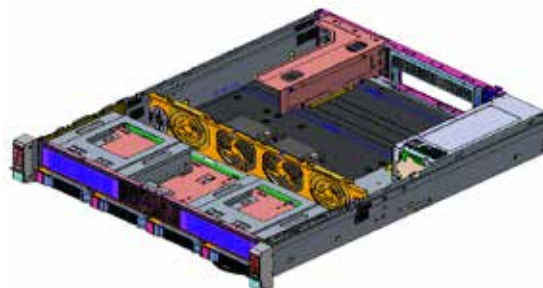

• RM24504T3RP8G1



Order code: **RM24504T3RP5 (RM24504H01*15508)**

- Includes:
1. 2 x 5.25" Open Bay Support
 2. 1 x 4-port to port, 12Gb/s SATA&SAS Backplane
 3. 1 x LED Board, w/ USB
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro Motherboard
 6. 1 x Fan Bar, Middle, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L350mm
 8. 2 x Fan Cover, For Air flow Management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 1 x LP Window for Single 2U PSU
 15. PSU, 1+1 Redundant, 550W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: **RM24504T3FP5 (RM24504H01*15509)**

- Includes:
1. 2 x 5.25" Open Bay Support
 2. 1 x 4-port to Port, 12Gb/s SATA&SAS Backplane
 3. 1 x LED Board, w/USB
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro Motherboard
 6. 1 x Fan Bar, Middle, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L350mm
 8. 2 x Fan Cover, For Air Flow Management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4 x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 1 x LP Window for Single 2U PSU
 15. PSU, Single 550W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION

Order code: RM24504T3RP8G1 (RM24504H03*15792) Will be phased out after stock is depleted.

- Includes:**
1. 2 x 5.25" Open bay support
 2. 1 x 4-port to port , 12Gb/s SATA&SAS backplane
 3. 1 x LED board, w/USB
 4. 1 x display&Switch cable, 2*12P to 10P*2, 500mm, discrete Pins
 5. 1 x display&Switch cable, 2*12P(SSI) to 10P*2(Female), 500mm, for Supermicro motherboard
 6. 1 x fan Bar, Middle
 7. 2 x 80mm fan, 11000RPM PWM, T38, ball bearing, L70mm
 8. 2 x fan cover, for air flow management
 9. 1 x PSU mounting bracket, single
 10. 1 x Front Top cover, Non toolless
 11. 1 x Rear Top cover, Non toolless
 12. 4x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD holder, internal, blue, toolless
 14. 3xFull Height riser bracket
 15. PSU, 1+1 redundant, 800W
 16. Single packing carton, w/Chenbro logo, Pallet

Order code: RM24504-0070A0

- Includes:**
1. Rack Height: 2U
 2. Motherboard Form Factor: ATX (12" x 9.6")
 3. Dimensions (D x W x H): 557.2 x 438 x 87 (mm)/ 21.94" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 4-bay, 3.5" hot-swap toolless HDD, 2x 5 ¼" bay
 7. Fan: 3x fan(80*T38,SUNON),hot-swap, 7500RPM,PWM, L70MM,4P4C
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 550w / 80+ Gold/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, IEC/CB, CE, FCC, CCC, BSMI,GB, KCC
 11. Expansion Slots: 7 x Low Profile or 3 x Full Height @ PCIe slot 6
 12. Cargo Box: L5 Package, 730*590*190MM,22KGF/CM2,AB FLUTE,for PRINTING carton(CHENBRO CIS)
 13. Pallet Capacity: 10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
4-bay Tri-Mode, SAS/SATA/NVMV Gen4/1 x MiniSAS port & 4 x slimSAS 4i port/ 4-Pin I2C/ 2 x 4-Pin 12v

PRODUCT DESCRIPTION



• Single PSU Rear Window



• CRPS Rear Window



Order code: RM24508M3RP5 (RM24508H02*15167 (FSP)) Will be phased out after stock is depleted.

- Includes:**
1. 8 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x PSU, 550W, 1+1 Redundant (CRPS Module), 80+ Platinum, w/ PMBus
 4. 1 x LED Board, w/ USB 3.0*2 (840mm)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro M/B
 7. 1 x Fan Bar, Tool-less, w/ 4 x Hot-swap Fan Bay
 8. 3 x Fan Module, 80mm, PWM, T38, Ball Bearing, L70mm, w/ hot-swap PCBA
 9. 1 x Fan Cover, For Air Flow Management
 10. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 11. 1 x Front Top Cover, Non Tool-less
 12. 1 x Rear Top Cover, Non Tool-less
 13. 1 x Slim ODD Mounting Kit, Black
 14. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 15. 1 x LP Window for CRPS
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: RM24508M3FP5 (RM24508H02*15946)

- Includes:**
1. 8 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x PSU, 500W, Single PSU, 80+ Platinum, w/ PMBus
 4. 1 x LED Board, w/ USB 3.0*2 (840mm)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro M/B
 7. 1 x Fan Bar, Tool-less, w/ 4 x Hot-swap Fan Bay
 8. 3 x Fan Module, 80mm, PWM, T38, Ball Bearing, L70mm, w/ hot-swap PCBA
 9. 1 x Fan Cover, For Air Flow Management
 10. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 11. 1 x Front Top Cover, Non Tool-less
 12. 1 x Rear Top Cover, Non Tool-less
 13. 1 x Slim ODD Mounting Kit, Black
 14. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 15. 1 x LP Window for CRPS
 16. Single Packing Carton (Brown box)

PRODUCT DESCRIPTION

Order code: **RM24512E3RP5 (RM24512H03*14461)**

- Includes:
1. 12 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 12-port 12Gb/ S mini-SAS HD Expander Backplane, Active
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 1 x Fan Dummy Cover, For Air Flow Management
 10. 1 x Low Profile Rear Window (RM23808-103B), 7-slot
 11. 1 x Dummy Cover, For Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x (1+1) CRPS, 550W, Full Range, w/ mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ easy-lift Latch
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: **RM24512M3-R550L (RM24512H03*14465)**

- Includes:
1. 12 x 3.5" HDD tray, toolless, Black/blue
 2. 1 x 12-port 12Gb/s mini-SAS HD backplane, Passive
 3. 1 x LED board, w/USB 3.0*2(840mm), w/cables
 4. 1 x display cable, 2*12P to 2*10P, 500mm, discrete Pins
 5. 1 x Extension cable, 2*12P(SSI) to 2&10P(Female), 500mm, for Supermicro motherboard
 6. 1 x fan Bar, Middle, toolless, w/4 x PCBA
 7. 3 x 80mm fan, PWM, T38, ball bearing, L70mm, hot-swap
 8. 1 x fan cover, for air flow management
 9. 1 x PSU, 550W, 1+1 redundant(CRPS Module), 80+ Platinum, w/PMBus, Active PFC & Full Range
 10. 1 x Rear Window Frame, for CRPS
 11. 1 x Front Top cover, Non toolless
 12. 1 x Rear Top cover, Non toolless
 13. 1 x dummy cover, for Rear 2-bay 2.5" HDD Cage Opening
 14. Single packing carton, w/Chenbro logo, Pallet

Order code: **RM24512-0120A0**

- Includes:
1. Rack Height: 2U
 2. Motherboard Form Factor: ATX (12" x 9.6")
 3. Dimensions (D x W x H): 557.2 x 438 x 87 (mm)/ 21.94" x 17.24" x 3.42"
 4. Front Panel Control: 2 x USB 3.0 / 1 x power status, 2 x Lan activity, 1 x UID, 1 x system alarm, 1x HDD status
 5. Ear Bracket: Plastic Rack ear
 6. Drive Bays: 12-bay, 3.5" hot-swap toolless HDD (2.5" Screw-in),
 7. Fan: 3x fan, 80*80*38, 11000RPM, PWM, L70MM, 4P4C, single, ball, V80E12BS2A5-07T841, NIDEC
 8. PSU Form Factor/Wattage/Efficiency Rating/Dimensions: CRPS,, 550w / 80+ Gold/L185*W73.5*H40mm
 9. Power Input Voltage: 100~240VAC @ 50~60Hz
 10. PSU Safety Certification: UL, TUV, IEC/CB, CE, FCC, CCC, BSMI, GB, KCC
 11. Expansion Slots: 7 x Low Profile or 3 x Full Height @ PCIe slot 6
 12. Cargo Box: L5 Package, 730*590*190MM, 22KGF/CM2, AB FLUTE, for PRINTING carton(CHENBRO CIS)
 13. Pallet Capacity: 10 pcs per Pallet
 14. Backplane/Single Conn/I2C/Power Conn:
4-bay SAS/SATA+ 8-bay Tri-Mode, SAS/SATA/NVMV Gen4/ 3 x MiniSAS port & 4 x slimSAS 8i port/ 4-Pin I2C/ 2 x 8-Pin I2v

PRODUCT DESCRIPTION




• Rear I/O




Model		RM252 2U Edge Computing Chassis
Series	RM25204T3RP8 (RM25204H01*15669)/ RM25204N4RP8 (RM25204H01*15867) RIO	
M/B Form Factor	SSI EEB (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")	
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm) ; 17.72" x 17.24" x 3.43"	
Drive Bay	4-Bay 2.5" HDD, Hot-swap, Front 2-Bay 2.5" HDD, Hot-swap, Rear (Option)	
Storage Backplane	RM25204T3RP8 (RM25204H01*15669): 2 x 2-port 12Gbps SAS/SATA * 1 x miniSAS-HD & 2 x 7-pin SATA RM25204N4RP8 2x2-port NVME GEN4, 4x SlimSAS	
PSU Form Factor	2U Redundant CRPS (1+1), 800W (80+, Platinum)	
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm	
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0	
Cooling Fans	4 x 80mm, PWM, 11000 RPM, Hot-swap	
System Security	-	
Expansion Slot	7 x Low Profile or 3 x Full Height (Option)	
Supported Rack Mount Kit (Options)	- Slide rail kit w/o CMA support (2-Section): Works for 438 mm width rack chassis, P2P: 26" to 33", Traveling Distance: 19, Tool-less - Cable Management Arm (CMA)	
Order Number		Description
RM25204N4RP8 (RM25204H01*15867)		RM25204 Rear I/O 2U 4-Bay 2.5" NVMe Gen4 Edge Computing Chassis (800W 1+1)
Options		Description
384-25203-3301AO		Rail, Slide, 2U, Travel: 480MM, Chassis W: 438MM, Tool-less, RM252/352
384-PCB000019BAO		Riser KIT, RM25206, RISER (62368), w/ rear Window w/ riser Card X16, 12Pcs/CTN

RM252 (MIO)

PRODUCT DESCRIPTION

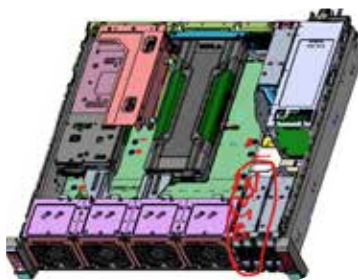

• RM2520401-0010A0

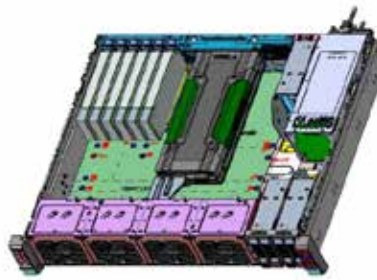

• RM2520401-0020A0

Model RM252 2U Edge Computing Chassis	
Series	RM2520401-0010A0/ RM2520401-0020A0
M/B Form Factor	SSI EEB (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm) ; 17.72" x 17.24" x 3.43"
Drive Bay	4-Bay 2.5" HDD, Hot-swap, Front 2-Bay 2.5" HDD, Hot-swap, Rear
Storage Backplane	RM2520401-0010A0/ RM2520401-0020A0 2 x 2-port 12Gbps SAS/ SATA, 1 x 2-port NVME GEN 4
PSU Form Factor	2U Redundant CRPS (1+1), 1200W
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0
Cooling Fans	4 x 80mm, PWM, 11000 RPM, Hot-swap
System Security	-
Expansion Slot	RM2520401-0010A0: 1 x Low Profile +2 x Full Height, RM2520401-0020A0: 6 x Low Profile +1 x Full Height
Supported Rack Mount Kit (Options)	- Slide Rail Kit w/ o CMA support (2-Section): Works for 438 mm Width Rack Chassis, P2P: 26" to 33", Traveling Distance: 19, Tool-less - Cable Management Arm (CMA)
Order Number	
RM2520401-0010A0, 2U, 17.7", 6Bay*2.5", NVME GEN 4,SAS/SATA, 4*8038, CRPS (1+1), 1200W, Single+Pallet, 8Pcs/Pallet, RIO, MIO, Support #6.5 Slot MB	
RM2520401-0020A0, 2U, 17.7", 6BAY*2.5", NVME GEN 4,SAS/SATA, 4*8038, CRPS (1+1), 1200W, Single+Pallet, 8Pcs/Pallet, RIO, LP, Support #6.5 Slot MB	
Options	Description
384-25203-3301A0	Rail, Slide, 2U, Travel: 480MM, Chassis W: 438MM, Tool-less, RM252/352

PRODUCT DESCRIPTION



Model RM253	
Series	22-300012-003000 2U, 2x USB 3.0, 24x 3.5" SAS/SATA, MiniSAS-HD expander BP, 1200W (1+1) Redundant
M/B Form Factor	ATX (12" x 9.6")
Dimension (D x W x H)	TBD
Drive Bay	2 x 12-Bay 3.5" HDD, Hot-swap (on Both Side) 1 x 2-Bay 2.5" HDD, Hot-swap, Rear (Option)
Storage Backplane	2 x 12-port 12Gbps SAS Expander 1 x 2-port 12Gbps SAS/SATA or NVMe U.2 (Option)
PSU Form Factor	2U Redundant CRPS (1+1), 1200W (80+, Platinum)
Indicators	1 x Power Status, 1 x UID, 2 x LAN Activity 1 x HDD Status, 2 x HDD Failure, 1 x System Alarm
Front Control	1 x Power on/ off, 1 x UID, 1 x System Reset, 2 x USB 3.0
Cooling Fans	Middle: 6 x 60 mm, PWM, 23000 RPM, Hot-swap
System Security	-
Expansion Slot	7 x Low Profile or 3 x Full Height (Option)
Supported Rack Mount Kit (Options)	- Slide Rail Kit with CMA Support: Works for 438 mm Width Rack Chassis, P2P: 26" to 35", Traveling Distance 28.1", Maximum Load Weight: 59KG, Tool-less - Cable Management Arm (CMA)
Options	
384-RAL000005SA0: Rail, Travel: 715MM, Chassis W 438MM, Tool-Less, A6612878, RM25324	
126-25112-3001A0: Cable, MINI SAS HD TO MINI SAS HD, 800MM, Amphenol, Flat Type	

PRODUCT DESCRIPTION



Order code: RM31616-0030F0

- Includes:**
1. Motherboard Form Factor: SSI EEB (12" x 13")
 2. Drive Bays: External: 16 x 3.5" hot-swap, 1 x slim ODD, 1 x slim FDD
 3. Backplane: 12Gb/s mini-SAS HD w/expander
 4. Fans: Middle: 4 x 80mm (T=38mm), Hot-swap
 5. Expansion Slots: 7 x Full Height and Full Length
 6. Front Controls: 1 x power On/Off, 1 x alarm Mute, 1 x system Reset, 2 x USB 3.0
 7. Indicators: 1 x power status, 1 x HDD activity, 1 x LAN activity, 1 x fan Failure & Overheat
 8. PSU: 1+1 CRPS, 1200W
 9. Included Accessories: Slide rails
 10. Packaging: 1 x single packing carton, w/Chenbro logo, Pallet

PRODUCT DESCRIPTION



• Front I/O



• Rear I/O

Model	RM35206 FIO, RM35206 RIO
Series	22-300012-003000 2U, 2x USB 3.0, 24x 3.5" SAS/SATA, MiniSAS-HD expander BP, 1200W (1+1) Redundant
M/B Form Factor	SSI EEB (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
Dimension (D x W x H)	450.0 x 438.0 x 131.0 (mm); 17.72" x 17.24" x 5.16"
Drive Bay	6-Bay 2.5" HDD, Hot-swap, Front 2-Bay 2.5" HDD, Hot-swap, Rear (Option)
Storage Backplane	- RM35206T3RPF (RM35206H01*15671): Rear I/O, 1 x 6-Port 12Gbps SAS/SATA (1 x MiniSAS-HD + 2 x SATA) 1 x 2-Port 12Gbps SAS/SATA or NVMe U.2 (Option) - RM35206T3RPFU2 (RM35206-0040A0): Front I/O, 1 x 6-Port 12Gbps SAS/SATA (1 x miniSAS-HD + 2 x SATA) 1 x 2-Port 12Gbps SAS/SATA or NVMe U.2 (Option) - RM35206N4RPF (RM35206H04*15870): Rear I/O, 2x3 Port Nvme Gen4, 6x SlimSAS port - RM35206N4RPFU1 (RM35206-0060A0): Front I/O, 2x3 Port Nvme Gen4, 6x SlimSAS port
PSU Form Factor	2U Redundant CRPS (1+1), 1600W (80+, Platinum)
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0
Cooling Fans	4 x 80mm, PWM, 11000 RPM, Hot-swap
Expansion Slot	8 x Full Height (4 x Double-width GPU)
Supported Rack Mount Kit (Options)	- Slide Rail Kit w/ o CMA Support (2-Section): Works for 438 mm Width Rack Chassis, P2P: 26" to 33", Traveling Distance: 19", Tool-less - Cable Management Arm

Options

384-MIX000098SA0:SK, HDD, 2Port HDD Cage Module/ Cable/ SAS/ SATA BP, RM35206

384-MIX000132BA0:SK, 2Port HDD Cage Module/ Cable/ NVME Gen3, RM35206

PRODUCT DESCRIPTION



• RM41300/RM41300-F



• RM41300-F1



Order code: *RM41300-F1 (RM41300H02*12186)*

- Includes:**
1. 1 x 1-door Front Bezel, Black
 2. 1 x Fan Cage, w/1pcs 120mm, T25, PWM Fan, L650mm
 3. 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 4. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 5. 1 x PSU Bracket, PS/2, Rear Window Side
 6. 1 x PSU Bracket, PS/2, Wire-Harness Side (RM42300-14C)
 7. 1 x Add-on Card Retainer, 7-slot
 8. 1 x USB 2.0 Cable, 2-port, 750mm
 9. 1 x Intrusion Cable, 600mm
 10. 1 x Switch/Reset Cable, 2P, 750mm
 11. 1 x LED/Switch Cable, 750mm
 12. Single Packing Carton, w/ Chenbro Logo

Order code: *RM41300-F1U3 (RM41300-0080E0)* Will be phased out after stock is depleted.

- Includes:**
1. 1 x 1-door Front Bezel, Black
 2. 1 x fan Cage, w/1pcs 120mm, T25, PWM fan , L650mm
 3. 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration kits
 4. 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 5. 1 x PSU bracket, PS/2, Rear Window Side
 6. 1 x PSU bracket, PS/2, Wire-Harness Side(RM42300-14C)
 7. 1 x Add-on card Retainer, 7-slot
 8. 1 x USB 3.0 cable, 2-port, 750mm
 9. 1 x Intrusion cable, 600mm
 10. 1 x Switch/Reset cable, 2P, 750mm
 11. 1 x LED/Switch cable, 750mm
 12. single packing carton, w/Chenbro Logo

Order code: *RM41300-FS81 (RM41300H03*12193)* Will be phased out after stock is depleted.

- Includes:**
1. 1 x Top , w/2pcs 120*25mm PWM fan , L650mm
 2. 1 x fan Cage, w/1pcs 120mm, T25, PWM fan , L650mm
 3. 1 x Exposed Drive Cage, 3 x 5.25" + 1 x 3.5", w/ Anti-Vibration kits
 4. 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 5. 1 x PSU bracket, PS/2,
 6. 1 x 2-port USB2.0 cable, 750mm
 7. 1 x LED & Switch cable, 750mm
 8. 1 x Switch/Reset cable, 2P, 75mm
 9. 1 x Intrusion cable, 600mm
 10. 2 x 80mm fan, 3P3C, Two ball bearing, L650mm, on Rear Window
 11. 1 x Front Bezel, 1-door, Black
 12. 1 x Side Stand Kit, FOOT STAND+SANP RIVET+cabinet ear for GPU
 13. single packing carton, w/Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM41300-FS81U3 (RM41300H12*13729) Will be phased out after stock is depleted.

- Includes:**
- 1 x Top , w/2pcs 120*25mm PWM fan , L650mm
 - 1 x fan Cage, w/1pcs 120mm, T25, PWM fan , L650mm
 - 1 x Exposed Drive Cage, 3 x 5.25" + 1 x 3.5", w/ Anti-Vibration kits
 - 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 - 1 x PSU bracket, PS/2,
 - 1 x 2-port USB 3.0 cable, 750mm
 - 1 x LED & Switch cable, 750mm
 - 1 x Switch/Reset cable, 2P, 75mm
 - 1 x Intrusion cable, 600mm
 - 2 x 80mm fan, 3P3C, Two ball bearing, L650mm, on Rear Window
 - 1 x Front Bezel, 1-door, Black
 - 1 x Side Stand Kit, FOOT STAND+SANP RIVET+cabinet ear for GPU
 - single packing carton, w/Chenbro Logo

Order code: RM41300-F (RM41300H02*12185)

- Includes:**
- 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration kits
 - 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 - 1 x fan Cage, w/1pcs 120mm, T25, PWM fan , L650mm
 - 1 x PSU bracket, PS/2, Rear Window Side
 - 1 x PSU bracket, PS/2, Wire-Harness Side
 - 1 x Add-on card Retainer, 7-slot
 - 1 x USB2.0 cable, 2-port, 750mm
 - 1 x Intrusion cable, 600mm
 - 1 x Switch/Reset cable, 2P, 750mm
 - 1 x LED/Switch cable, 750mm
 - single packing carton, w/Chenbro Logo

Order code: RM41300-0030E0

- Includes:**
- 1x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration kits
 - 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 - 2 x 80mm fan, 3P3C, Two ball bearing, L650mm, on Rear Window
 - 1 x fan Cage, w/1pcs 120mm, T25, PWM fan , L650mm
 - 1 x ATX PSU bracket
 - 1 x CRPS PSU bracket in accessory
 - 1 x Add-on card Retainer, 8-slot
 - 1 x USB 3.0 cable, 2-port, 750mm (84H342310-012)
 - 1 x Intrusion cable, 600mm
 - 1 x Switch/Reset cable, 2P, 750mm
 - 1 x LED/Switch cable, 750mm
 - 1 x 8-Slot PCIe 3.0 rear window (384-41308-310000)
 - 1 x 1-door Front Bezel, Black (F1 Bezel 84H341310-004)
 - 1 x L6 single packing carton, w/Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM41300-0120E0

- Includes:**
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration kits
 2. 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 3. 2 x 80mm fan, 3P3C, Two ball bearing, L650mm, on Rear Window
 4. 1 x fan Cage, w/ 1pcs 120mm, T25, PWM fan , L650mm
 5. 1 x ATX PSU bracket in accessory box
 6. 1 x CRPS 800W (1+1)PSU
 7. 1 x Add-on card Retainer, 8-slot
 8. 1 x USB 3.0 cable, 2-port, 750mm (84H342310-012)
 9. 1 x Intrusion cable, 600mm
 10. 1 x Switch/Reset cable, 2P, 750mm
 11. 1 x LED/Switch cable, 750mm
 12. 1 x 8-Slot PCIe 3.0 rear window (384-41308-310000)
 13. 1 x 1-door Key Lock Front Bezel, Black (FI Bezel 84H341310-004)
 14. 1 x L6/L5 single packing carton, w/Chenbro Logo

Options

1. 84H341310-005 Bezel, Two Doors, RM413/423
2. 84H341310-004 Bezel, One Door, RM413/423
3. 384-41311-3101A0 Fan, RM41300, Mix, Fan Module (8038)

PRODUCT DESCRIPTION



• RM41824 CRPS Main



• RM41824 CRPS Inside

Order code: *RM41824-0010G0 (24-port 12Gb/s mini-SAS HD Expander BP, 1200W CRPS, Slide Rail)*

- Includes:**
1. 1 x AS'Y MISCE.,12G MINI SAS HD (W/EXPANDER),RM41824,24port,w/ bracket
 2. 4 x 80mm fan, PWM, T38, Two ball bearing, L90mm (Delta)
 3. 1 x Add-on card Retainer with 7pcs card Latch
 4. 2 x Front USB 3.0 connector with cable 1000mm & bracket
 5. 1 x Front LED board, w/ display cable, 800mm
 6. 1 x Acbel 1+1 CRPS , R1CA2122A 1200W w/ bracket & screw
 7. 1 x ball bearing Slide Rail, 731 mm, Non-toolless, 703.9 mm travel
 8. Double carton w/Pallet, Chenbro logo

PRODUCT DESCRIPTION



Order code: RM42200-1 (RM42200H03*6342) Will be phased out after stock is depleted.

- Includes:
1. 1 x 120mm Fan, 3P3C, T25, Ball Bearing, L650mm
 2. 2 x 80mm Rear Fan Holder
 3. 1 x Air Filter, For 120mm Fan, Black
 4. 1 x Add-on card Retainer, 7-slot
 5. 1 x Control Panel w/ switch & LEDs
 6. 1 x 1-port USB 2.0 Cable, 700mm
 7. 1 x Intrusion Cable, 600mm
 8. Single Packing Carton, w/ Chenbro Logo

Order code: RM42200-1U3 (RM42200H13*13814)

- Includes:
1. 1 x 120mm Fan, 3P3C, T25, Ball Bearing, L650mm
 2. 2 x 80mm Rear Fan Holder
 3. 1 x Air Filter, For 120mm Fan, Black
 4. 1 x Add-on Card Retainer, 7-slot
 5. 1 x Control Panel w/ Switch & LEDs
 6. 1 x 1-port USB 3.0 Cable, 700mm
 7. 1 x Intrusion Cable, 600mm
 8. Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION



• RM42300-F



• RM42300-FI



• RM42300-F



• RM42300-FI

Order code: *RM42300-F (RM42300H02*15325)*

- Includes:**
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration Kits
 2. 1 x 4-bay Internal 3.5" HDD Cage, w/ Anti-Vibration Kits
 3. 1 x PSU Bracket, PS/2, Rear Window Side
 4. 1 x PSU Bracket, PS/2, Wire-Harness Side
 5. 1 x Add-on Card Retainer, 7-slot
 6. 1 x USB 2.0 Cable, 2-port, 750mm
 7. 1 x Intrusion Cable, 600mm
 8. 1 x Switch/Reset Cable, 2P, 750mm
 9. 1 x Display Cable, 750mm
 10. Front 120mm Fan with Filter
 11. Single Packing Carton, w/ Chenbro Logo

Order code: *RM42300-FI (RM42300H02*15326)*

- Includes:**
1. 1 x Fan Cage, w/ 120mm, T25, PWM, L650mm
 2. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 3. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 4. 1 x PSU Bracket, PS/2, Rear Window Side
 5. 1 x PSU Bracket, PS/2, Wire-Harness Side
 6. 1 x Add-on card Retainer, 7-slot
 7. 1 x USB 2.0 Cable, 2-port, 750mm
 8. 1 x Intrusion Cable, 600mm
 9. 1 x Switch/Reset Cable, 2P, 750mm
 10. 1 x Display Cable, 750mm
 11. 1 x 1-door Front Bezel, Black
 12. Single Packing Carton, w/ Chenbro Logo

Order code: *RM42300-FU3 (RM42300-0040E0)* Will be phased out after stock is depleted.

- Includes:**
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 2. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 3. 1 x PSU Bracket, PS/2, Rear Window Side
 4. 1 x PSU Bracket, PS/2, Wire-Harness Side
 5. 1 x Add-on Card Retainer, 7-slot
 6. 1 x USB 3.0 Cable, 2-port, 750mm
 7. 1 x Intrusion Cable, 600mm
 8. 1 x Switch/Reset Cable, 2P, 750mm
 9. 1 x Display Cable, 750mm
 10. Front 120mm Fan with Filter
 11. Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

Order code: *RM42300-FIU3 (RM42300H11*13739)*

- Includes:**
- 1 x Fan Cage, w/120mm, T25, PWM, L650mm
 - 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 - 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 - 1 x PSU Bracket, PS/2, Rear Window Side
 - 1 x PSU Bracket, PS/2, Wire-Harness Side
 - 1 x Add-on card Retainer, 7-slot
 - 1 x USB 3.0 Cable, 2-port, 750mm
 - 1 x Intrusion Cable, 600mm
 - 1 x Switch/Reset Cable, 2P, 750mm
 - 1 x Display Cable, 750mm
 - 1 x 1-door Front Bezel, Black
 - Single Packing Carton, w/ Chenbro Logo

Order code: *RM42300-0170EO*

- Includes:**
- 1 x fan Cage, w/120mm, T25, PWM, L650mm
 - 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration kits
 - 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 - 1 x PSU bracket, PS/2, Rear Window Side/Wire-Harness Side
 - PSU CRPS 800W 1+1
 - 1 x Add-on card Retainer, 7-slot
 - 1 x USB 3.0 cable, 2-port, 750mm
 - 1 x Intrusion cable, 600mm
 - 1 x Switch/Reset cable, 2P, 750mm
 - 1 x display cable, 750mm
 - 1 x 1-door Front Bezel, Black
 - Single packing carton, w/Chenbro Logo

Order code: *RM42300-F2(RM42300-0050EO)* Will be phased out after stock is depleted.

- Includes:**
- 1 x fan Cage, w/120mm, T25, PWM, L650mm
 - 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration kits
 - 1 x 4-bay internal 3.5" HDD Cage, w/Anti-Vibration kits
 - 1 x PSU bracket, PS/2, Rear Window Side
 - 1 x PSU bracket, PS/2, Wire-Harness Side
 - 1 x Add-on card Retainer, 7-slot
 - 1 x USB2.0 cable, 2-port, 750mm
 - 1 x Intrusion cable, 600mm
 - 1 x Switch/Reset cable, 2P, 750mm
 - 1 x display cable, 750mm
 - 1 x 1-door Front Bezel, Black
 - Single packing carton, w/Chenbro Logo

Options

- 84H341310-005 Bezel, Two Doors, RM413/423
- 84H341310-004 Bezel, One Door, RM413/423
- 384-41311-3101A0 Fan, RM41300, Mix, Fan Module (8038)

PRODUCT DESCRIPTION



Model	RM43736
Series	RM43736E3RPCUI (RM43736-0010A0) (Bundle SKU CMA+Rail)
M/B Form Factor	SSI EEB (12" x 13"), ATX (12" x 9.6"), mATX (9.6" x 9.6")
Dimension (D x W x H)	660.0 x 438.0 x 175.0 (mm) ; 25.98" x 17.24" x 6.88 "
Drive Bay	3 x 12 Bay 3.5" HDD Hot-swap Module, Front / Left / Right * Option: 2 Bay 2.5" HDD Hot-swap Module, Rear
Storage Backplane	12-port 12Gbps SAS Expander Backplane * Option: - 2 Port 12Gbps SAS/SATA - 2 Port NVMe Gen3 - 2 Port NVMe Gen4
PSU Form Factor	Redundant CRPS (1+1), 1200W (80+, Platinum)
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0
Cooling Fans	Middle - 4 x 80 mm (T: 38mm), 14400RPM, PWM, Hot-swap, 5A Fan Board Rear - 4 x 80 mm (T: 38mm), 11000RPM, PWM, Hot-swap (Default) - 1 x 80 mm (T: 38mm), 11000RPM, PWM, Hot-swap (Option) - 3A Fan Board
System Security	Intrusion Switch
Expansion Slot	7 x Low Profile or 3 x Full Height (Option)
Included Supported Rack Mount kit	- Slide Rail Kit with CMA Support: Works for 438 mm width Rack Chassis, P2P: 26" to 36.7", Traveling Distance 28.5", Maximum Load Weight: 59KG, Tool-less: 384-RAL00001BA0
Included	Cable Management Arm (CMA): 84H349010-006
Net Weight	25KG/ pcs
Gross Weight	28.64KG/ CTN
Cubic Feet	5.34
Pallet Size (mm)	1200*840*120
Cartons per Pallet	6 pcs
Container Loading	20' FCL: 132pcs / 40' FCL: 276pcs (Single Packing + Pallet)

PRODUCT DESCRIPTION




• RM43348 CRPS Main

Order code: *RM43348-0010C0: w/ 12Gbps min-SAS HD BP, 1200W CRPS, Rail*

- Includes:**
1. 1 x 24-port 12Gb/s mini-SAS HD Backplane, Left
 2. 1 x 24-port 12Gb/s mini-SAS HD Backplane, Right
 3. 1 x 2-bay 2.5" HDD Cage, w/2-port 6Gbps BP, Rear
 4. 1 x 3.5" HDD Holder, 2-bay
 5. CRPS, 1+1, 1200W, w/Power distribution board
 6. 4 x 80mm Fan, Dual Rotor, PWM, Ball Bearing, L35mm, w/ fan Holder
 7. 1 x PCBA, USB 2.0, Left
 8. 1 x PCBA, USB 2.0, Right
 9. 1 x Ball Bearing Slide Rail, 845 mm, Tool-less, 737 mm Travel
 10. DOUBLE CTN+PALLET

PRODUCT DESCRIPTION

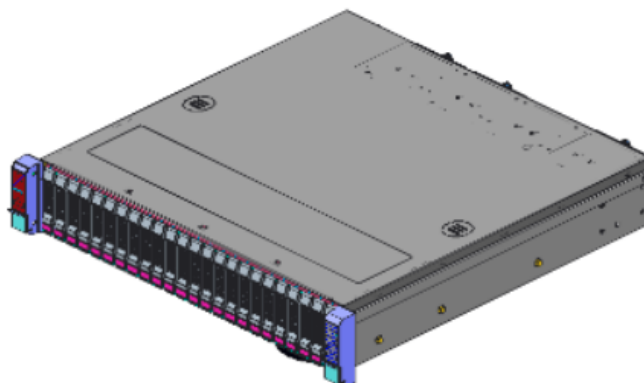

Model	DS252
Series	DS25224DD3RP5 (DS2522400-01*910796)
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm); 17.72" x 17.24" x 3.43"
Drive Bay	24x 2.5" hot-swap bays
Storage Backplane	3x 8-port 12 Gbps SAS, dual-port, for 2.5" drives
PSU Form Factor	550W 1+1 CRPS
Front Indicators	1 x Power Status, 1 x UID, 1 x System Status
Front Control	1 x Power On/Off, 1 x UID
Cooling Fans	Rear: 80mm (3), T=38mm, Hot-swap
SAS Expander	2 x 40-port expanders

PRODUCT DESCRIPTION




Model	DL25212-0010A0
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm); 17.72" x 17.24" x 3.43"
Drive Bay	12 Bay 3.5" HDD Hot Swap Module, Front
Storage Backplane	12 x 3.5" SAS4 Backplane
PSU Form Factor	Redundant CRPS (1+1), 550W (80+ Platinum)
Indicators	1 x Power Status, 1 x UID, 1 x System Status
Front Control	1 x Power On/Off, 1 x UID
Cooling Fans	3 x 80mm(T:38MM) Fan Module, 1100 RPM, PWM, Hot-swap
Slide Rail	Slide Rail Kit can support CMA: Works for 438 mm Width Rack Chassis, P2P 26 to 33", Traveling Distance 19", Tool-Less
Metal Thickness	1.2mm
Materials	SGCC
Net Weight	11.8 KG/ pcs
Gross Weight	14.8 KG/ ctn
Cubic Feet	2.8
Pallet Size	1200 x 760mm
Cartons Per Pallet	8 Pcs
Container Loading	20' FCL: 208pcs/ 40' FCL: 448pcs

PRODUCT DESCRIPTION

Features

- ASRock® Server Board E3C252D4U
- Supports M/B size up to Micro-ATX (9.6" x 9.6")
- Supports Intel® Xeon® E-2300 and 10th Gen Intel® Pentium® series processors, Single Socket H5 (LGA1200)
- 4 DIMM slots (2DPC), supports DDR4 ECC/non-ECC UDIMM
- 1U single 400W (80+ Platinum)
- 1 x PCIe 4.0 x16 , FHHL
- Intel® C252 (6 SATA 6Gb/s; RAID 0/1/5/10) : 5 SATA 7-pin, 1 SATA DOM or 1 M.2

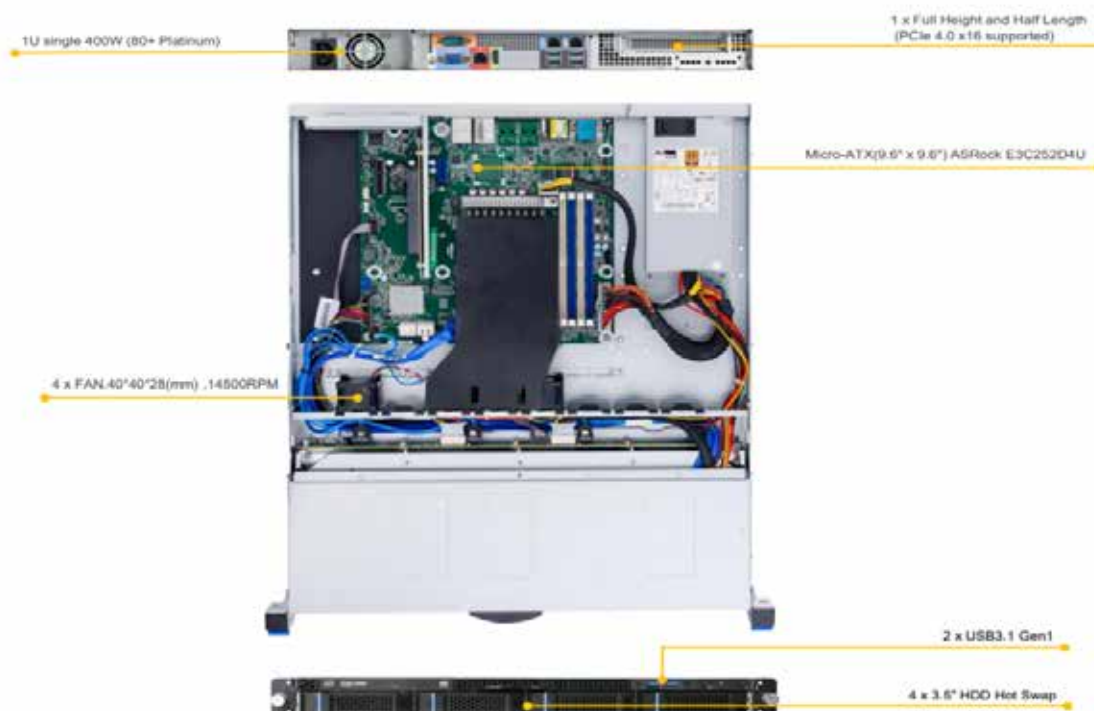

Order code: **RB1460401-0010A0**

- Includes:**
1. Motherboard: ASRock E3C252D4U
 2. CPU socket: LGA1200, supports Intel® Xeon® E-2300 and Intel® Pentium® series
 3. DIMM: 4 slots (2 DPC), supports DDR4 ECC/non-ECC UDIMM
 4. Intel® C252 (6 SATA 6 Gb/s, RAID 0/1/5/10) 5 SATA 7 pin, 1 SATA DOM or 1 M.2
 5. Drive bay 4 x 3.5" HDD Hot Swap
 6. Storage backplane 3.5" 4-port 12 Gb/s, SAS/SATA
 7. Indicators 1 x power status, 2 x LAN activity, 1 x UID, 1 x system alarm, 1 x HDD status
 8. Front Control 1 x power On/Off, 1 x system Reset, 2 x USB3.1 Gen1
 9. Cooling fans 4 x fan, 40*40*28(mm) ,14500RPM
 10. PCIe Slot 1 x Full Height and Half Length (PCIe 4.0 x16 supported)
 11. PSU Form Factor 1U single 400W (80+ Platinum)
 12. 1 x single packing carton, w/Chenbro logo
 13. Slide Rail Works for 438 mm Width Rack Chassis, P2P:
21.5" to 33.5", Traveling Distance 27.7", maximum load weight 39KG

PRODUCT DESCRIPTION



• 12-bay 2.5" NVMe (Tray-less)



• 4-bay 3.5" + 4-bay 2.5" Tri-mode



• 10-bay 2.5" SAS/SATA



• 4-bay 3.5" SAS/SATA

Model	RB15104M3RPFSTDUI (RB1510401-01*899500)/RB15110M3RPFSTDUI(RB1511001-01*899502)
Drive Bay	RB15110M3RPFSTDUI (RB1511001-01*899502): 2.5" SKUs: - 10 x 2.5" tool-less, hot-swap; support SAS/SATA RB15104M3RPFSTDUI (RB1510401-01*899500): 3.5" SKU: - 4 x 3.5" HDD hot-swap support SAS/SATA
Expansion Slot	Up to 3-slot PCIe 4.0: 3 x Low-Profile and Half-Length Riser 1 (CPU#0): - 1 x PCIe 4.0 x16 (LPHL) *P/N: Intel CYP1URISER1STD Interposer Riser (CPU#1): - 1 x PCIe 4.0 x8 (LPHL) *P/N: Intel CYP1URISER2KIT Riser 3 (CPU1): NVMe Gen4 expansion slot - 2 x PCIe SlimSAS x8 support up to four NVMe SSDs in the front drive bay through a backplane. - * P/N Intel CYPRISER3RTM (Option) Mezzanine Slot: OCP 3.0 module support (PCIe 4.0 x16)
Ethernet	OCP 3.0 module support for 1/10/25/40/50/100GbE (Option)
Video	Integrated 2D video controller in BMC with 128M DDR4 video memory
Rear I/O	3 x USB 3.0, 1 x VGA, 1 x RJ45 Serial Port A, 1 x RJ45 management port
Indicator	1 x System Status, 1 x HDD Activity
Front Control	1 x Power On/Off, 1 x System Reset, 1 x ID Button, 1 x USB 3.0, 1 x USB 2.0
Cooling Fan	8 x 40mm Fan, Middle Fixed, PWM, Dual Rotors, 23000 RPM
Management	AST2500 BMC with RMM4 Lite, IPMI and Redfish Support.
Power Supply	1 x Power On/Off, 1 x System Reset, 1 x ID Button, 1 x USB 3.0, 1 x USB 2.0
Slide Rail	Slide Rail Kit w/o CMA Support (2-Sections): Works for 438 mm Width 1U/2U Rack Chassis, P2P: 26" to 33", Traveling Distance 22", Maximum Load Weight: 31 kg, Tool-less (* CMA Support for 3-Sections Slide Rail Kit, Option)
Options	
384-15103-3301A0: Rail, Travel: 820 mm, Chassis Width: 438.5 mm, Tool-less, Non-auto Lock	

PRODUCT DESCRIPTION




Model	RB151FCP
Series	RB13804N4WFTU1 (RB13804H01*15121)
Ethernet	OCP 3.0 Module Support for 1/10/25/40/50/100GbE (Option)
Drive Bay	12 x 2.5" NVMe Tray-less, Hot Swap; Support NVMe Gen4
MotherBoard	Intel M50FCP2SBSTD
Expansion Slot	Riser 1 (CPU#0) - 1 x PCIe 5.0 x16, Low-Profile * P/N# Intel FCPIURISER1 Riser 2 (CPU1): - 1 x PCIe 5.0 x16, Low-Profile * P/N# Intel FCPIURISER2
Video	Integrated 2D video Controller in BMC with 128M DDR4 Video Memory
Rear I/O	3 x USB 3.0, 1 x VGA, 1 x RJ45 Serial Port A, 1 x RJ45 Management Port
Indicator	1 x System Status, 1 x HDD Activity
Front Control	1 x Power On/ off, 1 x System Reset, 1 x ID Botton, 1 x USB 3.0, 1 x USB 2.0
Cooling Fan	8 x 40mm Middle Fix Fan, PWM, Dual Rotors, 23000 RPM
Management	AST2500 BMC with RMM4 Lite, IPMI and Redfish Support
Power Supply	1300W 1+1 CRPS, 80+ Platinum
Slide Rail	Slide Rail Kit w/ o CMA support (2-Sections): Works for 438 mm Width 1U/2U Rack Chassis, P2P: 26" to 33", Traveling Distance 22", Maximum Load Weight: 31kg, Tool-less (*CMA Support for 3-Sections Slide Rail Kit, Option)
Options	Description
384-15103-3301A0	Rail, Travel:820MM, Chassis W:438.5MM, Tool-less, Non-auto Lock

PRODUCT DESCRIPTION



Model		RB245
Series		RB24508-0010A0
Dimension (D x W x H)		557.2 x 438 x 87 (mm); 21.94" x17.24" x3.43"
MotherBoard		ASRock Rack B650D4U Server Board
Support CPU		Supports AMD Ryzen 7000 Series
Support Memory		4 DIMM Slots, up to 128 GB Memory
Heatsink		2U Active Heatsink
Drive Bay		Up to 8 3.5" Hot-Swappable Drives via SATA Interface
HDD Backplane		12Gb/s Mini-SAS HD Backplane
PSU Form Factor		Single Flex 500W
Cooling Fan		80*38, 7500RPM, PWM
Expansion Slot		PCIe 5.0: 2 Slots PCIe 4.0: 1 Slot
Options		Description
Front Bezel		384-23705-3107A0/384-23705-3107B0

PRODUCT DESCRIPTION

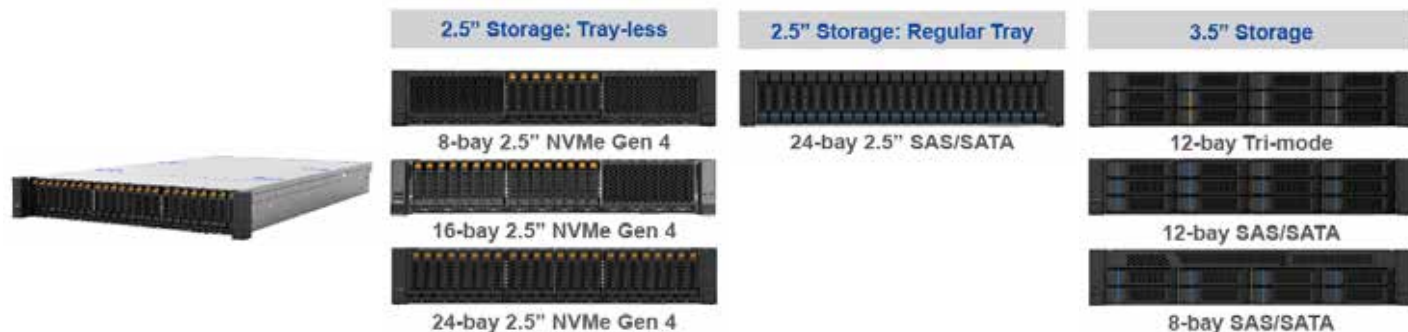

Model	RB251 Series 2U High Performance Computing Server
Chassis Type	2U Rack
Dimension (D x W x H)	770 x 438 x 87 (mm); 30.32" x 17.24" x 3.42"
MotherBoard	Intel M50CYP2SBSTD (Coyote Pass)
CPU	3rd Gen Intel Xeon Scalable Product Family, up to 270W; Dual Socket-P4 LGA4189
Chipset	C621A
CPU Heatsink	2U Passive with Air Duct (or 1U Passive with Air Duct - GPGPU Required)
Memory support	32 DIMMs (16 per CPU), 8 Channels Support DDR4 3200 RDIMM/LRDIMM or 3DS-RDIMM/LRDIMM
Onboard PCIe NVMe	8 x SlimSAS (SFF-8654), Four per CPU * Intel VROC 7.5 Support Using VROC Key (Option)
Onboard SATA	10 x SATA III Ports Support 2 x M.2 SATA/PCIe Gen 3.0 & 2 x Mini-SAS HD (SFF-8643)
Drive Bay	2 x internal 2.5" SSDs (Rear) 2.5" SKUs: - 8 x 2.5" Tray-less, Hot-swap; Support NVMe Gen 4 (up to 16 or 24-Bay, Option) - 24 x 2.5" Tool-less, Hot-swap; Support SAS/SATA 3.5" SKUs: - 8 x 3.5" Tool-less, Hot-swap; Support SAS/SATA - 12 x 3.5" Tool-less, Hot-swap; Support 8 x Tri-mode NVMe Gen 3 or SAS/SATA & 4 x SAS/SATA
Expansion Slot	PCIe 5.0: 2 slots
Ethernet	OCP 3.0 Module Support for 1/10/25/40/50/100GbE (Option)
Video	Integrated 2D Video Controller in BMC with 128M DDR4 Video Memory
Rear I/O	3 x USB 3.0, 1 x VGA, 1 x RJ45 Serial Port A, 1 x RJ45 Management Port
Indicator	1 x System Status, 1 x HDD Activity
Front Control	1 x Power On/Off, 1 x System Reset, 1 x ID Button, 1 x USB 3.0, 1 x USB 2.0
Cooling Fan	6 x 60mm Middle Hot-swap System Fan, PWM, 23000 RPM
Management	AST2500 BMC with RMM4 Lite, IPMI and Redfish Support

PRODUCT DESCRIPTION	
Power Supply	2000W 1+1 CRPS, 80+ Platinum
Slide Rail	Slide Rail Kit w/ o CMA Support (2-Sections): Works for 438 mm Width 1U/2U Rack Chassis, P2P: 26" to 33", Traveling Distance 22", Maximum Load Weight: 31kg, Tool-less (* CMA Support for 3-Sections Slide Rail Kit, Option)
Expansion Slot	Up to 8-slot PCIe 4.0: 6 x Full-height and 2 x Half-height Riser 1 (CPU#0): 3-slot PCIe 4.0 - 1 x PCIe 4.0 x16 (x16 lanes), FHFL - 1 x PCIe 4.0 x16 (x8 lanes), FHFL - 1 x PCIe 4.0 x8 (x8 lanes), FHFL * P/N# Intel CYP2URISER1STD Riser 2 (CPU#1): 3-slot PCIe 4.0 - 1 x PCIe 4.0 x16 (x16 lanes), FHFL - 1 x PCIe 4.0 x16 (x8 lanes), FHFL - 1 x PCIe 4.0 x8 (x8 lanes), FHFL * P/N# Intel CYP2URISER2STD Riser 3 (CPU#1): 2-slot PCIe 4.0 - 2 x PCIe 4.0 x16 (x8 lanes), LPHL * P/N# Intel CYP2URISER3STD
Order Number	Description
RB25108N8RPJSTD (RB2512401-01*899512)	2U 8-bay 2.5" NVMe Gen4 Server (2000W 1+1) support upgrade to 16/24-bay tray-less, NVMe Gen4 BP, 8 x PCIe 4.0, 2 x 2.5" fix, 2000W 1+1, 2-sections rail kit
RB25124E3RPJSTD	2U 24-bay 2.5" SAS/SATA Server (2000W 1+1), 2-sections rail kit
RB25112N8T4RPJSTD (RB2511201-01*899507)	2U 12-Bay 3.5" 8T4S (Tri-mode) Server (2000W 1+1) 2U 12-Bay 3.5", Tri-mode: 8T4S BP, 8 x PCIe 3.0, 2000W 1+1, 2-sections Rail Kit
RB25112E3RPJSTD (RB2511202-01*899509)	2U 12-Bay 3.5", SAS/SATA BP, 2000W 1+1, 2-sections Rail Kit 2U 12-Bay 3.5" SAS/SATA Server (2000W 1+1)
Options	Description
384-15103-3301A0	Rail, Travel:820MM, Chassis W:438.5MM, Tool-less, Non-auto Lock

PRODUCT DESCRIPTION



Model	TB1156901-0010A0
Dimension (D x W x H)	602.6 x 180.0 x 438.0 (mm); 23.72" x7.09" x17.24"
MotherBoard	GIGABYTE MU72-SU0 ATX (12" x 9.6")
CPU	Intel® Xeon® W-3300 Processor Family
Chipset	Intel® C621A
Memory support	8 x DIMMs, 8-Channel RDIMM/LRDIMM DDR4, Supports Intel® Optane™ Persistent Memory 200 Series
Onboard SATA	3 x Slim SAS for 12 x SATA 6Gb/s Ports
Drive Bays	4-Bay External HDD Hot-swap Module with 80mm Fan, 4500RPM
PCIe slot	7 x PCIe Gen4 X16 Slots
Ethernet	2 x 1Gb/s LAN ports (Intel® I210-AT) 1 x 10/100/1000 management LAN
Video	1 x VGA
Rear I/O	4 x USB 3.0, 1 x VGA, 1 x COM, 2 x RJ45, 1 x MLAN, 1 x ID Button with LED
HDD Backplane	3.5" 4-port 12 Gb/s, SAS/SATA
PSU Form Factor	PSU ATX FSP 1200W
Indicators	1 x Power Status, 1 x HDD Activity, 2 x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fan	- Front Fan : 1 x 120mm (T:25mm) Fan Support 2600RPM, and Fix Fan in the Middle, 1 x 80mm fan 4500RPM - Rear Fan : 2 x 80mm (T:38mm) Fan Support 8200RPM
Expansion Slot Opening	7 x Full Height
System Security	Intrusion Switch; Key Lock on the Front Door
Management	Aspeed® AST2600 Management Controller
Heatsink	3U Active (3000RPM)
Slide Rail	Rack handles, Slide Rail Kit can Support CMA - Works for 438 mm Width Rack Chassis, P2P: 26" to 36.7", Traveling Distance 28.5", Tool-less

PRODUCT DESCRIPTION	
Metal Thickness	1.2 mm
Materials	SGCC
Net Weight	16.85 KG
Gross Weight	23 KG
Cubic feet	6.934
Options	Description
384-MEC000327BA0	Rack Handles (a set, Left and Right), 50 Sets/ carton
84H349010-006	Cable Management Arm (CMA)
384-MIX00411B0A0	4-Bay Internal HDD Cage w/ 80mm Fan, 4500RPM
SK32801H01*15188	8 Bay 2.5" SAS/SATA Hot Swap Module, SK32801 Convert Kit: 2 x 5.25" to 8 x 2.5" External
SK41101H01*10879	Convert Kit: 1 x 5.25" to 1 x Internal 3.5", 48pcs/ carton

PRODUCT DESCRIPTION**Order code: SR10569-C4+ (SR10569H09*14541)**

- Includes:**
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm Fan, PWM, T25 + L650mm, 2600RPM with Finger Guard, Rear
 3. 1x 120mm Fan Holder, Green
 4. 1x Metal Key Lock, on Side Cover
 5. 6x 5.25" Device Rail, w/ holder Box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch cable, 2P2C, 1100mm
 8. 2x Plastic Holder for Front Fan
 9. 1x 2-port USB 3.0 cable, 900mm
 10. 1x Cable SW. (Power, Reset, Alarm Mute), 800mm
 11. 1x Cable, LED Display, 800mm
 12. 1x EMI Liner, Bottom Edge, 445mm
 13. 1x EMI Liner, Rear Edge, 200mm
 14. 1x Single Packing Carton w/ Chenbro Logo
 15. 1x 4-bay Cage, 3.5", Non Hot-swap
 16. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD cage

Order code: SR1056904T3-C4+ (SR10569-0030A0)(Bundle SKU with Hotwap Cage)

- Includes:**
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm fan, PWM, T25 + L650mm, 2600RPM with finger guard, Rear
 3. 1x 120mm fan holder, Green
 4. 1x Metal Key Lock, on side cover
 5. 6x 5.25" device Rail, w/holder box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch cable, 2P2C, 1100mm
 8. 2x Plastic holder for Front fan
 9. 1x 2-port USB 3.0 cable, 900mm
 10. 1x cable SW. (power,reset,alarm mute), 800mm
 11. 1x cable, LED display, 800mm
 12. 1x EMI Liner, bottom edge, 445mm
 13. 1x EMI Liner, rear edge, 200mm
 14. 1x single packing carton w/Chenbro logo
 15. 1x 4-bay cage, 3.5", Non hot-swap
 16. 1x 4-bay hotswap cage, 3.5"
 17. 1x fan,80mm, ball bearing, L650mm, 3P3C, for HDD cage

PRODUCT DESCRIPTION

Order code: SR10569-C4+-R800 (SR10569-0040A0)

- Includes:**
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm fan, PWM, T25 + L650mm, 2600RPM with finger guard, Rear
 3. 1x 120mm fan holder, Green
 4. 1x Metal Key Lock, on side cover
 5. 6x 5.25" device Rail, w/holder box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch cable, 2P2C, 1100mm
 8. 2x Plastic holder for Front fan
 9. 1x 2-port USB 3.0 cable, 900mm
 10. 1x cable SW. (power,reset,alarm mute), 800mm
 11. 1x cable, LED display, 800mm
 12. 1x EMI Liner, bottom edge, 445mm
 13. 1x EMI Liner, rear edge, 200mm
 14. 1x single packing carton w/Chenbro logo
 15. 1x 4-bay cage, 3.5", Non hot-swap
 16. 1x 800W, 1+1, redundant CRPS PSU
 17. 1x fan,80mm, ball bearing, L650mm, 3P3C, for HDD cage

Order code: SR10569-C4+-R1200 (SR10569-0020A0)

- Includes:**
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm fan, PWM, T25 + L650mm, 2600RPM with finger guard, Rear
 3. 1x 120mm fan holder, Green
 4. 1x Metal Key Lock, on side cover
 5. 6x 5.25" device Rail, w/holder box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch cable, 2P2C, 1100mm
 8. 2x Plastic holder for Front fan
 9. 1x 2-port USB 3.0 cable, 900mm
 10. 1x cable SW. (power,reset,alarm mute), 800mm
 11. 1x cable, LED display, 800mm
 12. 1x EMI Liner, bottom edge, 445mm
 13. 1x EMI Liner, rear edge, 200mm
 14. 1x single packing carton w/Chenbro logo
 15. 1x 4-bay cage, 3.5", Non hot-swap
 16. 1x 1200W, 1+1, redundant CRPS PSU
 17. 1x fan,80mm, ball bearing, L650mm, 3P3C, for HDD cage

Order code: SR10569-C4+-R1200(SR10569-0020A0)

- Includes:**
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm fan, PWM, T25 + L650mm, 2600RPM with finger guard, Rear
 3. 1x 120mm fan holder, Green
 4. 1x Metal Key Lock, on side cover
 5. 6x 5.25" device Rail, w/holder box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch cable, 2P2C, 1100mm
 8. 2x Plastic holder for Front fan
 9. 1x 2-port USB 3.0 cable, 900mm
 10. 1x cable SW. (power,reset,alarm mute), 800mm
 11. 1x cable, LED display, 800mm
 12. 1x EMI Liner, bottom edge, 445mm
 13. 1x EMI Liner, rear edge, 200mm
 14. 1x single packing carton w/Chenbro logo
 15. 1x 4-bay cage, 3.5", Non hot-swap
 16. 1x 1200W, 1+1, redundant CRPS PSU
 17. 1x fan,80mm, ball bearing, L650mm, 3P3C, for HDD cage

PRODUCT DESCRIPTION**Order code: SR10769-C8+ (SR10769H09*14584)**

- Includes:**
1. 1x SR10769 Front Bezel, Black
 2. 2x 4-bay Cage, 3.5", Non Hot-swap
 3. 2x 120mm Fan, PWM, Ball Bearing, L350mm, w/ finger Guard, Middle
 4. 1x 120mm Fan, PWM, Ball Bearing, L650mm, w/ finger Guard, Rear
 5. 3x 120mm Fan Holder, Green
 6. 6x 5.25" Device Rail, w/ holder Box
 7. 1x 3.5" Exposed Device Holder, Metal
 8. 4x Foot Stand, Black
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Intrusion Switch Cable, 2P2C, 1100mm
 11. 1x Cable SW. (Power, Reset, Alarm mute), 1100mm
 12. 1x Cable, LED Display, 1100mm
 13. 1x PS/2 PSU Mounting Bracket
 14. 1x EMI Liner for PCI Slot Window
 15. 1x Single Packing Carton with Chenbro Logo+ Paper Pallet

Order code: SR10769-C8+-R1200 (SR10769-0040B0)

- Includes:**
1. 1x SR10769 Front Bezel, Black
 2. 2x 4-bay Cage, 3.5", Non Hot-swap
 3. 2x 120mm Fan, PWM, Ball Bearing, L350mm, w/ finger Guard, Middle
 4. 1x 120mm Fan, PWM, Ball Bearing, L650mm, w/ finger Guard, Rear
 5. 3x 120mm Fan Holder, Green
 6. 6x 5.25" Device Rail, w/ holder Box
 7. 1x 3.5" Exposed Device Holder, Metal
 8. 4x Foot Stand, Black
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Intrusion Switch Cable, 2P2C, 1100mm
 11. 1x Cable SW. (Power, Reset, Alarm mute), 1100mm
 12. 1x Cable, LED Display, 1100mm
 13. 1x PS/2 PSU Mounting Bracket
 14. 1x EMI Liner for PCI Slot Window
 15. 1x 1200W, 1+1, Redundant CRPS PSU
 16. 1x Single Packing Carton with Chenbro Logo+ Paper Pallet

PRODUCT DESCRIPTION

Order code: SR10769-C8+-R800 (SR10769-0030B0)

- Includes:**
1. 1x SR10769 Front Bezel, Black
 2. 2x 4-bay Cage, 3.5", Non Hot-swap
 3. 2x 120mm Fan, PWM, Ball Bearing, L350mm, w/ finger Guard, Middle
 4. 1x 120mm Fan, PWM, Ball Bearing, L650mm, w/ finger Guard, Rear
 5. 3x 120mm Fan Holder, Green
 6. 6x 5.25" Device Rail, w/ holder box
 7. 1x 3.5" Exposed Device Holder, Metal
 8. 4x Foot Stand, Black
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Intrusion Switch Cable, 2P2C, 1100mm
 11. 1x Cable SW. (Power, Reset, Alarm mute), 1100mm
 12. 1x Cable, LED Display, 1100mm
 13. 1x PS/2 PSU Mounting Bracket
 14. 1x EMI Liner for PCI Slot Window
 15. 1x 800W, 1+1, Redundant CRPS PSU
 16. 1x Single Packing Carton with Chenbro Logo+ Paper Pallet

PRODUCT DESCRIPTION



Model	SR11308M3RPJ (SR11369H01*15554)
Dimension (D x W x H)	680.0 x 438.0 x 175.0 (mm); 26.77" x17.24" x6.89"
M/B Form Factor	Proprietary (15.12" x 13.2"): SMC X11DGP-QT/X11DPX-T Proprietary (14.23" x 13.24"): Tyan S7105 SSI EEB (12"x 13"): 8-slot SKU Only
Drive Bay	External: 2 x 5.25" and 1 x 3.5" Hot-Swap: 2 x 4-Bay 3.5" SAS/SATA HDD Module
Storage Backplane	12Gb/s, Mini SAS HD Connector
PSU Form Factor	Redundant CRPS 1+1,2000W (80+ Platinum) Single PSU (PS/2 form factor) for 8-slot/EEB SKU only
Indicators	1 x Power Status, 1 x HDD Activity, 2x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fans	Middle (Default): 4 x 80 (mm), PWM, 11000 RPM, Hot-Swap Rear CPU Fan Module for Internal: 2 x 80 (mm), PWM, 8200 RPM, Fixed (Option) Rear GPU Hot-swap Fan for External: 2 x 80 (mm), PWM, 11000 RPM, Hot-swap (Option)
System Security	Intrusion Switch (Option); Key Lock on Front Bezel (Option)
Expansion Slot	11 x Full Height and Full Length (Up to Double Width 5-GPU Support)
Rack Mount Kit (Optional)	- Rackmount Ear Handle - Slide Rail Kit with CMA Support: Works for 438 mm Width Rack Chassis, P2P: 26" to 36.7", Traveling Distance 28.5", Maximum Load Weight: 59KG, Tool-less
Options	Description
SK32801M3	SK, 2.5" 8BAY, SK32801, w/ 2.5" HDD Tray+Fan Holder
384-RAL00001BA0	Rail, Travel: 724.4mm, Chassis w/ 438mm, Tool-less, BUL, SR11369
384-FAN000003BA0	Fan AS'Y, Bulk, REV.A, CPU Fan
384-11311-2100A0	Fan Module, For GPU, SR11369
384-MEC000327BA0	Bracket, Cabinet Ear+Handle, Bulk, SR11369
384-PCB00034B0A0	Option Part: 8 Bay 2.5" NVMe Gen 3 Hot Swap Upgrade Kit (Fit 2x 5 1/4)
384-PCB00033B0A0	Option Part: Tri-mode 4+8 Gen3 2.5" HDD CAGE BP, Bulk, 2X5.25", Tool-less, N4, w/ o Fan, SR113

PRODUCT DESCRIPTION



Model SR11569-0030A0	
Dimension (D x W x H)	581.9 x 175.0 x 438.0 (mm); 23" x 6.89" x 17.24" (without Bezel)
M/B Form Factor	EEB (12" x 13"); ATX (12" x 9.6")
Drive Bay	External: 2 x 5.25" and 1 x 3.5" Internal: 4 x 3.5"
PSU Form Factor	Support ATX & CRPS (1+1)
Front Panel Controller	Support Loose-Pin, SSI, MiniSSI
Indicators	1 x Power Status, 1 x HDD Activity, 2x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fans	1 x 80x25 (mm) for HDD/CPU 1 x 120x25 (mm) for GPU/PCIe Card
System Security	Key Lock Bezel
GPU Bracket	Support RTX2080, RTX3080
Expansion Slot	8 x Full Height and Full Length
Model SR11569-0040B0	
Dimensions (D x W x H)	581.9 x 175.0 x 438.0 (mm) ; 23" x 6.89" x 17.24" (without Bezel)
M/B Form Factor	EEB (12" x 13") ; ATX (12" x 9.6")
Drive Bay	External: 2 x 5.25" and 1 x 3.5" Internal: 4 x 3.5"
PSU Form Factor	Support ATX & CRPS (1+1)
Front Panel Controller	Support Loose-Pin, SSI, MiniSSI
Indicators	1 x Power Status, 1 x HDD Activity, 2x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fans	1 x 80x25 (mm) for HDD/CPU 1 x 120x25 (mm) for GPU/PCIe Card
System Security	Key Lock Bezel
GPU Bracket	Support RTX2080, RTX3080
Expansion Slot	8 x Full Height and Full Length

|SR115

Options	Description
384-RAL00001BA0	Rail, Travel: 724.4MM, Chassis w/ 438MM, Tool-Less, BUL, SR11369
384-FAN000003BA0	Fan AS'Y, Bulk, REV.A, CPU Fan
384-11311-2100A0	Fan Module, For GPU, SR11369
384-FAN00296SOA0	Liquid Module, SR1156901, Fan Module, Single, Alphacool 120MM

PRODUCT DESCRIPTION**Order code: SR20969-C4+ (SR20969H11*14542)**

- Includes:**
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x Single Packing Carton w/ Chenbro Logo

Order code: SR20969-C4+-R800 (SR20969-0010B0)

- Includes:**
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder Box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, Bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x 800W, 1+1, Redundant CRPS PSU
 17. 1x Single Packing Carton w/ Chenbro Logo

PRODUCT DESCRIPTION**Order code: SR20969-C4+-400 (SR20969-0020B0)**

- Includes:**
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder Box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, Bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x 400W, Single ATX PSU
 17. 1x Single Packing Carton w/ Chenbro Logo

Order code: SR20969-C4+-R1200 (SR20969-0030B0)

- Includes:**
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder Box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, Bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x 1200W, 1+1, Redundant CRPS PSU
 17. 1x Single Packing Carton w/ Chenbro Logo

PRODUCT DESCRIPTION



Order code: SR30169T3FP3U1 (SR30169H01*15676)

- Includes:**
1. 1x SR30169 Front Bezel, Silver& Black
 2. 1 x 120mm Fan, T=25mm, PWM, 1450RPM, L300mm
 3. 1 x 120mm Fan Holder, Blue
 4. 1 x Air Duct for Cage Fan
 5. 4 x 3.5" Non Tool-less HDD Trays
 6. 1 x 12Gbps SAS&SATA Backplane
 7. 2 x 2.5" Internal HDD Brackets
 8. 1 x Display Cable, SW/LED/FAIL, PWR/HDD /FAIL LED:Blue/Blue/Red, 500mm
 9. 1 x Intrusion Switch w/ 600mm 2-wire Cable
 10. 1 x Internal PSU Adapter Cord, 150/100mm
 11. 1 x 2-port USB 3.0 Cable, 510mm
 12. 1 x Single 300W PSU
 13. 1 x Single Packing Carton (Brown Box)

Model	SR30169-0010A0
M/B Form Factor	Mini-ITX (6.7" x 6.7")
Dimension (D x W x H)	310.0 x 200.0 x 270.0 (mm); 12.20" x 7.87" x 10.63" (w/o bezel)
Drive Bays	- internal 2.5" : 2/ internal 3.5" (Option) : 4 - 3.5" hot-swap : 4
Storage Backplane	3.5" 4-port 12Gbps, SAS/SATA
PSU Form Factor	PS/2 single 300W w/120 mm fan
Indicators	1 x power status, 1 x HDD status, 1 x system alarm
Front Controls	1 x power On/Off, 1 x system Reset, 2 x USB2.0/USB 3.0 (Option)
Cooling Fans	Front: 120 x 25 (1)
System Security	Intrusion Switch, Key Lock, Padlock Loop, Kensington Slot
Expansion Slot	1 x Low Profile
Net Weight	5.2 kg
Gross Weight	7.0 kg
Container Load	40' H: 1284 (single packing)



CHENBRO