



| 2024

PRODUCT LIST

CHENBRO

CONTENTS



01 PART NUMBERS

Rackmount Chassis	04
Tower Chassis	05
Barebones Servers	06
Storage Kits & Accessories	07

02 BILLS OF MATERIAL

Rackmount Chassis

RM13304	10
RM13310	12
RM14300	13
RM14604	14
RM23804	15
RM23808	16
RM23812	17
RM23824(NVME)	18
RM241	21
RM242	24
RM24504	26
RM24508_12	28
RM252	30
RM252 (MIO)	31
RM253	32
RM31616	33
RM352	34
RM413	35
RM41824	38
RM43736	39
RM43348	40
RM42200	41
RM423	42

JBOD Storage Chassis

DS252	44
DL252	45

Barebone Server Products

RB146	46
RB138	47
RB151FCP	48
RB237	49
RB245	50
RB251CYP	51
RB251FCP	53
TB115	55

Tower Chassis

SR10569	57
SR10769	59
SR113	61
SR115	62
SR20969	63
SR30169	65

Rackmount Chassis

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
RM133	RM13304T3FP8MR	RM1330403-0010A0	
RM133	RM13304T3FP5	RM13304H01*14530	
RM133	RM13304T3RP6	RM13304H01*14529	
RM143	RM14302T3FP5SR	RM1430201-01*912659	Windows users: RIO
RM146	RM14604T3FP4+	RM14604-0040B0	Alternative RM14604H20*14668
RM146	RM14604T3-R350+	RM14604-0100C0	
RM238	RM23812E3RP8	RM23812H01*15457	
RM238	RM23808M3RP8U5	RM23808H03*15127	
RM238	RM238N4T20-RC00L	RM23824-0060C0	
RM238	RM23808M3RPGC1	RM23808H03*15778	
RM241	RM24100-L2U3	RM24100-0080C0	
RM241	RM24100-LU3	RM24100-0110C0	
RM241	RM24100FP8	RM24100-0170C0	
RM241	RM24100FP5	RM24100-0130C0	
RM241	RM24100-S400L2U3	RM24100-0120C0	
RM241	RM24100-S600L2U3	RM24100-0060C0	
RM245	RM24508M3FP5	RM24508H02*15946	
RM245	RM24508M3RP5	RM24508H02*15167	Alternative RM24508H02*15964 (Acbel)
RM245	RM24512E3RP5	RM24512H03*14461	
RM245	RM24504T3RP8G1	RM24504H03*15792	
RM252	RM25204T3RP8	RM25204H01*15669	
RM253	22-300012-003000	22-300012-003000	RM25324 will change to MP PN later.
RM316	RM31616-0020F0	RM31616-0020F0	
RM352	RM35206T3RPF	RM35206H01*15671	
RM352	RM35206T3RPFU2	RM35206-0040A0	
RM413	RM41300-F1U3	RM41300-0080E0	
RM413	RM41300-FS81U3	RM41300H12*13729	
RM413	RM41300-0120E0	RM41300-0120E0	
RM413	RM41300-0030E0	RM41300-0030E0	PN on website: RM41300G
RM418	RM41824-0040G0	RM41824-0040G0	
RM422	RM42200-1U3	RM42200H13*13814	
RM423	RM42300-F1U3	RM42300H11*13739	
RM437	RM43736E3RPCU1	RM43736-0010A0	
RM438	RM43348-0010C0	RM43348-0010C0	

Tower Chassis

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
SR105+	SR10569-C4+	SR10569H09*14541	
SR105+	SR10569-C4+-R800	SR10569-0040A0	
SR105+	SR10569-C4+-R1200	SR10569-0020A0	
SR107+	SR10769-C8+	SR10769H09*14584	
SR107+	SR10769-C8+-R800	SR10769-0030B0	
SR107+	SR10769-C8+-R1200	SR10769-0040B0	
SR113	SR11308M3RPJ	SR11369H01*15554	
SR209+	SR20969-C4+	SR20969H11*14542	
SR209+	SR20969-C4+-400	SR20969-0020B0	
SR209+	SR20969-C4+-R800	SR20969-0010B0	
SR209+	SR20969-C4+-R1200	SR20969-0030B0	
SR301	SR30169T3FP3U1	SR30169H01*15676	
SR115	SR11569-0030A0	SR11569-0030A0	SR11569-0030A0 = SR1156901-0040A0 + 384-BEZ000001BA0

Barebone Server Products

PRODUCT	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
RB146	RB1460401-0010A0	RB1460401-0010A0	
RB138	RB13804N4WFTU1	RB13804H01*15121	
RB237	RB23708M3WFTU2	RB23724H01*15064	
RB151	RB15112N4RCPU1	RB1511202-002000	
RB251	RB25112E3RPJSTD	RB2511202-01*899509	
RB251	RB25112N4R2100U1	RB2511203-002000	
RB251	RB25112N4RPJSTD	RB2511201-01*899507	
TB115	TB1156901-0010A0	TB1156901-0010A0	
RB245	RB24508M3FP5D4U	RB24508-0010A0	

Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
Bezel	384-14605-3100A0	384-14605-3100A0	Bezel, BKCC1012/BKCC1012, RM133/RM146
Bezel	84H341310-005	84H341310-005	Bezel, Two Doors, RM413/423
Bezel	88H321500-001	88H321500-001	Bezel, Plastic Panel, BKCC1012
Bezel	384-23705-3107B0	384-23705-3107B0	Bezel, Front w/ Key-lock, Black, RM237/238
Bezel	84H341310-004	84H341310-004	Bezel, One Door, RM413/423
Cabinet Ear	384-MEC000327BA0	384-MEC000327BA0	Bracket, Cabinet Ear+Handle, Bulk SR11369
Cable	84H314310-004	84H314310-004	Cable, USB 3.0, RM14300 w/ bracket
Cable	84H342310-012	84H342310-012	Cable, w/ PCB 80H02342301A0, USB 3.0
Fan	384-FAN000003BA0	384-FAN000003BA0	Fan AS'Y, Bulk, REV.A, CPU Fan
Fan	384-11311-2100A0	384-11311-2100A0	Fan Module, for GPU, SR11369
Fan	30H080032-101	84H324210-004	Fan, 8032+L300, 4400RPM, Ball, YS
Fan	84H331610-047	84H331610-047	Fan, 80*T25MM, L300MM, Ball, 4500RPM, 4P4C, SUNON
Fan	384-24211-3200A0	384-24211-3200A0	Fan, Mix, 4CM Fan (NMB), RM24200
Foot Stand	84H342210-002	84H342210-002	Foot Stand, BK, RM422/RM413/RM423
HDD Holder	84H314310-007	84H314310-007	Bracket, HDD Bracket, 3.5"+2.5" HDD Bracket Tool-Less
HDD Holder	84H314310-008	84H314310-008	Bracket, HDD Holder, Tool-Less 2.5 HDD Bracket 3.5 TO2.5
HDD Holder	84H314910-092	84H314910-092	Bracket, Non Tool-Less HDD Bracket, 1X3.5"+1X2.5", RM14300
HDD Holder	84H321410-009	84H321410-009	Bracket, Combo Kit, SLIMFDD/CD, NO PCB ADAP&Cables&Screw, RM
HDD Holder	84H331610-024	84H331610-024	Bracket, 2.5" (2pcs), RM31616
HDD Module	384-MIX000098SA0	384-MIX000098SA0	SK, HDD, 2Port HDD Cage Module/Cable/SAS/SATA BP, RM35206
HDD Module	384-MIX000132BA0	384-MIX000132BA0	SK, 2Port HDD Cage Module/Cable/NVME Gen3, RM35206
HDD Module	384-10501-2102A0	384-10501-2102A0	HDD Module, 3.5HDD, 4-Port 12G SAS&SATA BP, TL TRAY, SR105/209
HDD Module	384-23701-3116B0	384-23701-3116B0	HDD Cage, 2-bay 2.5 w/ 12Gbps SAS&SATA Backplane, 2* 650mm SATAIII Cable
HDD Module	384-10701-2100A0	384-10701-2100A0	HDD Module, 3.5"Hot-swap, 4-PORT 12G Mini-SAS HD BP, SR10769+
HDD Module	384-23801-3103A0	384-23801-3103A0	HDD Cage 2.5" 2-bay, Hot-swap, w/ 2-port NVME Backplane and Mylar Air Duct (Note 2)
HDD Tray	384-14602-3119B0	384-14602-3119B0	Tray, HDD 2.5"Tray (Tool-Less)
HDD Tray	84H313110-022	84H313110-022	Tray, HDD Tray, 2.5"TRAY (SPTE Material)
HDD Tray	384-14602-3123A0	384-14602-3123A0	Tray, Mix, 3.5"HDD Tray (#383-14655-3039A0) Tool-Less, RM14604
HDD Tray	83H555512-001	83H555512-001	Tray, 2.5" HDD Tray of SK51201
HDD Tray	384-TRY00014B0A0	384-TRY00014B0A0	3.5" HDD Tray, Bulk, (#383-14655-3039B0) Tool-Less, 50PCS/CTN

Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
MB I/O	84H313210-018	84H313210-018	I/O Gasket (w/ squar Ehole)
MB I/O	84H313610-058	84H313610-058	I/O, Gasket"X11SSV-Q", RM13604
PSU	132-41200-0700A1	132-41200-0700A1	PSM, Module, 1200W, R1CA2122A, for FSF050-00AG
PSU	32H1080001101	32H1080001101	PSM, Single, 800W ,R1CA2801A(FSE052-000G) EN62368, ACBEL, RM237
PSU Bracket	84H210510-019	84H210510-019	Bracket, PSU, ACBEL R2IS Series, SR
PSU Bracket	84H210710-103	84H210710-103	Bracket, PSU, AcBelR2ISeries, SR107
Rail	384-RAL000005SA0	384-RAL000005SA0	Rail, Travel:715MM, Chassis w/ 438MM Tool-Less, A6612878, RM25324
Rail	384-15103-3301A0	384-15103-3301A0	Rail, Travel:820MM, Chasis w/ 438.5MM Tool-Less, Non-Auto Lock
Rail	384-RAL00001BA0	384-RAL00001BA0	Rail, Travel:724.4MM, Chasis w/ 438MM Tool-Less, BUL, SR11369
Rail	384-25203-3301A0	384-25203-3301A0	Rail, Slide, 2U, Travel:480MM, Chassis w/ 438MM, Tool-Less, RM252/352
Rail	84H314510-003	84H314510-003	Rail, 26", Slim Type, for RM14500
Rail	84H342310-001	84H342310-001	Rail, 20", RM413/423/RM422, Non Tool-Less
Rail	84H210710-024	84H210710-024	Rail, 23", SR105/107/112/209
Rail	384-23803-3300D0	384-23803-3300D0	Rail, Slide Rail, Tool-Less, 3 Section 3A5612784, RM238
Rail	384-14303-3102A0	384-14303-3102A0	Rail, Simple Rail Long RM143/146/133/238/245 (MPQ=8)
Rail	84H341300-002	84H341300-002	Rail, Kingslide 21.9" (2PCS/SET), 2U-4U
Rail	84H323610-034	84H323610-034	Rail, 26", Tool-Less, 2U-4U, 3A61-661 w/ Platex4, Tool-Less
Rail	84H314610-003	84H314610-003	Rail, Ball Bearing, 2-Section, Tool-Less 23
Riser	384-PCB000019BA0	384-PCB000019BA0	Kit, RM25206, Riser (62368), w/ Rear Window/Riser Card X16, 12PCS/CTN
Riser	84H314310-005	84H314310-005	Riser Set, PCI-E 8X w/ bracket, RM145/RM14300
Riser	84H314310-006	84H314310-006	Riser SEt, RM14300, FOR PCI-E 16X w/ bracket
Riser	80H09323701A2	80H09323701A2	Riser, TWOX16&ONEX8, w/ anti-staticbag
Riser	84H314610-023	84H314610-023	Riser Card, X16, RM14604, w/ bracket
Riser	383-30000-3638A0	383-30000-3638A0	Riser Module, RM13310, Riser BKT w/ Riser Board (Gen4)
Riser	384-PCB00066B0A0	384-PCB00066B0A0	2U Riser Card PCIe Gen4 x16 Bulk for RM238/RM245/RM252
Riser Bracket	384-23812-3102A0	384-23812-3102A0	Bracket, Rear Window (FH), Riser BKT+Screw Ttpe, 3-SLOT, RM238
Riser Bracket	84H323610-006	84H323610-006	Bracket, Rear Window, STD RW with 3-full Height PCI, RM241/RM23
Riser Bracket	88H321400-001	88H321400-001	Bracket, Rear Window, STD RW w/ riser BKT, Stand off+Screws, RM

Storage Kits & Accessories

TYPE	OLD ORDER NUMBER	NEW ORDER NUMBER	NOTE
SK	SK41203	SK41203H01*11225	SK, HDD Tray, Internal, 1X3.5"HDD/FDD to 2X2.5"HDD Bays
SK	SK31101T3	SK31101H04*13897	SK, 12G, 5.25"to 1x Hot-swap 3.5"HDD Bay
SK	SK51102T3	SK51102H01*14620	SK, 1x2.5"HDD Bay in Slim ODD Cage w/12Gb/s SATA BP
SK	SK41101-BK-H	SK41101H01*10879	SK, HDD Tray, Internal, 1X5.25" to 3.5"HDD/FDD Bay, BK
SK	SK41202	SK41202H01*10881	SK, 1X5.25 (Internal) to 1XSlim ODD+Internal 3.5 HDD/FDD Bay
SK	SK33502T3	SK33502H08*13709	SK, 5-IN-3,3XODD Bays to 5X3.5"HDD Bays (12gSATAII/SAS)
SK	SK51201T3	SK51201H01*14555	SK, 1x3.5"to 2x2.5"HDD Bay, w/1 2Gb/SATA BP
SK	SK32303T3	SK32303H06*13651	SK, 3-in-2, HDD Module, SATA/SAS, 12G, BK, Single Pack
SK	384-23702-3100A0	384-23702-3100A0	SK, 2.5Drive Bay 2-Drive, NVME, Rear
SK	SK32801M3	SK32801H01*15188	SK, 2.5" 8Bay, SK32801 w/ 2.5" HDD Tray+Fan Holder
Rail	384-RAL00015S0A0	384-RAL00015S0A0	Rail, Slide Rail, Travel:560MM, Chassis w/ 438MM, Tool-Less, Martas, Single
Bezel	384-23705-3106B0	384-23705-3106B0	Bezel, 2U Metal w/ o Key-lock, Black
Bezel	88H331200-001	88H331200-001	Bezel, BK, RM311/312/313/314
Holder	84H342910-012	84H342910-012	ODD Cage Kit, for Tower Application RM413/RM423
HDD Module	384-PCB00034B0A0	384-PCB00034B0A0	SR113 Option Part: 8-bay 2.5" NVMe Gen 3 Hot Swap Upgrade Kit (Fit 2x 5 1/4)
HDD Module	384-PCB00033B0A0	384-PCB00033B0A0	SR113 Option Part: Tri-mode 4+8 Gen3 2.5" HDD Cage BP, Bulk, 2X5.25", Tool-Less, N4, w/o
CMA	84H349010-006	84H349010-006	CMA, Cable Management ARM 2BA7-362FAZ0SE, RM437
Liquid Module	384-FAN00296S0A0	384-FAN00296S0A0	Liquid Module, SR1156901, Fan Module Single, Alphacool 120mm

PRODUCT DESCRIPTION



• RM13304T3RP6



• RM13304T3FP8MRG0



• RM13304T3FP5

Order Code: **RM13304T3FP5 (RM13304H01*14530)**

- Includes:
- 1 x Cabinet Mounting Handle, 2pcs/set
 - 4 x 3.5" HDD Tray, Tool-Less
 - 1 x 4-port 12Gb/s SATA & SAS Backplane, For 3.5" HDD
 - 4 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 - 1 x PSU, 500W, Single, w/ bracket
 - 1 x LED Board
 - 1 x Cable, Display, 900mm, Discrete Pins
 - 1 x Cable, Display, 900mm, for Supermicro Motherboard, (Accessory)
 - 1 x Cable, USB 3.0, 750mm
 - 1 x Dummy Cover for Slim ODD Bay
 - 1 x Dummy Cover for PCI-e Slot Opening (w/o Riser Bracket)
 - 2 x 2.5" HDD Holder, Blue
 - Single Packing Carton, w/ Chenbro Logo

Order Code: **RM13304T3RP6 (RM13304H01*14529)**

- Includes:
- 1 x Cabinet Mounting Handle, 2pcs/set
 - 4 x 3.5" HDD Tray, Tool-Less
 - 1 x 4-port 12Gb/s SATA & SAS Backplane, For 3.5" HDD
 - 4 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 - 1 x PSU, 650W, 1+1 Redundant, w/ bracket
 - 1 x LED Board
 - 1 x Cable, Display, for Supermicro M/B, 900mm (Accessory)
 - 1 x Cable, Display, 900mm, Discrete Pins
 - 1 x Cable, USB 3.0, 750mm
 - 1 x Dummy Cover for Slim ODD Bay
 - 1 x Dummy Cover for PCI-e Slot Opening (w/o Riser Bracket)
 - 2 x 2.5" HDD Holder, Blue
 - Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION**Order Code: *RM13304T3FP8MR (RM1330403-0010A0)***

- Includes:
1. 1 x Cabinet Mounting Handle, 2pcs/set
 2. 4 x 3.5" HDD Tray, Tool-Less
 3. 1 x 4-port 12Gb/s SATA & SAS Backplane, For 3.5" HDD
 4. 6 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 5. 1 x PSU, 800W, Single, w/ bracket
 6. 1 x LED Board
 7. 1 x Cable, Display, 900mm, Discrete Pins
 8. 1 x Cable, Display, 900mm, for Supermicro Motherboard (Accessory)
 9. 1 x Cable, USB 3.0, 750mm
 10. 1 x Dummy Cover for Slim ODD Bay
 11. 2 x Riser Card (Gen x16)
 12. 2 x 2.5" HDD Holder, Blue
 13. Single Packing Carton, w/ Chenbro Logo

Order Code: *RM13310M3RP6 (RM13310H01*14528)*

- Includes:
1. 1 x Cabinet Mounting Handle, 2pcs/set
 2. 10 x 2.5" HDD/SSD Tray, Tool-Less
 3. 1 x 10-port 12Gb/s mini-SAS HD, For 2.5" HDD/SSD
 4. 5 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 5. 1 x PSU, 650W, 1+1 Redundant, w/Bracket
 6. 1 x LED Board
 7. 1 x Cable, Display, for Supermicro Motherboard, 900mm (Accessory)
 8. 1 x Cable, Display, 900mm, Discrete Pins
 9. 1 x Cable, USB 3.0, 750mm
 10. 1 x Dummy Cover for PCI-e Slot Opening (w/o Riser Bracket)
 11. Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION



Order Code: RM13310M3RP6 (RM13310H01*14528)

- Includes:
1. 1 x Cabinet Mounting Handle, 2pcs/set
 2. 10 x 2.5" HDD/SSD Tray, Tool-Less
 3. 1 x 10-port 12Gb/s Mini-SAS HD, For 2.5" HDD/SSD
 4. 5 x 40mm Fan, PWM, T28, Ball Bearing, L500mm
 5. 1 x PSU, 650W, 1+1 Redundant, w/ bracket
 6. 1 x LED Board
 7. 1 x Cable, Display, for Supermicro M/B, 900mm (Accessory)
 8. 1 x Cable, Display, 900mm, Discrete pins
 9. 1 x Cable, USB 3.0, 750mm
 10. 1 x Dummy Cover for PCI-e Slot Opening (w/o Riser Bracket)
 11. Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION



• RM14300S1FP2



• RM14300FP2 Inside



• RM14302T3FP5SR (RIO)



• RM14302T3FP5SRU1 (FIO)



Order code: **RM14300S1FP2 (RM14300H04*14913)**

- Includes:
- 1 x LED Board
 - 1 x Display Cable, 800mm
 - 1 x Internal Tool-less HDD Holder (1 x 3.5" HDD + 1 x 2.5" HDD)
 - 1 x Tool-less Top Cover
 - 1 x USB 3.0 Cable, 2-port, 750mm, w/ mounting Bracket
 - 3 x 40mm Fan (NMB), T28, PWM, Ball Bearing, L150mm
 - 1 x L-shaped Rack Mounting Bracket, w/ thumb Screw, 2pcs/set
 - 1 x Single Packing Carton, w/ Chenbro Logo
 - PSU, 200W, Full Range

Order code: **RM14302T3FP5SR (RIO) (RM1430201-01*912659)**

- Includes:
- Support Update to ATX, 1 x LED Board ,1 x Rear I/O
 - 1 x Display Cable
 - 2 x Hotswap Tool-less HDD (2 x 2.5" HDD)
 - 1 x Tool-less Top Cover
 - 1 x USB 3.0 Cable, 2-port
 - 4 x 40mm Fix Fan, Dual Rotor 22500/20500
 - 1 x PCIe x16 Riser Card, Support Full Height & Half Length
 - 1 x Single Packing Carton, w/ Chenbro logo
 - PSU, 500W, Full Range

Order code: **RM14302T3FP5SRU1 (FIO) (RM1430201-02*912657)**

- Includes:
- Support Update to ATX, 1 x LED Board ,1 x FIO I/O
 - 1 x Display Cable
 - 2 x Hotswap Tool-less HDD (2 x 2.5" HDD)
 - 1 x Tool-less Top Cover
 - 1 x USB 3.0 Cable, 2-port
 - 4 x 40mm Fix Fan, Dual Rotor 22500/20500
 - 1 x PCIe x16 Riser Card, Support Full Height & Half Length
 - 1 x Single Packing Carton, w/ Chenbro logo
 - PSU, 500W, Full Range

PRODUCT DESCRIPTION



• RM14604T3FP4



• RM14604T3-R350+



Order code: **RM14604T3FP4+ (RM14604-0040B0)**

- Includes:
1. 4 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 4-port 12Gb/s SATA & SAS Backplane
 3. 3 x Fan, 40mm, T28, PWM, Ball Bearing, L500mm
 4. 2 x Fan Dummy Cover, For Air Flow Management
 5. 1 x LED Board
 6. 1 x Display Cable, Discrete, 800mm
 7. 2 x 2.5" HDD Holder, Internal, Tool-less
 8. 1 x USB 3.0 Cable, 2-port, w/ Bracket
 9. 1 x Top Cover, Rear, Tool-less
 10. 1 x Top Cover, Front, Screw
 11. 1 x PCI Dummy Cover, for Slot Opening
 12. 2 x L-shape Rack Ear with Thumb Screw
 13. PSU, 400W, w/ Active PFC, 80+ Gold,
 14. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: **RM14604T3-R350+ (RM14604-0100C0)**

- Includes:
1. 4 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 4-port 12Gbps SATA & SAS Backplane
 3. 3 x Fan, 40mm, T28, PWM, Ball Bearing, L500mm
 4. 5 x Fan Dummy Cover, Black, for Air Flow Management
 5. 1 x LED Board
 6. 1 x Display LED& Switch Cable (Discrete Pin), 900mm
 7. 2 x 2.5" HDD Holder, Internal, Tool-less, Blue
 8. 1 x USB 3.0 Cable, 2-port, 20P to Type A, 750mm
 9. 1 x Top Cover, Rear, Tool-less
 10. 1 x Top Cover, Front, Screw
 11. 1 x PCI Dummy Cover, for Slot Opening
 12. 1 x Cabinet Mounting Handle Set (2pcs/set), Left and Right, Black/Blue
 13. PSU, 350W, 1+1 Redundant, 80+ Gold,
 14. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION



Order code: RM23804T3RP5 (RM23804H01*15507)

- Includes:
1. 2 x 5.25" Open Bay Support
 2. 1 x 4-port 12Gb/s Mini-SAS HD Backplane, Passive
 3. 1 x LED Board, w/ USB 3.0
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P(SSI) to 10P*2 (Female), 500mm, For Supermicro M/B
 6. 1 x Fan Bar, Middle, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing
 8. 2 x Fan Cover, For Air flow Management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 1 x LP Window for Single 2U PSU
 15. PSU, 1+1 Redundant, 550W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION



• RM23808M3FP7U1



• RM23808M3RP8U5



Order code: RM23808M3RP8U5 (RM23808H03*15127)

- Includes:
1. 8 X 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro M/B)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ Fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 1 x Fan Dummy Cover, For Air Flow Management
 10. 1 x Low Profile Rear Window, 7-slot
 11. 1 x Dummy Cover, For Rear 2-bay 2.5" HDD Cage Opening
 12. 1+1 CRPS, 800W, Full Range, 80+ Platinum, w/ Mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ Easy-lift Latch
 15. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: RM23808M3RPCG1 (RM23808H03*15778)

- Includes:
1. 8x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro M/B)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ Fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 3 x Full Height Rear Window
 10. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 11. 1 x (1+1) CRPS, 1200W, Full Range, w/ mounting Bracket
 12. 1 x Top Cover, Front, Tool-less
 13. 1 x Top Cover, Rear, w/ Easy-lift Latch
 14. 1x Riser card X 16
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet


PRODUCT DESCRIPTION



• RM23812E3RP8



• RM23812E3RPCMRG1

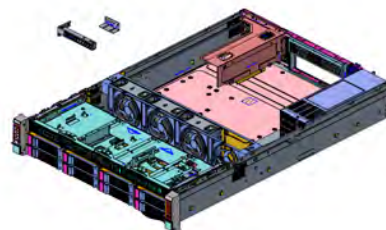

• RM23808M3RPCG1



Order code: **RM23812E3RP8 (RM23812H01*15457)**

- Includes:
1. 12 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 12-port 12Gb/s mini-SAS HD Expander Backplane, Active
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 1 x Fan Dummy Cover, For Air Flow Management
 10. 1 x Low Profile Rear Window (RM23808-103B), 7-slot
 11. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x (1+1) CRPS, 800W, Full Range, w/ mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ easy-lift Latch
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: **RM23812E3RPCMRG1 (RM2381201-01*909629)**

- Includes:
1. Mother Board Form Factor for AMD EPYC 7003/7002 SMC H12SSW-NTR
 2. 12 x 3.5" HDD Tray, Tool-less, Black/Blue
 3. 1 x 12-port 12Gb/s mini-SAS HD Expander Backplane, Active
 4. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 5. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 6. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 7. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 8. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 9. 4 x Fan Extension Cable, 500mm
 10. 4 x Full Height Rear Window+ 3 Low Profile Rear Window
 11. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x (1+1) CRPS, 1200W, Full Range, w/ mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ easy-lift Latch
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

RM23824(NVME)

PRODUCT DESCRIPTION



• RM238N24-RL



• RM238N8T16-RL



• RM238N20T4-RL



• RM238N4T20-RL

Order code: **RM238N24-RC00L (RM23824-0070C0)**

- Includes:
1. 24 x 2.5" HDD Tray, Tool-less, Black/Orange (for NVME Drive Bay)
 2. 3 x 8-port NVME Backplane, 12Gb/s
 3. 1 x Cable, I2C, N8 BP- N8 BP -N8 BP, 160mm/160mm
 4. 1x Cable, I2C, N8 BP (Master Mode) to MB, 800mm
 5. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 6. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 7. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 8. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 9. 4 x Fan Extension Cable, 500mm
 10. 1 x Low Profile Rear Window
 11. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x Top Cover, Front, Tool-less
 13. 1 x Top Cover, Rear, w/ easy-lift Latch
 14. 1 x PSU Bracket, CRPS, Front and Rear
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet
 16. PSU, CRPS, 1200W, Hot-swap, with PDB, with PSU BKT

Order code: **RM238N20T4-RC00L (RM23824-0080C0)**

- Includes:
1. 20 x 2.5" HDD Tray, Screw, Black/Orange (for NVME Drive Bay)
 2. 4 x 2.5" HDD Tray, Screw, Black/Blue
 3. 2 x 8-port NVME Backplane, 12Gb/s
 4. 1 x 8-port 4/8 Tri-mode NVME Backplane, 12Gb/s
 5. 1 x Cable, I2C, N8 BP- N8 BP -N4 BP, 160mm/160mm
 6. 1x Cable, I2C, N8 BP (Master Mode) to MB, 800mm
 7. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 8. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 9. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 10. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 11. 4 x Fan Extension Cable, 500mm
 12. 1 x Low Profile Rear Window
 13. 1 x Dummy Cover, For Rear 2-bay 2.5" HDD Cage Opening
 14. 1 x Top Cover, Front, Tool-less
 15. 1 x Top Cover, Rear, w/ easy-lift Latch
 16. 1 x PSU Bracket, CRPS, Front and Rear
 17. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet
 18. PSU, CRPS, 1200W, Hot-swap, with PDB, With PSU BKT

PRODUCT DESCRIPTION

Order code: RM238N8T16-RC00L (RM23824-0050C0)

- Includes:
1. 8 x 2.5" HDD Tray, Tool-less, Black/Orange (for NVME Drive Bay)
 2. 16 x 2.5" HDD Tray, Tool-less, Black/Blue
 3. 1 x 8-port NVME Backplane, 12Gb/s
 4. 1 x 12Gb/s SAS Expander, 24-port, Daughter Board
 5. 1 x 16-port 12Gb/s mini-SAS HD Backplane, Passive, For 2.5" HDD/SSD
 6. 1x Cable, I2C, N8 BP to 16 Bay SAS/SATA BP, 300mm
 7. 1x Cable, I2C, SAS Expander to MB, 800mm
 8. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 9. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 10. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 11. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 12. 4 x Fan Extension Cable, 500mm
 13. 1 x Low Profile Rear Window
 14. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 15. 1 x Top Cover, Front, Tool-less
 16. 1 x Top Cover, Rear, w/ easy-lift Latch
 17. 1 x PSU Bracket, CRPS, Front and Rear
 18. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet
 19. PSU, CRPS, 1200W, Hot-swap, with PDB, with PSU BK

Order code: RM238N8T16-RC00L (RM23824-0050C0)

- Includes:
1. 8 x 2.5" HDD Tray, Tool-less, Black/Orange (for NVME Drive Bay)
 2. 16 x 2.5" HDD Tray, Tool-less, Black/Blue
 3. 1 x 8-port NVME Backplane, 12Gb/s
 4. 1 x 12Gb/s SAS Expander, 24-port, Daughter Board
 5. 1 x 16-port 12Gb/s mini-SAS HD Backplane, Passive, For 2.5" HDD/SSD
 6. 1x Cable, I2C, N8 BP to 16 Bay SAS/SATA BP, 300mm
 7. 1x Cable, I2C, SAS Expander to MB, 800mm
 8. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 9. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 10. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 11. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 12. 4 x Fan Extension Cable, 500mm
 13. 1 x Low Profile Rear Window
 14. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 15. 1 x Top Cover, Front, Tool-less
 16. 1 x Top Cover, Rear, w/ easy-lift Latch
 17. 1 x PSU Bracket, CRPS, Front and Rear
 18. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet
 19. PSU, CRPS, 1200W, Hot-swap, with PDB, with PSU BK


RM23824(NVME)

PRODUCT DESCRIPTION

Order code: RM238N4T20-RC00L (RM23824-0060C0)

- Includes:
1. 4 x 2.5" HDD Tray, Tool-less, Black/Orange (for NVME Drive Bay)
 2. 20 x 2.5" HDD Tray, Tool-less, Black/Blue
 3. 1 x 8-port 4/8 Tri-mode NVME Backplane, 12Gb/s
 4. 1 x 12Gb/s SAS Expander, 24-port, Daughter Board
 5. 1 x 16-port 12Gb/s mini-SAS HD Backplane, Passive, For 2.5" HDD/SSD
 6. 2 x mini-SAS HD Cable, Backplane to Backplane, 550mm
 7. 1x Cable, I2C, N4 BP to 16 bay SAS/SATA BP, 300mm
 8. 1x Cable, I2C, SAS Expander to MB, 800mm
 9. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 10. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 11. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 12. 4 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 13. 4 x Fan Extension Cable, 500mm
 14. 1 x Low Profile Rear Window
 15. 1 x Dummy Cover, For Rear 2-bay 2.5" HDD Cage Opening
 16. 1 x Top Cover, Front, Tool-less
 17. 1 x Top Cover, Rear, w/ easy-lift Latch
 18. 1 x PSU Bracket, CRPS, Front and Rear
 19. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet
 20. PSU, CRPS, 1200W, Hot-swap, with PDB, with PSU BKT

PRODUCT DESCRIPTION

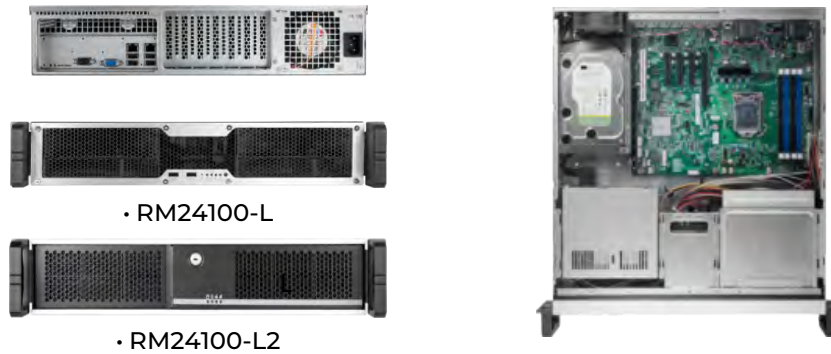

Order Code: RM24100-L (RM24100H01*15651)

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x Aluminum Front Plate, Decoration Strip
 9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 10. 1 x Low Profile PCI Slots Rear Window
 11. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-L2 (RM24100H01*15650)

- Includes: 2-door Bezel
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x 2-door Front Bezel, Black
 9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101), YS
 10. 1 x Low Profile PCI Slots Rear Window
 11. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-LU3 (RM24100-0110C0)

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 2 x 3.5"
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 9. 1 x Low Profile PCI Slots Rear Window
 10. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM24100-L2U3 (RM24100-0080C0)

Includes: 2-door Bezel

1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
2. 1 x Drive Cage, 2 x 3.5"
3. 1 x 2-bay 2.5" HDD Holder
4. 1 x Front Display and Control Switch Cable, 800mm
5. 1 x USB 3.0 Cable
6. 1 x Mounting Bracket, PS/2 PSU, Rear
7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
8. 1 x 2-Door Front Bezel, Black
9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101), YS
10. 1 x Low Profile PCI Slots Rear Window
11. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-S400L2U3 (RM24100-0120C0)

Includes: 1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"

2. 1 x Drive Cage, 2 x 3.5"
3. 1 x 2-bay 2.5" HDD Holder
4. 1 x Front Display and Control Switch Cable, 800mm
5. 1 x USB 3.0 Cable
6. 1 x Mounting Bracket, PS/2 PSU, Rear
7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
8. 1 x Aluminum Front Plate, Decoration Strip
9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
10. 1 x Low Profile PCI Slots Rear Window
11. 1 x 2-door Front Bezel, Black
12. 1 x 400W Single PSU
13. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100-S600L2U3 (RM24100-0060C0)

Includes: 1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"

2. 1 x Drive Cage, 2 x 3.5"
3. 1 x 2-bay 2.5" HDD Holder
4. 1 x Front Display and Control Switch Cable, 800mm
5. 1 x USB 3.0 Cable
6. 1 x Mounting Bracket, PS/2 PSU, Rear
7. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
8. 1 x Aluminum Front Plate, Decoration Strip
9. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
10. 1 x Low Profile PCI Slots Rear Window
11. 1 x 2-door Front Bezel, Black
12. 1x 600W Single PSU
13. 1 x Single Packing Carton, w/ Chenbro Logo

Order code: RM24100FP8 (RM24100-0170C0)

Includes: 1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"

2. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5" or 1 x Slim ODD
3. 1 x 2-bay 2.5" HDD Holder
4. 1 x Front Display and Control Switch Cable, 800mm
5. 1 x USB 3.0 Cable
6. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
7. 1 x Aluminum Front Plate, Decoration Strip
8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
9. 1 x Low Profile PCI Slots Rear Window
10. 1 x 800W CRPS PSU (1+0)
11. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM24100FP5 (RM24100-0130C0)

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5" or 1 x Slim ODD
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 3.0 Cable
 6. 1 x Power Cable, AC-Inlet, Internal, 100/560mm, Right Angle
 7. 1 x Aluminum Front Plate, Decoration Strip
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm
 9. 1 x Low Profile PCI Slots Rear Window
 10. 1 x 500W Flex PSU
 11. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION



Order code: *RM24200-L (RM24200H01*15649)*

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 1 x 5.25" + 1 x Slim ODD
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x Aluminum Front Plate, Decoration Strip
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101)
 9. 1 x Low Profile PCI slots Rear Window, 4-slot
 10. 1 x Single Packaging Carton, w/ Chenbro Logo

Order code: *RM24200-S400LU3 (RM24200-0030C0)*

- Includes:
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 1 x 5.25" + 1 x Slim ODD
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Brackce, PS/2 PSU, Rear
 7. 1 x Aluminum Front Plate, Decoration Strip
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101)
 9. 1 x Low Profile PCI Slots Rear Window, 4-slot
 10. 1x Single 400W PSU
 11. 1 x Single Packaging Carton, w/ Chenbro Logo

Order code: *RM24200-L2 (RM24200H01*15648)*

- Include: 2-door Bezel
1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
 2. 1 x Drive Cage, 1 x 5.25" + 1 x Slim ODD
 3. 1 x 2-bay 2.5" HDD Holder
 4. 1 x Front Display and Control Switch Cable, 800mm
 5. 1 x USB 2.0 Cable, 750mm
 6. 1 x Mounting Bracket, PS/2 PSU, Rear
 7. 1 x 2-door Front Bezel, Black/Silver
 8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101)
 9. 1 x Low Profile PCI Slots Rear Window, 4-slot
 10. 1 x Single Packaging Carton, w/ Chenbro logo

PRODUCT DESCRIPTION

Order code: RM24200-S400L2 (RM24200-0060C0)


Include: 2-door Bezel

1. 1 x Drive Cage, 1 x 5.25" + 1 x 3.5"
2. 1 x Drive Cage, 1 x 5.25" + 1 x Slim ODD
3. 1 x 2-bay 2.5" HDD Holder
4. 1 x Front Display and Control Switch Cable, 800mm
5. 1 x USB 2.0 Cable, 750mm
6. 1 x Mounting Bracke, PS/2 PSU, Rear
7. 1 x 2-door Front Bezel, Black/Silver
8. 1 x 80mm Fan, 3P3C, T32, Ball Bearing, L300mm (30H080032-101)
9. 1 x Low Profile PCI Slots Rear Window, 4-slot
10. 1 x Single 400W PSU
11. 1 x Single Packaging Carton, w/ Chenbro logo

PRODUCT DESCRIPTION



• RM24504T3RP5/RM24504T3FP5

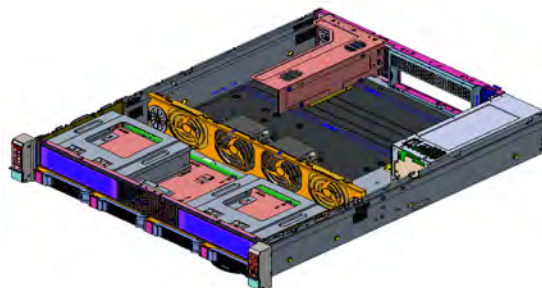

• RM24504T3RP8G1



Order code: **RM24504T3RP5 (RM24504H01*15508)**

- Includes:
1. 2 x 5.25" Open Bay Support
 2. 1 x 4-port to port, 12Gb/s SATA&SAS Backplane
 3. 1 x LED Board, w/ USB
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro Motherboard
 6. 1 x Fan Bar, Middle, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L350mm
 8. 2 x Fan Cover, For Air flow Management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 1 x LP Window for Single 2U PSU
 15. PSU, 1+1 Redundant, 550W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: **RM24504T3FP5 (RM24504H01*15509)**

- Includes:
1. 2 x 5.25" Open Bay Support
 2. 1 x 4-port to Port, 12Gb/s SATA&SAS Backplane
 3. 1 x LED Board, w/USB
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro Motherboard
 6. 1 x Fan Bar, Middle, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L350mm
 8. 2 x Fan Cover, For Air Flow Management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4 x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 1 x LP Window for Single 2U PSU
 15. PSU, Single 550W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION

*Order code: RM24504T3RP8G1 (RM24504H03*15792)*

- Includes:
1. 2 x 5.25" Open Bay support
 2. 1 x 4-port to port, 12Gb/s SATA&SAS Backplane
 3. 1 x LED Board, w/ USB
 4. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 5. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro Motherboard
 6. 1 x Fan Bar, Middle
 7. 2 x 80mm Fan, 11000RPM PWM, T38, Ball Bearing, L70mm
 8. 2 x Fan Cover, For air flow management
 9. 1 x PSU Mounting Bracket, Single
 10. 1 x Front Top Cover, Non Tool-less
 11. 1 x Rear Top Cover, Non Tool-less
 12. 4 x 3.5" HS HDD, SAS/SATA
 13. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 14. 3xFull Height Riser Bracket
 15. PSU, 1+1 Redundant, 800W
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION



• Single PSU Rear Window



• CRPS Rear Window



Order code: **RM24508M3RP5 (RM24508H02*15167 (FSP))**

- Includes:
1. 8 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x PSU, 550W, 1+1 Redundant (CRPS Module), 80+ Platinum, w/ PMBus
 4. 1 x LED Board, w/ USB 3.0*2 (840mm)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro M/B
 7. 1 x Fan Bar, Tool-less, w/ 4 x Hot-swap Fan Bay
 8. 3 x Fan Module, 80mm, PWM, T38, Ball Bearing, L70mm, w/ hot-swap PCBA
 9. 1 x Fan Cover, For Air Flow Management
 10. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 11. 1 x Front Top Cover, Non Tool-less
 12. 1 x Rear Top Cover, Non Tool-less
 13. 1 x Slim ODD Mounting Kit, Black
 14. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 15. 1 x LP Window for CRPS
 16. Single Packing Carton, w/ Chenbro Logo, Pallet

Order code: **RM24508M3FP5 (RM24508H02*15946)**

- Includes:
1. 8 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 8-port 12Gb/s mini-SAS HD Backplane, Passive
 3. 1 x PSU, 500W, Single PSU, 80+ Platinum, w/ PMBus
 4. 1 x LED Board, w/ USB 3.0*2 (840mm)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Display & Switch Cable, 2*12P (SSI) to 10P*2 (Female), 500mm, For Supermicro M/B
 7. 1 x Fan Bar, Tool-less, w/ 4 x Hot-swap Fan Bay
 8. 3 x Fan Module, 80mm, PWM, T38, Ball Bearing, L70mm, w/ hot-swap PCBA
 9. 1 x Fan Cover, For Air Flow Management
 10. 1 x Dummy Cover, for Rear 2-bay 2.5" HDD Cage Opening
 11. 1 x Front Top Cover, Non Tool-less
 12. 1 x Rear Top Cover, Non Tool-less
 13. 1 x Slim ODD Mounting Kit, Black
 14. 2 x 2.5" HDD/SSD Holder, Internal, Blue, Tool-less
 15. 1 x LP Window for CRPS
 16. Single Packing Carton (Brown box)

PRODUCT DESCRIPTION

*Order code: RM24512E3RP5 (RM24512H03*14461)*

- Includes:
1. 12 x 3.5" HDD Tray, Tool-less, Black/Blue
 2. 1 x 12-port 12Gb/ S mini-SAS HD Expander Backplane, Active
 3. 1 x Front LED & USB 3.0*2 Board, Built-in Cabinet Ear
 4. 1 x Extension Cable, Display, 2*12P SSI to 10P*2 Female (For Supermicro Motherboard)
 5. 1 x Display & Switch Cable, 2*12P to 10P*2, 500mm, Discrete Pins
 6. 1 x Fan Cage, 4-bay, for 4 x 80mm Fan, w/ 4*PCBA for Hot-swap, Tool-less
 7. 3 x 80mm Fan, PWM, T38, Ball Bearing, L70mm, Hot-swap, w/ fan Holder
 8. 4 x Fan Extension Cable, 500mm
 9. 1 x Fan Dummy Cover, For Air Flow Management
 10. 1 x Low Profile Rear Window (RM23808-103B), 7-slot
 11. 1 x Dummy Cover, For Rear 2-bay 2.5" HDD Cage Opening
 12. 1 x (1+1) CRPS, 550W, Full Range, w/ mounting Bracket
 13. 1 x Top Cover, Front, Tool-less
 14. 1 x Top Cover, Rear, w/ easy-lift Latch
 15. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION




• Rear I/O




Model RM252 2U Edge Computing Chassis	
Series	RM25204T3RP8 (RM25204H01*15669)/ RM25204N4RP8 (RM25204H01*15867) RIO
M/B Form Factor	SSI EEB (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm) ; 17.72" x 17.24" x 3.43"
Drive Bay	4-Bay 2.5" HDD, Hot-swap, Front 2-Bay 2.5" HDD, Hot-swap, Rear (Option)
Storage Backplane	RM25204T3RP8 (RM25204H01*15669): 2 x 2-port 12Gbps SAS/SATA * 1 x miniSAS-HD & 2 x 7-pin SATA RM25204N4RP8 2x2-port NVME GEN4, 4x SlimSAS
PSU Form Factor	2U Redundant CRPS (1+1), 800W (80+, Platinum)
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0
Cooling Fans	4 x 80mm, PWM, 11000 RPM, Hot-swap
System Security	-
Expansion Slot	7 x Low Profile or 3 x Full Height (Option)
Supported Rack Mount Kit (Options)	- Slide rail kit w/o CMA support (2-Section): Works for 438 mm width rack chassis, P2P: 26" to 33", Traveling Distance: 19, Tool-less - Cable Management Arm (CMA)
Order Number	Description
RM25204N4RP8 (RM25204H01*15867)	RM25204 Rear I/O 2U 4-Bay 2.5" NVMe Gen4 Edge Computing Chassis (800W 1+1)
Options	Description
384-25203-3301A0	Rail, Slide, 2U, Travel: 480MM, Chassis W: 438MM, Tool-less, RM252/352
384-PCB000019BA0	Riser KIT, RM25206, RISER (62368), w/ rear Window w/ riser Card X16, 12Pcs/CTN

RM252 (MIO)

PRODUCT DESCRIPTION

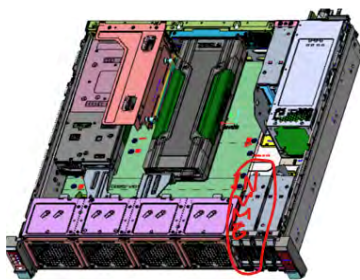

• RM2520401-0010A0

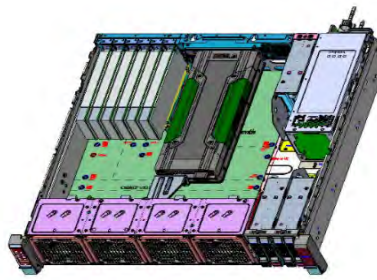

• RM2520401-0020A0

Model		RM252 2U Edge Computing Chassis	
Series	RM2520401-0010A0/ RM2520401-0020A0		
M/B Form Factor	SSI EEB (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")		
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm) ; 17.72" x 17.24" x 3.43"		
Drive Bay	4-Bay 2.5" HDD, Hot-swap, Front 2-Bay 2.5" HDD, Hot-swap, Rear		
Storage Backplane	RM2520401-0010A0/ RM2520401-0020A0 2 x 2-port 12Gbps SAS/ SATA, 1 x 2-port NVME GEN 4		
PSU Form Factor	2U Redundant CRPS (1+1), 1200W		
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm		
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0		
Cooling Fans	4 x 80mm, PWM, 11000 RPM, Hot-swap		
System Security	-		
Expansion Slot	RM2520401-0010A0: 1 x Low Profile +2 x Full Height, RM2520401-0020A0: 6 x Low Profile +1 x Full Height		
Supported Rack Mount Kit (Options)	- Slide Rail Kit w/ o CMA support (2-Section): Works for 438 mm Width Rack Chassis, P2P: 26" to 33", Traveling Distance: 19, Tool-less - Cable Management Arm (CMA)		
Order Number			
RM2520401-0010A0, 2U, 17.7", 6Bay*2.5", NVME GEN 4,SAS/SATA, 4*8038, CRPS (1+1), 1200W, Single+Pallet, 8Pcs/Pallet, RIO, MIO, Support #6.5 Slot MB			
RM2520401-0020A0, 2U, 17.7", 6BAY*2.5", NVME GEN 4,SAS/SATA, 4*8038, CRPS (1+1), 1200W, Single+Pallet, 8Pcs/Pallet, RIO, LP, Support #6.5 Slot MB			
Options		Description	
384-25203-3301A0		Rail, Slide, 2U, Travel: 480MM, Chassis W: 438MM, Tool-less, RM252/352	

PRODUCT DESCRIPTION



Model	RM253
Series	22-300012-003000 2U, 2x USB 3.0, 24x 3.5" SAS/SATA, MiniSAS-HD expander BP, 1200W (1+1) Redundant
M/B Form Factor	SSI EEB (12" x 13")
Dimension (D x W x H)	TBD
Drive Bay	2 x 12-Bay 3.5" HDD, Hot-swap (on Both Side) 1 x 2-Bay 2.5" HDD, Hot-swap, Rear (Option)
Storage Backplane	2 x 12-port 12Gbps SAS Expander 1 x 2-port 12Gbps SAS/SATA or NVMe U.2 (Option)
PSU Form Factor	2U Redundant CRPS (1+1), 1200W (80+, Platinum)
Indicators	1 x Power Status, 1 x UID, 2 x LAN Activity 1 x HDD Status, 2 x HDD Failure, 1 x System Alarm
Front Control	1 x Power on/ off, 1 x UID, 1 x System Reset, 2 x USB 3.0
Cooling Fans	Middle: 6 x 60 mm, PWM, 23000 RPM, Hot-swap
System Security	-
Expansion Slot	7 x Low Profile or 3 x Full Height (Option)
Supported Rack Mount Kit (Options)	- Slide Rail Kit with CMA Support: Works for 438 mm Width Rack Chassis, P2P: 26" to 35", Traveling Distance 28.1", Maximum Load Weight: 59KG, Tool-less - Cable Management Arm (CMA)
Options	
384-RAL000005SA0: Rail, Travel: 715MM, Chassis W 438MM, Tool-Less, A6612878, RM25324	
126-25112-3001A0: Cable, MINI SAS HD TO MINI SAS HD, 800MM, Amphenol, Flat Type	

PRODUCT DESCRIPTION



Order code: RM31616-0020F0

- Includes:
1. M/B Form Factor: SSI EEB (12" x 13")
 2. Exposed: 16 x 3.5" Hot-swap, 1 x Slim ODD, 1 x Slim FDD
 3. 12Gb/s mini-SAS HD w/ expander
 4. Middle: 4 x 80mm (T=38mm), Hot swap
 5. 7 x Full Height and Full Length
 6. 1 x Power On/Off, 1 x Alarm Mute, 1 x System Reset, 2 x USB 3.0
 7. 1 x Power Status, 1 x HDD Activity, 1 x LAN Activity, 1 x Fan Failure & Overheat
 8. 1+1 CRPS, 1200W
 9. 1 x Single Packing Carton, w/ Chenbro Logo, Pallet

PRODUCT DESCRIPTION



• Front I/O



• Rear I/O

Model	RM35206 FIO, RM35206 RIO
Series	22-300012-003000 2U, 2x USB 3.0, 24x 3.5" SAS/SATA, MiniSAS-HD expander BP, 1200W (1+1) Redundant
M/B Form Factor	SSI EEB (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
Dimension (D x W x H)	450.0 x 438.0 x 131.0 (mm); 17.72" x 17.24" x 5.16"
Drive Bay	6-Bay 2.5" HDD, Hot-swap, Front 2-Bay 2.5" HDD, Hot-swap, Rear (Option)
Storage Backplane	- RM35206T3RPF (RM35206H01*15671): Rear I/O, 1 x 6-Port 12Gbps SAS/SATA (1 x MiniSAS-HD + 2 x SATA) 1 x 2-Port 12Gbps SAS/SATA or NVMe U.2 (Option) - RM35206T3RPFU2 (RM35206-0040A0): Front I/O, 1 x 6-Port 12Gbps SAS/SATA (1 x miniSAS-HD + 2 x SATA) 1 x 2-Port 12Gbps SAS/SATA or NVMe U.2 (Option) - RM35206N4RPF (RM35206H04*15870): Rear I/O, 2x3 Port Nvme Gen4, 6x SlimSAS port - RM35206N4RPFU1 (RM35206-0060A0): Front I/O, 2x3 Port Nvme Gen4, 6x SlimSAS port
PSU Form Factor	2U Redundant CRPS (1+1), 1600W (80+, Platinum)
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0
Cooling Fans	4 x 80mm, PWM, 11000 RPM, Hot-swap
Expansion Slot	8 x Full Height (4 x Double-width GPU)
Supported Rack Mount Kit (Options)	- Slide Rail Kit w/ o CMA Support (2-Section): Works for 438 mm Width Rack Chassis, P2P: 26" to 33", Traveling Distance: 19", Tool-less - Cable Management Arm
Options	
384-MIX000098SA0:SK, HDD, 2Port HDD Cage Module/ Cable/ SAS/ SATA BP, RM35206	
384-MIX000132BA0:SK, 2Port HDD Cage Module/ Cable/ NVME Gen3, RM35206	

PRODUCT DESCRIPTION



• RM41300/RM41300-F



• RM41300-F1



Order code: RM41300-F1 (RM41300H02*12186)

- Includes:
- 1 x 1-door Front Bezel, Black
 - 1 x Fan Cage, w/1pcs 120mm, T25, PWM Fan, L650mm
 - 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 - 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 - 1 x PSU Bracket, PS/2, Rear Window Side
 - 1 x PSU Bracket, PS/2, Wire-Harness Side (RM42300-14C)
 - 1 x Add-on Card Retainer, 7-slot
 - 1 x USB 2.0 Cable, 2-port, 750mm
 - 1 x Intrusion Cable, 600mm
 - 1 x Switch/Reset Cable, 2P, 750mm
 - 1 x LED/Switch Cable, 750mm
 - Single Packing Carton, w/ Chenbro Logo

Order code: RM41300-FS81 (RM41300H03*12193)

- Includes:
- 1 x Top, w/2pcs 120*25mm PWM Fan , L650mm
 - 1 x Fan Cage, w/ 1pcs 120mm, T25, PWM Fan, L650mm
 - 1 x Exposed Drive Cage, 3 x 5.25" + 1 x 3.5", w/ anti-Vibration Kits
 - 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 - 1 x PSU Bracket, PS/2
 - 1 x 2-port USB 2.0 Cable, 750mm
 - 1 x LED & Switch Cable, 750mm
 - 1 x Switch/Reset Cable, 2P, 75mm
 - 1 x Intrusion Cable, 600mm
 - 2 x 80mm Fan, 3P3C, Two Ball Bearing, L650mm, on Rear Window
 - 1 x Front Bezel, 1-door, Black
 - 1 x Side Stand Kit, Foot Stand + Snap Rivet + Cabinet Ear for GPU Single Packing Carton, w/ Chenbro Logo

Order code: RM41300-F (RM41300H02*12185)

- Includes:
- 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 - 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 - 1 x Fan Cage, w/ 1pcs 120mm, T25, PWM Fan, L650mm
 - 1 x PSU Bracket, PS/2, Rear Window Side
 - 1 x PSU Bracket, PS/2, Wire-Harness Side
 - 1 x Add-on card Retainer, 7-slot
 - 1 x USB 2.0 Cable, 2-port, 750mm
 - 1 x Intrusion Cable, 600mm
 - 1 x Switch/Reset Cable, 2P, 750mm
 - 1 x LED/Switch Cable, 750mm
 - Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM41300-0120E0

- Includes:
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 2. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 3. 2 x 80mm Fan, 3P3C, Two Ball Bearing, L650mm, on Rear Window
 4. 1 x Fan Cage, w/1pcs 120mm, T25, PWM Fan, L650mm
 5. 1 x ATX PSU Bracket in Accessory Box
 6. 1 x CRPS 800W (1+1) PSU
 7. 1 x Add-on card Retainer, 8-slot
 8. 1 x USB 3.0 Cable, 2-port, 750mm (84H342310-012)
 9. 1 x Intrusion Cable, 600mm
 10. 1 x Switch/Reset Cable, 2P, 750mm
 11. 1 x LED/Switch Cable, 750mm
 12. 1 x 8-Slot PCIe 3.0 Rear window (384-41308-310000)
 13. 1 x 1-door Key Lock Front Bezel, Black (F1 Bezel 84H341310-004)
 14. 1 x L6/L5 Single Packing Carton, w/ Chenbro Logo

Order code: RM41300-F1U3 (RM41300-0080E0)

- Includes:
1. 1 x 1-door Front Bezel, Black
 2. 1 x Fan Cage, w/ 1pcs 120mm, T25, PWM Fan, L650mm
 3. 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 4. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 5. 1 x PSU Bracket, PS/2, Rear Window Side
 6. 1 x PSU Bracket, PS/2, Wire-Harness Side (RM42300-14C)
 7. 1 x Add-on Card Retainer, 7-slot
 8. 1 x USB 3.0 Cable, 2-port, 750mm
 9. 1 x Intrusion Cable, 600mm
 10. 1 x Switch/Reset Cable, 2P, 750mm
 11. 1 x LED/Switch Cable, 750mm
 12. Single Packing Carton, w/ Chenbro Logo

*Order code: RM41300-FS81U3 (RM41300H12*13729)*

- Includes:
1. 1 x Top, w/2pcs 120*25mm PWM Fan, L650mm
 2. 1 x Fan Cage, w/ 1pcs 120mm, T25, PWM Fan, L650mm
 3. 1 x Exposed Drive Cage, 3 x 5.25" + 1 x 3.5", w/ anti-Vibration Kits
 4. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 5. 1 x PSU Bracket, PS/2
 6. 1 x 2-port USB 3.0 Cable, 750mm
 7. 1 x LED & Switch Cable, 750mm
 8. 1 x Switch/Reset Cable, 2P, 75mm
 9. 1 x Intrusion Cable, 600mm
 10. 2 x 80mm Fan, 3P3C, Two Ball Bearing, L650mm, on Rear Window
 11. 1 x Front Bezel, 1-door, Black
 12. 1 x 1 x Side Stand Kit, Foot Stand + Snap Rivet + Cabinet Ear for GPU Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

Order code: RM41300-0030E0

- Includes:
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 2. 1 x 4-bay Internal 3.5" HDD Cage, w/ Anti-Vibration Kits
 3. 2 x 80mm Fan, 3P3C, Two Ball Bearing, L650mm, on Rear Window
 4. 1 x Fan Cage, w/ 1pcs 120mm, T25, PWM Fan, L650mm
 5. 1 x ATX PSU Bracket
 6. 1 x CRPS PSU Bracket in Accessory
 7. 1 x Add-on Card Retainer, 8-slot
 8. 1 x USB 3.0 Cable, 2-port, 750mm (84H342310-012)
 9. 1 x Intrusion Cable, 600mm
 10. 1 x Switch/Reset Cable, 2P, 750mm
 11. 1 x LED/Switch Cable, 750mm
 12. 1 x 8-Slot PCIe 3.0 Rear Window (384-41308-310000)
 13. 1 x 1-door Front Bezel, Black (F1 Bezel 84H341310-004)
 14. 1 x L6 Single Packing Carton, w/ Chenbro Logo

Options

1. 84H341310-005 Bezel, Two Doors, RM413/423
2. 84H341310-004 Bezel, One Door, RM413/423
3. 384-41311-3101A0 Fan, RM41300, Mix, Fan Module (8038)

PRODUCT DESCRIPTION



• RM41824 CRPS Main



• RM41824 CRPS Inside

Order code: *RM41824-0040G0 (24-port 12Gb/s mini-SAS HD Expander BP, 1200W CRPS, Slide Rail, 2.5" HDD CAGE)*

- Includes:
1. 1 x AS'Y MISCE., 12G MINI SAS HD (w/ expander), RM41824, 24PORT, w/ bracket
 2. 4 x 80mm Fan, PWM, T38, Two Ball Bearing, L90mm (Delta)
 3. 1 x Add-on card Retainer with 7pcs Card Latch
 4. 2 x Front USB 3.0 Connector with Cable 1000mm & Bracket
 5. 1 x Front LED Board, w/ Display Cable, 800mm
 6. 1 x Acbel 1+1 CRPS, R1CA2122A 1200W w/ Bracket & Screw
 7. 1 x Ball Bearing Slide Rail, 731 mm, Non-Toolless, 703.9 mm travel
 8. Double carton w/ Pallet, Chenbro Logo
 9. 2.5" HDD Cage AS'Y+BP, Bulk

PRODUCT DESCRIPTION



Model	RM43736
Series	RM43736E3RPCU1 (RM43736-0010A0)(Bundle SKU CMA+Rail)
M/B Form Factor	SSI EEB (12" x 13"), ATX (12" x 9.6"), mATX (9.6" x 9.6")
Dimension (D x W x H)	660.0 x 438.0 x 175.0 (mm) ; 25.98" x 17.24" x 6.88 "
Drive Bay	3 x 12 Bay 3.5" HDD Hot-swap Module, Front / Left / Right * Option: 2 Bay 2.5" HDD Hot-swap Module, Rear
Storage Backplane	12-port 12Gbps SAS Expander Backplane * Option: - 2 Port 12Gbps SAS/SATA - 2 Port NVMe Gen3 - 2 Port NVMe Gen4
PSU Form Factor	Redundant CRPS (1+1), 1200W (80+, Platinum)
Indicators	1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x HDD Status, 1 x System Alarm
Front Control	1 x Power On/Off, 1 x System Reset, 1 x UID, 1 x USB 3.0
Cooling Fans	Middle - 4 x 80 mm (T: 38mm), 14400RPM, PWM, Hot-swap, 5A Fan Board Rear - 4 x 80 mm (T: 38mm), 11000RPM, PWM, Hot-swap (Default) - 1 x 80 mm (T: 38mm), 11000RPM, PWM, Hot-swap (Option) - 3A Fan Board
System Security	Intrusion Switch
Expansion Slot	7 x Low Profile or 3 x Full Height (Option)
Included Supported Rack Mount kit	- Slide Rail Kit with CMA Support: Works for 438 mm width Rack Chassis, P2P: 26" to 36.7", Traveling Distance 28.5", Maximum Load Weight: 59KG, Tool-less: 384-RAL00001BA0
Included	Cable Management Arm (CMA): 84H349010-006
Net Weight	25KG/ pcs
Gross Weight	28.64KG/ CTN
Cubic Feet	5.34
Pallet Size (mm)	1200*840*120
Cartons per Pallet	6 pcs
Container Loading	20' FCL: 132pcs / 40' FCL: 276pcs (Single Packing + Pallet)

PRODUCT DESCRIPTION



• RM43348 CRPS Main

Order code: RM43348-0010C0: w/ 12Gbps min-SAS HD BP, 1200W CRPS, Rail

- Includes:
1. 1 x 24-port 12Gb/s mini-SAS HD Backplane, Left
 2. 1 x 24-port 12Gb/s mini-SAS HD Backplane, Right
 3. 1 x 2-bay 2.5" HDD Cage, w/2-port 6Gbps BP, Rear
 4. 1 x 3.5" HDD Holder, 2-bay
 5. CRPS, 1+1, 1200W, w/Power distribution board
 6. 4 x 80mm Fan, Dual Rotor, PWM, Ball Bearing, L35mm, w/ fan Holder
 7. 1 x PCBA, USB 2.0, Left
 8. 1 x PCBA, USB 2.0, Right
 9. 1 x Ball Bearing Slide Rail, 845 mm, Tool-less, 737 mm Travel
 10. DOUBLE CTN+PALLET

PRODUCT DESCRIPTION



*Order code: RM42200-1 (RM42200H03*6342)*

- Includes:
1. 1 x 120mm Fan, 3P3C, T25, Ball Bearing, L650mm
 2. 2 x 80mm Rear Fan Holder
 3. 1 x Air Filter, For 120mm Fan, Black
 4. 1 x Add-on card Retainer, 7-slot
 5. 1 x Control Panel w/ switch & LEDs
 6. 1 x 1-port USB 2.0 Cable, 700mm
 7. 1 x Intrusion Cable, 600mm
 8. Single Packing Carton, w/ Chenbro Logo

*Order code: RM42200-1U3 (RM42200H13*13814)*

- Includes:
1. 1 x 120mm Fan, 3P3C, T25, Ball Bearing, L650mm
 2. 2 x 80mm Rear Fan Holder
 3. 1 x Air Filter, For 120mm Fan, Black
 4. 1 x Add-on Card Retainer, 7-slot
 5. 1 x Control Panel w/ Switch & LEDs
 6. 1 x 1-port USB 3.0 Cable, 700mm
 7. 1 x Intrusion Cable, 600mm
 8. Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION



• RM42300-F



• RM42300-F1



• RM42300-F



• RM42300-F1

Order code: RM42300-F (RM42300H02*15325)

- Includes:
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ Anti-Vibration Kits
 2. 1 x 4-bay Internal 3.5" HDD Cage, w/ Anti-Vibration Kits
 3. 1 x PSU Bracket, PS/2, Rear Window Side
 4. 1 x PSU Bracket, PS/2, Wire-Harness Side
 5. 1 x Add-on Card Retainer, 7-slot
 6. 1 x USB 2.0 Cable, 2-port, 750mm
 7. 1 x Intrusion Cable, 600mm
 8. 1 x Switch/Reset Cable, 2P, 750mm
 9. 1 x Display Cable, 750mm
 10. Front 120mm Fan with Filter
 11. Single Packing Carton, w/ Chenbro Logo

Order code: RM42300-F1 (RM42300H02*15326)

- Includes:
1. 1 x Fan Cage, w/ 120mm, T25, PWM, L650mm
 2. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 3. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 4. 1 x PSU Bracket, PS/2, Rear Window Side
 5. 1 x PSU Bracket, PS/2, Wire-Harness Side
 6. 1 x Add-on card Retainer, 7-slot
 7. 1 x USB 2.0 Cable, 2-port, 750mm
 8. 1 x Intrusion Cable, 600mm
 9. 1 x Switch/Reset Cable, 2P, 750mm
 10. 1 x Display Cable, 750mm
 11. 1 x 1-door Front Bezel, Black
 12. Single Packing Carton, w/ Chenbro Logo

Order code: RM42300-FU3 (RM42300-0040E0)

- Includes:
1. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 2. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 3. 1 x PSU Bracket, PS/2, Rear Window Side
 4. 1 x PSU Bracket, PS/2, Wire-Harness Side
 5. 1 x Add-on Card Retainer, 7-slot
 6. 1 x USB 3.0 Cable, 2-port, 750mm
 7. 1 x Intrusion Cable, 600mm
 8. 1 x Switch/Reset Cable, 2P, 750mm
 9. 1 x Display Cable, 750mm
 10. Front 120mm Fan with Filter
 11. Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

*Order code: RM42300-FIU3 (RM42300H11*13739)*

- Includes:
1. 1 x Fan Cage, w/ 120mm, T25, PWM, L650mm
 2. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 3. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 4. 1 x PSU Bracket, PS/2, Rear Window Side
 5. 1 x PSU Bracket, PS/2, Wire-Harness Side
 6. 1 x Add-on card Retainer, 7-slot
 7. 1 x USB 3.0 Cable, 2-port, 750mm
 8. 1 x Intrusion Cable, 600mm
 9. 1 x Switch/Reset Cable, 2P, 750mm
 10. 1 x Display Cable, 750mm
 11. 1 x 1-door Front Bezel, Black
 12. Single Packing Carton, w/ Chenbro Logo

Order code: RM42300-F2 (RM42300-0050E0)

- Includes:
1. 1 x Fan Cage, w/ 120mm, T25, PWM, L650mm
 2. 1 x 3 x 5.25" + 1 x 3.5" External Drive Cage, w/ anti-Vibration Kits
 3. 1 x 4-bay Internal 3.5" HDD Cage, w/ anti-Vibration Kits
 4. 1 x PSU Bracket, PS/2, Rear Window Side
 5. 1 x PSU Bracket, PS/2, Wire-Harness Side
 6. 1 x Add-on card Retainer, 7-slot
 7. 1 x USB 2.0 Cable, 2-port, 750mm
 8. 1 x Intrusion Cable, 600mm
 9. 1 x Switch/Reset Cable, 2P, 750mm
 10. 1 x Display Cable, 750mm
 11. 1 x 1-door Front Bezel, Black
 12. Single Packing Carton, w/ Chenbro Logo

Options

1. 84H341310-005 Bezel, Two Doors, RM413/423
2. 84H341310-004 Bezel, One Door, RM413/423
3. 384-41311-3101A0 Fan, RM41300, Mix, Fan Module (8038)

PRODUCT DESCRIPTION



Model	DS252
Series	DS25224DD3RP5 (DS2522400-01*910796)
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm); 17.72" x 17.24" x 3.43"
Drive Bay	24 Bay 2.5" Hot-Swap
Storage Backplane	2.5" 8-port 12Gbps SAS, Dual-port (3)
PSU Form Factor	550W 1+1 CRPS
Front Indicators	1 x Power Status, 1 x UID, 1 x System Status
Front Control	1 x Power On/Off, 1 x UID
Cooling Fans	Rear: 80mm (3), T=38mm, Hot-swap
SAS Expander	40-port Expander (2)

PRODUCT DESCRIPTION




Model	DL25212-0010A0
Dimension (D x W x H)	450.0 x 438.0 x 87.0 (mm); 17.72" x 17.24" x 3.43"
Drive Bay	12 Bay 3.5" HDD Hot Swap Module, Front
Storage Backplane	12 x 3.5" SAS4 Backplane
PSU Form Factor	Redundant CRPS (1+1), 550W (80+ Platinum)
Indicators	1 x Power Status, 1 x UID, 1 x System Status
Front Control	1 x Power On/Off, 1 x UID
Cooling Fans	3 x 80mm(T:38MM) Fan Module, 11000 RPM, PWM, Hot-swap
Slide Rail	Slide Rail Kit can support CMA: Works for 438 mm Width Rack Chassis, P2P 26 to 33", Traveling Distance 19", Tool-Less
Metal Thickness	1.2mm
Materials	SGCC
Net Weight	11.8 KG/ pcs
Gross Weight	14.8 KG/ CTN
Cubic Feet	2.8
Pallet Size	1200 x 760mm
Cartons Per Pallet	8 Pcs
Container Loading	20' FCL: 208pcs/ 40' FCL: 448pcs

PRODUCT DESCRIPTION

Features


- ASRock® Server Board E3C252D4U
- Supports M/B size up to Micro-ATX (9.6" x 9.6")
- Supports Intel® Xeon® E-2300 and 10th Gen Intel® Pentium® series processors, Single Socket H5 (LGA1200)
- 4 DIMM slots (2DPC), supports DDR4 ECC/non-ECC UDIMM
- 1U single 400W (80+ Platinum)
- 1 x PCIe 4.0 x16 , FHHL
- Intel® C252 (6 SATA 6Gb/s; RAID 0/1/5/10) : 5 SATA 7-pin, 1 SATA DOM or 1 M.2

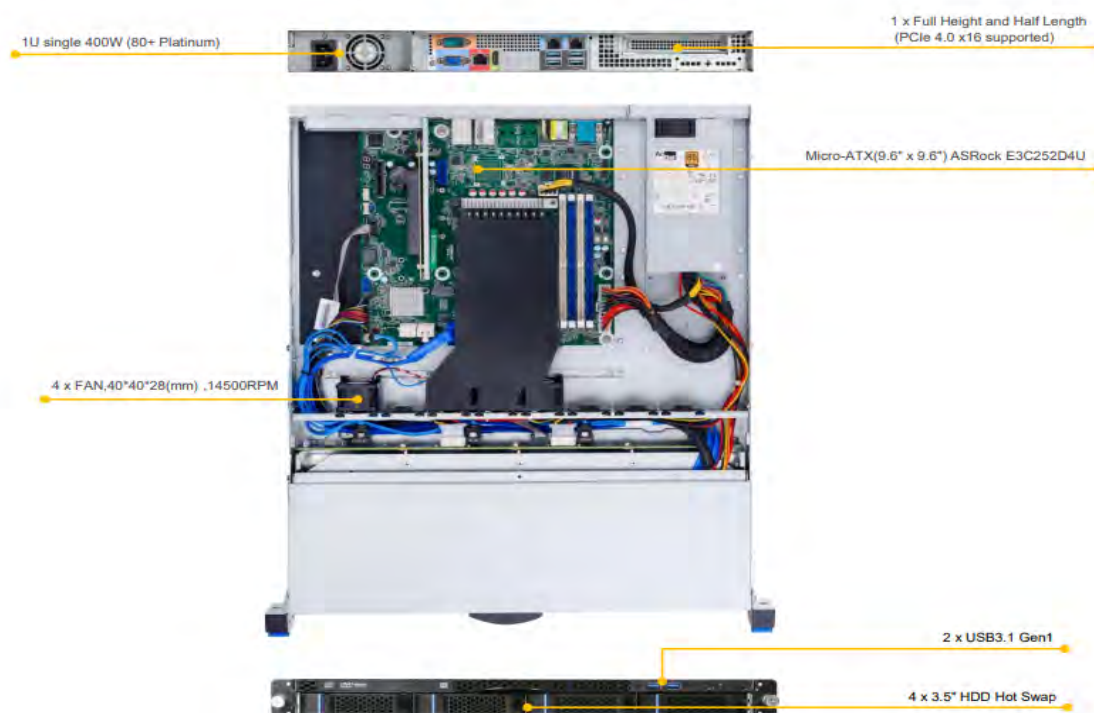

Order code: **RB1460401-0010A0**

- Includes:
1. M/B Form Factor Micro-ATX (9.6" x 9.6") ASRock E3C252D4U
 2. Drive Bay 4 x 3.5" HDD Hot Swap
 3. Storage Backplane 3.5" 4-port 12 Gb/s, SAS/SATA
 4. Indicators 1 x Power Status, 2 x LAN Activity, 1 x UID, 1 x System Alarm, 1 x HDD Status
 5. Front Control 1 x Power On/Off, 1 x System Reset, 2 x USB 3.1 Gen1
 6. Cooling Fans 4 x FAN, 40*40*28 (mm), 14500RPM
 7. PCIE Slot 1 x Full Height and Half Length (PCIe 4.0 x16 supported)
 8. Slide Rail Works for 438mm Width Rack Chassis, P2P: 21.5" to 33.5", Traveling Distance 27.7", maximum
 9. Load weight 39KG
 10. PSU Form Factor 1U Single 400W (80+ Platinum)
 11. 1 x Single Packing Carton, w/ Chenbro Logo

PRODUCT DESCRIPTION

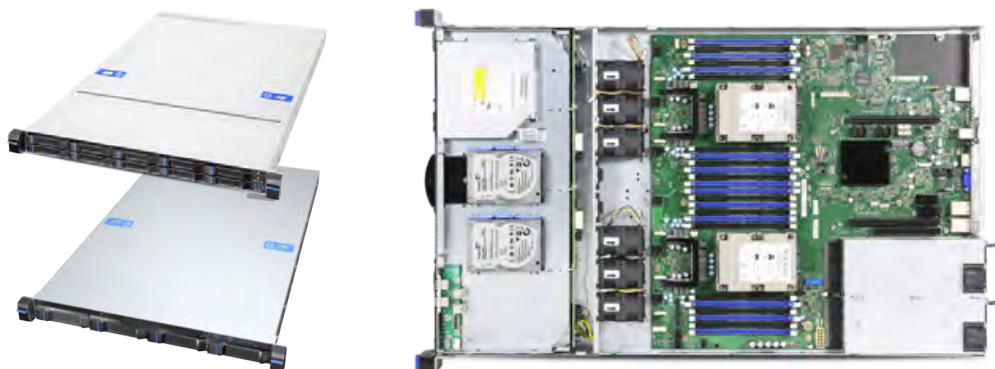

Model	RB138
Series	RB13804N4WFTU1 (RB13804H01*15121)
Dimension (D x W x H)	735.0 x 438.0 x 43.2 (mm); 28.93" x 17.24" x 1.70"
Drive Bay	4x3.5" hotswap support, SAS/SATA,NVMe 10x2.5" Hotswap support, SAS/SATA,NVMe
MotherBoard	Intel S2600WFTR
Support CPU	Intel® Xeon® Scalable Cascadlake Maximum TDP to 165W
Support Memory	24x DIMM Slot, UDIMM ECC DDR4 2666/2400
Chipset	Intel C624
Rear I/O	2*USB 3.0, 1*VGA, 2*10GBe, 1* Management Port
Front I/O	2x USB 3.0
HDD Backplane	12G Mini-SAS HD SAS BP, 6G SATA Compatible
PSU Form Factor	1+1 800W CRPS Redundant
Front Control	Power On/off, UID 1 x Power Status, 1 x UID, 2 x LAN Activity, 1 x HDD Status, 1 x Global Failure Alarm
System Management	ASPEED AST2500, IPM, Redfish
Cooling Fan	Middle: 6x 40 Fixed Fan
Expansion Slot	2x Full Height & Half Length, PCIe x16
Front Bezel	Option support

PRODUCT DESCRIPTION



Model	RB151FCP
Series	RB13804N4WFTU1 (RB13804H01*15121)
Ethernet	OCP 3.0 Module Support for 1/10/25/40/50/100GbE (Option)
Drive Bay	12 x 2.5" NVMe Tray-less, Hot Swap; Support NVMe Gen4
MotherBoard	Intel M50FCP2SBSTD
Expansion Slot	Riser 1 (CPU#0) - 1 x PCIe 5.0 x16, Low-Profile * P/N# Intel FCP1URISER1 Riser 2 (CPU1): - 1 x PCIe 5.0 x16, Low-Profile * P/N# Intel FCP1URISER2
Video	Integrated 2D video Controller in BMC with 128M DDR4 Video Memory
Rear I/O	3 x USB 3.0, 1 x VGA, 1 x RJ45 Serial Port A, 1 x RJ45 Management Port
Indicator	1 x System Status, 1 x HDD Activity
Front Control	1 x Power On/ off, 1 x System Reset, 1 x ID Button, 1 x USB 3.0, 1 x USB 2.0
Cooling Fan	8 x 40mm Middle Fix Fan, PWM, Dual Rotors, 23000 RPM
Management	AST2500 BMC with RMM4 Lite, IPMI and Redfish Support
Power Supply	1300W 1+1 CRPS, 80+ Platinum
Slide Rail	Slide Rail Kit w/ o CMA support (2-Sections): Works for 438 mm Width 1U/2U Rack Chassis, P2P: 26" to 33", Traveling Distance 22", Maximum Load Weight: 31kg, Tool-less (*CMA Support for 3-Sections Slide Rail Kit, Option)
Options	Description
384-15103-3301A0	Rail, Travel:820MM, Chassis W:438.5MM, Tool-less, Non-auto Lock

PRODUCT DESCRIPTION




Model	RB237
Series	RB23708M3WFTU2 (RB23724H01*15064) /RB23712E3RP8WFT/RB23724E3RPCWFT
Dimension (D x W x H)	735.0 x 438.5 x 87 (mm); 28.93" x17.26" x3.43"
MotherBoard	Intel S2600WFTR
Support CPU	Intel® Xeon® Scalable Cascadlake Maximum TDP to 165W
Support Memory	24x DIMM Slot, UDIMM ECC DDR4 2666/2400
Chipset	Intel C624
Rear I/O	2*USB 3.0, 1*VGA, 2*10GbE, 1* Management Port
Front I/O	1*USB 3.0, 1*USB 2.0
Drive Bay	8x3.5" Hotswap Support 12x3.5" Hotswap Support 24x2.5" Hotswap Support
HDD Backplane	12G Mini-SAS HD SAS BP, 6G SATA Compatible
PSU Form Factor	1+1 800W CRPS Redundant
Front Control	Power on/off, System Reset, UID 1 x Power Status, 1 x UID, 2 x LAN Activity, 1 x HDD Status, 1 x Global Failure Alarm
System Management	ASPEED AST2500, IPM, Redfish
Cooling Fan	Middle: 6x 60 Fixed Fan
Expansion Slot	6*PCIe x8, 2*PCIe x4, Gen3 Or 2*PCIe x16, 2* PCIe x8, 2*PCIe x4
Front Bezel	Option Support
Low Profile Heatsink	2X Included
Slim ODD kit	Included
Riser Cards (Included)	Full Height, TwoX16 and oneX8 +1x Low Profile, TwoX8
Rails	Option 384-23803-3300D0 or 84H314610-003
3.5"/2.5" Non-Toolless HDD tray	Option 384-14602-3124A0

PRODUCT DESCRIPTION



Model		RB245
Series		RB24508-0010A0
Dimension (D x W x H)		557.2 x 438 x 87 (mm); 21.94" x17.24" x3.43"
MotherBoard		ASRock Rack B650D4U Server Board
Support CPU		Supports AMD Ryzen 7000 Series
Support Memory		4 DIMM Slots, up to 128 GB Memory
Heatsink		2U Active Heatsink
Drive Bay		Up to 8 3.5" Hot-Swappable Drives via SATA Interface
HDD Backplane		12Gb/s Mini-SAS HD Backplane
PSU Form Factor		Single Flex 500W
Cooling Fan		80*38, 7500RPM, PWM
Expansion Slot		PCIe 5.0: 2 Slots PCIe 4.0: 1 Slot
Options		Description
Front Bezel		384-23705-3107A0/384-23705-3107B0

PRODUCT DESCRIPTION

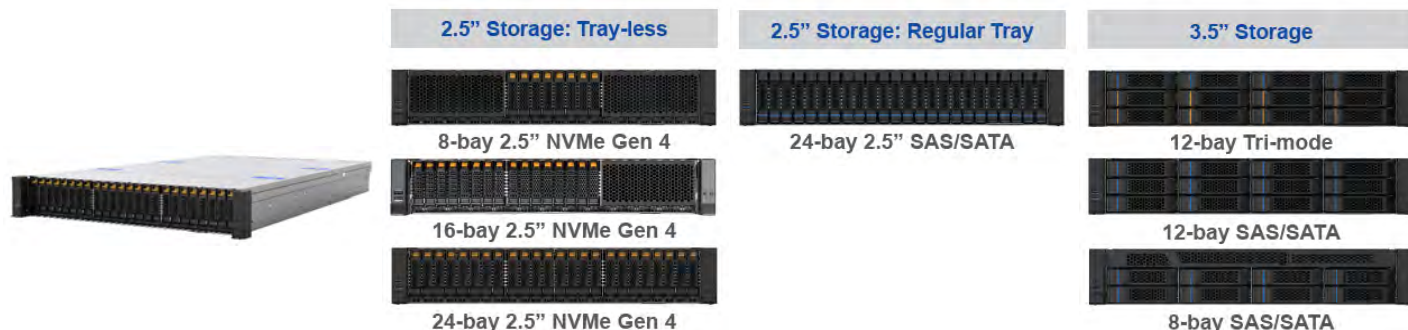

Model	RB251 Series 2U High Performance Computing Server
Chassis Type	2U Rack
Dimension (D x W x H)	770 x 438 x 87 (mm); 30.32" x17.24" x3.42"
MotherBoard	Intel M50CYP2SBSTD (Coyote Pass)
CPU	3rd Gen Intel Xeon Scalable Product Family, up to 270W; Dual Socket-P4 LGA4189
Chipset	C621A
CPU Heatsink	2U Passive with Air Duct (or 1U Passive with Air Duct - GPGPU Required)
Memory support	32 DIMMs (16 per CPU), 8 Channels Support DDR4 3200 RDIMM/LRDIMM or 3DS-RDIMM/LRDIMM
Onboard PCIe NVMe	8 x SlimSAS (SFF-8654), Four per CPU * Intel VROC 7.5 Support Using VROC Key (Option)
Onboard SATA	10 x SATA III Ports Support 2 x M.2 SATA/PCIe Gen 3.0 & 2 x Mini-SAS HD (SFF-8643)
Drive Bay	2 x internal 2.5" SSDs (Rear) 2.5" SKUs: - 8 x 2.5" Tray-less, Hot-swap; Support NVMe Gen 4 (up to 16 or 24-Bay, Option) - 24 x 2.5" Tool-less, Hot-swap; Support SAS/SATA 3.5" SKUs: - 8 x 3.5" Tool-less, Hot-swap; Support SAS/SATA - 12 x 3.5" Tool-less, Hot-swap; Support 8 x Tri-mode NVMe Gen 3 or SAS/SATA & 4 x SAS/SATA
Expansion Slot	PCIe 5.0: 2 slots
Ethernet	OCP 3.0 Module Support for 1/10/25/40/50/100GbE (Option)
Video	Integrated 2D Video Controller in BMC with 128M DDR4 Video Memory
Rear I/O	3 x USB 3.0, 1 x VGA, 1 x RJ45 Serial Port A, 1 x RJ45 Management Port
Indicator	1 x System Status, 1 x HDD Activity
Front Control	1 x Power On/Off, 1 x System Reset, 1 x ID Button, 1 x USB 3.0, 1 x USB 2.0
Cooling Fan	6 x 60mm Middle Hot-swap System Fan, PWM, 23000 RPM
Management	AST2500 BMC with RMM4 Lite, IPMI and Redfish Support

PRODUCT DESCRIPTION	
Power Supply	2000W 1+1 CRPS, 80+ Platinum
Slide Rail	Slide Rail Kit w/ o CMA Support (2-Sections): Works for 438 mm Width 1U/2U Rack Chassis, P2P: 26" to 33", Traveling Distance 22", Maximum Load Weight: 31kg, Tool-less (* CMA Support for 3-Sections Slide Rail Kit, Option)
Expansion Slot	Up to 8-slot PCIe 4.0: 6 x Full-height and 2 x Half-height Riser 1 (CPU#0): 3-slot PCIe 4.0 - 1 x PCIe 4.0 x16 (x16 lanes), FHFL - 1 x PCIe 4.0 x16 (x8 lanes), FHFL - 1 x PCIe 4.0 x8 (x8 lanes), FHFL * P/N# Intel CYP2URISER1STD Riser 2 (CPU#1): 3-slot PCIe 4.0 - 1 x PCIe 4.0 x16 (x16 lanes), FHFL - 1 x PCIe 4.0 x16 (x8 lanes), FHFL - 1 x PCIe 4.0 x8 (x8 lanes), FHFL * P/N# Intel CYP2URISER2STD Riser 3 (CPU#1): 2-slot PCIe 4.0 - 2 x PCIe 4.0 x16 (x8 lanes), LPHL * P/N# Intel CYP2URISER3STD
Order Number	Description
RB25112N8T4RPJSTD (RB2511201-01*899507)	2U 12-Bay 3.5" 8T4S (Tri-mode) Server (2000W 1+1) 2U 12-Bay 3.5", Tri-mode: 8T4S BP, 8 x PCIe 3.0, 2000W 1+1, 2-sections Rail Kit
RB25112E3RPJSTD (RB2511202-01*899509)	2U 12-Bay 3.5", SAS/SATA BP, 2000W 1+1, 2-sections Rail Kit 2U 12-Bay 3.5" SAS/SATA Server (2000W 1+1)
Options	Description
384-15103-3301A0	Rail, Travel:820MM, Chassis W:438.5MM, Tool-less, Non-auto Lock

PRODUCT DESCRIPTION



Model RB251I203-002000 Series 2U High Performance Computing Server	
Chassis Type	2U Rack
Dimension (D x W x H)	770 x 438 x 87 (mm); 30.32" x17.24" x3.43"
MotherBoard	Intel M50FCP2SBSTD
CPU	4rd Gen Intel Xeon Scalable Product Family, up to 270W; Dual Socket E LGA4766
CPU Heatsink	2U Passive
Memory	32 Memory Slots Total 8 Memory Channels per Processor 2 Memory Slots per Channel - Registered SDRAM DDR5 DIMMs (RDIMM, 3DS-RDIMM, and 9x4 RDIMM) Note: 3DS = 3-dimensional Stacking. - All DIMMs Must Support ECC - Memory Capacity: Up to 4 TB per Processor (Processor SKU Dependent) Using DDR5 DIMMs - Up to 4800 MT/s at one RDIMM per Channel (Processor SKU Dependent) - Up to 4400 MT/s at two RDIMMs per Channel (Processor SKU Dependent)
Drive Bay	2 x internal 2.5" SSDs (Rear) 2.5" SKUs: - 8 x 2.5" Tray-less, Hot-swap; Support NVMe Gen 4 (up to 16 or 24-Bay, Option) - 24 x 2.5" Tool-less, Hot-swap; Support SAS/SATA 3.5" SKUs: - 8 x 3.5" Tool-less, Hot-swap; Support SAS/SATA - 12 x 3.5" Tool-less, Hot-swap; Support 8 x Tri-mode NVMe Gen 3 or SAS/SATA & 4 x SAS/SATA
Rear I/O	3 x USB 3.0, 1 x VGA, 1 x RJ45 Serial Port A, 1 x RJ45 Management Port
Indicator	1 x System Status, 1 x HDD Activity
Front Control	1 x Power On/Off, 1 x System Reset, 1 x ID Button, 1 x USB 3.0, 1 x USB 2.0
Cooling Fan	6 x 60mm Middle Hot-swap System Fan, PWM, 23000 RPM
Management	AST2600 Advanced PCIe Graphics and Remote Management Processor
Power Supply	2100W 1+1 CRPS, 80+ Platinum
Slide Rail	Slide Rail Kit w/ o CMA Support (2-Sections): Works for 438 mm Width 1U/2U Rack Chassis, P2P: 26" to 33", Traveling Distance 22", Maximum Load Weight: 31kg, Tool-less (* CMA Support for 3-Sections Slide Rail Kit, Option)

PRODUCT DESCRIPTION

Expansion Slot	Riser 1 3-slot PCIe 5.0 Supports x32 PCIe Lanes, Routed from CPU 0 - One FH/FL Single-width Slot (x16 Electrical, x16 Mechanical) - One FH/FL Single-width Slot (x8 Electrical, x16 Mechanical) - One FH/HL Single-width Slot (x8 Electrical, x8 Mechanical) * P/N# Intel FCP2URISER1STD Riser 2 3-slot PCIe 5.0 Supports x32 PCIe Lanes, Routed from CPU 1 - One FH/FL Single-width Slot (x16 Electrical, x16 Mechanical) - One FH/FL Single-width Slot (x8 Electrical, x16 Mechanical) One FH/HL Single-width Slot (x8 Electrical, x8 Mechanical) - 1 x PCIe 5.0 x16 (x16 Lanes), FHFL - 1 x PCIe 5.0 x16 (x8 Lanes), FHFL - 1 x PCIe 5.0 x8 (x8 Lanes), FHFL * P/N# Intel FCP2URISER2STD Riser 3 3-slot PCIe 5.0 Supports x16 PCIe Lanes, Routed from CPU 1 - Two LP/HL Single-width Slots (x16 Mechanical, x8 Electrical)
----------------	---

PRODUCT DESCRIPTION



Model	TB1156901-0010A0
Dimension (D x W x H)	602.6 x 180.0 x 438.0 (mm); 23.72" x7.09" x17.24"
MotherBoard	GIGABYTE MU72-SU0 ATX (12" x 9.6")
CPU	Intel® Xeon® W-3300 Processor Family
Chipset	Intel® C621A
Memory support	8 x DIMMs, 8-Channel RDIMM/LRDIMM DDR4, Supports Intel® Optane™ Persistent Memory 200 Series
Onboard SATA	3 x Slim SAS for 12 x SATA 6Gb/s Ports
Drive Bays	4-Bay External HDD Hot-swap Module with 80mm Fan, 4500RPM
PCIe slot	7 x PCIe Gen4 X16 Slots
Ethernet	2 x 1Gb/s LAN ports (Intel® I210-AT) 1 x 10/100/1000 management LAN
Video	1 x VGA
Rear I/O	4 x USB 3.0, 1 x VGA, 1 x COM, 2 x RJ45, 1 x MLAN, 1 x ID Button with LED
HDD Backplane	3.5" 4-port 12 Gb/s, SAS/SATA
PSU Form Factor	PSU ATX FSP 1200W
Indicators	1 x Power Status, 1 x HDD Activity, 2 x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fan	- Front Fan : 1 x 120mm (T:25mm) Fan Support 2600RPM, and Fix Fan in the Middle, 1 x 80mm fan 4500RPM - Rear Fan : 2 x 80mm (T:38mm) Fan Support 8200RPM
Expansion Slot Opening	7 x Full Height
System Security	Intrusion Switch; Key Lock on the Front Door
Management	Aspeed® AST2600 Management Controller
Heatsink	3U Active (3000RPM)
Slide Rail	Rack handles, Slide Rail Kit can Support CMA - Works for 438 mm Width Rack Chassis, P2P: 26" to 36.7", Traveling Distance 28.5", Tool-less

PRODUCT DESCRIPTION	
Metal Thickness	1.2 mm
Materials	SGCC
Net Weight	16.85 KG
Gross Weight	23 KG
Cubic feet	6.934
Options	Description
384-MEC000327BA0	Rack Handles (a set, Left and Right), 50 Sets/ carton
84H349010-006	Cable Management Arm (CMA)
384-MIX00411B0A0	4-Bay Internal HDD Cage w/ 80mm Fan, 4500RPM
SK32801H01*15188	8 Bay 2.5" SAS/SATA Hot Swap Module, SK32801 Convert Kit: 2 x 5.25" to 8 x 2.5" External
SK41101H01*10879	Convert Kit: 1 x 5.25" to 1 x Internal 3.5", 48pcs/ carton

PRODUCT DESCRIPTION***SR10569-C4+ (SR10569H09*14541)***

- Includes:
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm Fan, PWM, T25 + L650mm, 2600RPM with Finger Guard, Rear
 3. 1x 120mm Fan Holder, Green
 4. 1x Metal Key Lock, on Side Cover
 5. 6x 5.25" Device Rail, w/ holder Box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch cable, 2P2C, 1100mm
 8. 2x Plastic Holder for Front Fan
 9. 1x 2-port USB 3.0 cable, 900mm
 10. 1x Cable SW. (Power, Reset, Alarm Mute), 800mm
 11. 1x Cable, LED Display, 800mm
 12. 1x EMI Liner, Bottom Edge, 445mm
 13. 1x EMI Liner, Rear Edge, 200mm
 14. 1x Single Packing Carton w/ Chenbro Logo
 15. 1x 4-bay Cage, 3.5", Non Hot-swap
 16. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD cage

SR10569-C4+-R800 (SR10569-0040A0)

- Includes:
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm Fan, PWM, T25 + L650mm, 2600RPM with Finger Guard, Rear
 3. 1x 120mm Fan Holder, Green
 4. 1x Metal Key Lock, on Side Cover
 5. 6x 5.25" Device Rail, w/ holder box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch Cable, 2P2C, 1100mm
 8. 2x Plastic Holder for Front Fan
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Cable SW. (Power, Reset, Alarm Mute), 800mm
 11. 1x Cable, LED display, 800mm
 12. 1x EMI Liner, Bottom Edge, 445mm
 13. 1x EMI Liner, Rear Edge, 200mm
 14. 1x Single Packing Carton w/ Chenbro Logo
 15. 1x 4-bay Cage, 3.5", Non Hot-swap
 16. 1x 800W, 1+1, Redundant CRPS PSU
 17. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage

PRODUCT DESCRIPTION

SR10569-C4+-R1200 (SR10569-0020A0)

- Includes:
1. 1x SR10569 Front Bezel, Black
 2. 1x 120mm Fan, PWM, T25 + L650mm, 2600RPM with Finger Guard, Rear
 3. 1x 120mm Fan Holder, Green
 4. 1x Metal Key Lock, on Side Cover
 5. 6x 5.25" Device Rail, w/ holder Box
 6. 4x Foot Stand, Black
 7. 1x Intrusion Switch Cable, 2P2C, 1100mm
 8. 2x Plastic Holder for Front Fan
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Cable SW. (Power, Reset, Alarm Mute), 800mm
 11. 1x Cable, LED Display, 800mm
 12. 1x EMI Liner, Bottom Edge, 445mm
 13. 1x EMI Liner, Rear Edge, 200mm
 14. 1x Single Packing Carton w/ Chenbro Logo
 15. 1x 4-bay cage, 3.5", Non Hot-swap
 16. 1x 1200W, 1+1, Redundant CRPS PSU
 17. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD cage

PRODUCT DESCRIPTION***SR10769-C8+ (SR10769H09*14584)***

- Includes:
1. 1x SR10769 Front Bezel, Black
 2. 2x 4-bay Cage, 3.5", Non Hot-swap
 3. 2x 120mm Fan, PWM, Ball Bearing, L350mm, w/ finger Guard, Middle
 4. 1x 120mm Fan, PWM, Ball Bearing, L650mm, w/ finger Guard, Rear
 5. 3x 120mm Fan Holder, Green
 6. 6x 5.25" Device Rail, w/ holder Box
 7. 1x 3.5" Exposed Device Holder, Metal
 8. 4x Foot Stand, Black
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Intrusion Switch Cable, 2P2C, 1100mm
 11. 1x Cable SW. (Power, Reset, Alarm mute), 1100mm
 12. 1x Cable, LED Display, 1100mm
 13. 1x PS/2 PSU Mounting Bracket
 14. 1x EMI Liner for PCI Slot Window
 15. 1x Single Packing Carton with Chenbro Logo+ Paper Pallet

SR10769-C8+-R1200 (SR10769-0040B0)

- Includes:
1. 1x SR10769 Front Bezel, Black
 2. 2x 4-bay Cage, 3.5", Non Hot-swap
 3. 2x 120mm Fan, PWM, Ball Bearing, L350mm, w/ finger Guard, Middle
 4. 1x 120mm Fan, PWM, Ball Bearing, L650mm, w/ finger Guard, Rear
 5. 3x 120mm Fan Holder, Green
 6. 6x 5.25" Device Rail, w/ holder Box
 7. 1x 3.5" Exposed Device Holder, Metal
 8. 4x Foot Stand, Black
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Intrusion Switch Cable, 2P2C, 1100mm
 11. 1x Cable SW. (Power, Reset, Alarm mute), 1100mm
 12. 1x Cable, LED Display, 1100mm
 13. 1x PS/2 PSU Mounting Bracket
 14. 1x EMI Liner for PCI Slot Window
 15. 1x 1200W, 1+1, Redundant CRPS PSU
 16. 1x Single Packing Carton with Chenbro Logo+ Paper Pallet

PRODUCT DESCRIPTION

SR10769-C8+-R800 (SR10769-0030B0)

- Includes:
1. 1x SR10769 Front Bezel, Black
 2. 2x 4-bay Cage, 3.5", Non Hot-swap
 3. 2x 120mm Fan, PWM, Ball Bearing, L350mm, w/ finger Guard, Middle
 4. 1x 120mm Fan, PWM, Ball Bearing, L650mm, w/ finger Guard, Rear
 5. 3x 120mm Fan Holder, Green
 6. 6x 5.25" Device Rail, w/ holder box
 7. 1x 3.5" Exposed Device Holder, Metal
 8. 4x Foot Stand, Black
 9. 1x 2-port USB 3.0 Cable, 900mm
 10. 1x Intrusion Switch Cable, 2P2C, 1100mm
 11. 1x Cable SW. (Power, Reset, Alarm mute), 1100mm
 12. 1x Cable, LED Display, 1100mm
 13. 1x PS/2 PSU Mounting Bracket
 14. 1x EMI Liner for PCI Slot Window
 15. 1x 800W, 1+1, Redundant CRPS PSU
 16. 1x Single Packing Carton with Chenbro Logo+ Paper Pallet

PRODUCT DESCRIPTION



Model	SR11308M3RPJ (SR11369H01*15554)
Dimension (D x W x H)	680.0 x 438.0 x 175.0 (mm); 26.77" x17.24" x6.89"
M/B Form Factor	Proprietary (15.12" x 13.2"): SMC X11DGP-QT/X11DPX-T Proprietary (14.23" x 13.24"): Tyan S7105 SSI EEB (12"x 13"): 8-slot SKU Only
Drive Bay	External: 2 x 5.25" and 1 x 3.5" Hot-Swap: 2 x 4-Bay 3.5" SAS/SATA HDD Module
Storage Backplane	12Gb/s, Mini SAS HD Connector
PSU Form Factor	Redundant CRPS 1+1,2000W (80+ Platinum) Single PSU (PS/2 form factor) for 8-slot/EEB SKU only
Indicators	1 x Power Status, 1 x HDD Activity, 2x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fans	Middle (Default): 4 x 80 (mm), PWM, 11000 RPM, Hot-Swap Rear CPU Fan Module for Internal: 2 x 80 (mm), PWM, 8200 RPM, Fixed (Option) Rear GPU Hot-swap Fan for External: 2 x 80 (mm), PWM, 11000 RPM, Hot-swap (Option)
System Security	Intrusion Switch (Option); Key Lock on Front Bezel (Option)
Expansion Slot	11 x Full Height and Full Length (Up to Double Width 5-GPU Support)
Supported Rack Mount Kit (Options)	- Rackmount Ear Handle - Slide Rail Kit with CMA Support: Works for 438 mm Width Rack Chassis, P2P: 26" to 36.7", Traveling Distance 28.5", Maximum Load Weight: 59KG, Tool-less
Options	Description
SK32801M3	SK, 2.5" 8BAY, SK32801, w/ 2.5" HDD Tray+Fan Holder
384-RAL00001BA0	Rail, Travel: 724.4mm, Chassis w/ 438mm, Tool-less, BUL, SR11369
384-FAN000003BA0	Fan AS'Y, Bulk, REV.A, CPU Fan
384-11311-2100A0	Fan Module, For GPU, SR11369
384-MEC000327BA0	Bracket, Cabinet Ear+Handle, Bulk, SR11369
384-PCB00034B0A0	Option Part: 8 Bay 2.5" NVMe Gen 3 Hot Swap Upgrade Kit (Fit 2x 5 1/4)
384-PCB00033B0A0	Option Part: Tri-mode 4+8 Gen3 2.5" HDD CAGE BP, Bulk, 2X5.25", Tool-less, N4, w/ o Fan, SR113

PRODUCT DESCRIPTION



Model	SR11569-0030A0
Dimension (D x W x H)	581.9 x 438.0 x 175.0 (mm); 22.91" x 17.24" x 6.89"
M/B Form Factor	EEB (12" x 13"); ATX (12" x 9.6")
Drive Bay	External: 2 x 5.25" and 1 x 3.5" Internal: 4 x 3.5"
PSU Form Factor	Support ATX & CRPS (1+1)
Front Panel Controller	Support Loose-Pin, SSI, MiniSSI
Indicators	1 x Power Status, 1 x HDD Activity, 2x LAN Activity
Front Control	1 x Power On/Off, 1 x System Reset, 2 x USB 3.0, 1 x Audio Combo
Cooling Fans	1 x 80x25 (mm) for HDD/CPU 1 x 120x25 (mm) for GPU/PCIe Card
System Security	Key Lock Bezel
GPU Bracket	Support RTX2080, RTX3080
Expansion Slot	8 x Full Height and Full Length
Options	Description
384-RAL00001BA0	Rail, Travel: 724.4MM, Chassis w/ 438MM, Tool-Less, BUL, SR11369
384-FAN000003BA0	Fan AS'Y, Bulk, REV.A, CPU Fan
384-11311-2100A0	Fan Module, For GPU, SR11369
384-FAN00296S0A0	Liquid Module, SR1156901, Fan Module, Single, Alphacool 120MM

PRODUCT DESCRIPTION



SR20969-C4+ (SR20969H11*14542)

- Includes:
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x Single Packing Carton w/ Chenbro Logo

SR20969-C4+-R800 (SR20969-0010B0)

- Includes:
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder Box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, Bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x 800W, 1+1, Redundant CRPS PSU
 17. 1x Single Packing Carton w/ Chenbro Logo

PRODUCT DESCRIPTION


SR20969-C4+-400 (SR20969-0020B0)

- Includes:
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder Box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, Bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x 400W, Single ATX PSU
 17. 1x Single Packing Carton w/ Chenbro Logo

SR20969-C4+-R1200 (SR20969-0030B0)

- Includes:
1. 1x SR20969 Front Bezel, Black
 2. 1x 4-bay Cage, 3.5", Non Hot-swap
 3. 1x Fan, 80mm, Ball Bearing, L650mm, 3P3C, for HDD Cage
 4. 1x Fan, 120mm, Ball Bearing, L650mm, PWM, with Finger Guard
 5. 1x 120mm Fan Holder, Green
 6. 1x Metal Key Lock (on Rear Panel)
 7. 6x 5.25" Device Rail, w/ holder Box
 8. 4x Foot Stand, Black
 9. 1x Intrusion Switch Cable, 2P2C, 800mm
 10. 2x Plastic Holder for Front Fan
 11. 1x 2-port USB 3.0 Cable, 900mm
 12. 1x Cable SW. (Power, Reset, Alarm mute), 800mm
 13. 1x Cable, LED Display, 800mm
 14. 1x EMI Liner, Bottom Edge, 400mm
 15. 1x EMI Liner, Rear, 200mm
 16. 1x 1200W, 1+1, Redundant CRPS PSU
 17. 1x Single Packing Carton w/ Chenbro Logo

PRODUCT DESCRIPTION

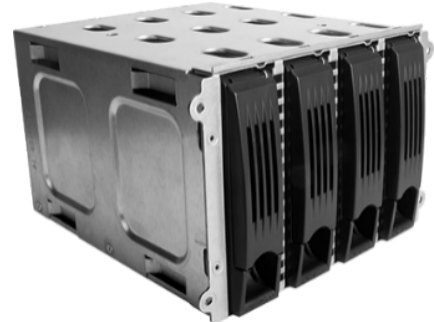

SR30169T3FP3U1 (SR30169H01*15676)

- Includes:
1. 1x SR30169 Front Bezel, Silver& Black
 2. 1 x 120mm Fan, T=25mm, PWM, 1450RPM, L300mm
 3. 1 x 120mm Fan Holder, Blue
 4. 1 x Air Duct for Cage Fan
 5. 4 x 3.5" Non Tool-less HDD Trays
 6. 1 x 12Gbps SAS&SATA Backplane
 7. 2 x 2.5" Internal HDD Brackets
 8. 1 x Display Cable, SW/LED/FAIL, PWR/HDD /FAIL LED:Blue/Blue/Red, 500mm
 9. 1 x Intrusion Switch w/ 600mm 2-wire Cable
 10. 1 x Internal PSU Adapter Cord, 150/100mm
 11. 1 x 2-port USB 3.0 Cable, 510mm
 12. 1 x Single 300W PSU
 13. 1 x Single Packing Carton (Brown Box)



CHENBRO